

[Manuals.plus](#) /

› [maXpeedingrods](#) /

› maXpeedingrods 4000 Watt Inverter Generator Portable, Bluetooth® App Remote Data Monitor, RV Ready, Gas Powered Generator with CO Alarm for Outdoor Camping, Home Backup MXR4000+Gas+App Data Monitor

maXpeedingrods MXR4000

maXpeedingrods 4000 Watt Inverter Generator Instruction Manual

Model: MXR4000

Brand: maXpeedingrods



Image: The maXpeedingrods MXR4000 Inverter Generator, a red and white portable unit with a control panel and handle.

PRODUCT OVERVIEW

The maXpeedingrods MXR4000 Inverter Generator is a portable, gas-powered unit designed for versatile power supply. It features a 4000 peak watt and 3200 running watt output, making it suitable for sensitive electronics and various applications such as camping, RV travel, home backup, and outdoor events. This generator incorporates advanced features like Bluetooth app remote data monitoring and a CO alarm for enhanced safety and convenience.



Image: The MXR4000 generator operating quietly next to a car, illustrating its low noise level (58-60 dB).

Ultra Lightweight and Portable

You can take it anywhere you want



Image: Two individuals demonstrating the portability of the MXR4000 generator; one carrying it by hand, the other with it stored in a car trunk.

SETUP AND FIRST USE

Unpacking and Accessories

Carefully remove the generator and all accessories from the carton. Ensure all included components are present:

- Owner Manual
- Generator Parallel Cables
- Quick Operation Guide
- Caution Label
- Generator Dust Cover
- Screwdriver
- Oil Funnel

- Spark Plug Socket Wrench
- L5-30P to TT-30R Adapter
- Two US Plugs

Accessories



Dust Cover *1



Owner Manual *1



Spark Plug Socket Wrench *1



Screwdriver *1



Oil Funnel *1



L5-30P to TT-30R Adapter *1



US Plug *2



Parallel Cables *1

Image: A collection of accessories including the owner's manual, parallel cables, quick guide, caution label, dust cover, screwdriver, oil funnel, spark plug wrench, L5-30P to TT-30R adapter, and two US plugs.

Adding Engine Oil

Before starting the generator for the first time, engine oil must be added. Use the provided oil funnel to add approximately 0.12 gallons of SAE 10W-30 engine oil. Ensure the oil level is at the correct position on the dipstick. Insufficient oil may prevent the generator from starting.

Your browser does not support the video tag.

Video: Demonstrates how to add engine oil to the generator using the provided funnel and checking the dipstick for the correct oil level.

Adding Gasoline

Add E10 gasoline to the fuel tank. The fuel tank capacity is 1.05 gallons. Do not fill the gasoline level higher than the red

ring inside the tank to allow for expansion.

OPERATING INSTRUCTIONS

Control Panel Overview

The generator features a comprehensive digital display center and multiple output ports:



Image: A detailed view of the generator's control panel, highlighting the digital display, various outlets, and indicator lights.

- **Digital Display Center:** Shows power output, fuel level, voltage, frequency, single running time, and accumulated running time.
- **CO Alert:** Indicates carbon monoxide detection.
- **Power/Low Oil/Bluetooth Indicators:** Lights for power status, low oil warning, and Bluetooth connection.
- **USB Ports:** USB-A and USB-C for charging devices.
- **AC 120V 30A Outlet:** NEMA L5-30R RV outlet.
- **AC 120V 20A Outlets:** Standard household plugs.

- **Circuit Breaker:** 20A breaker for overload protection.
- **Engine Start/Stop Button:** For electric starting.
- **Main Switch:** On/Off power switch.
- **ECO Mode:** For optimal fuel efficiency.
- **Parallel Ports:** For connecting two generators for increased power.

Starting the Generator

1. Turn the fuel switch to the "CHOKE" position.
2. Ensure the LOW IDLE mode is OFF (no green light). This ensures full power for starting.
3. Firmly grasp and pull the recoil handle until you feel increased resistance, then pull rapidly to start the engine. Alternatively, use the electric start button or the mobile app.
4. After the engine starts, turn the engine/fuel switch to the "RUN" position.

Your browser does not support the video tag.

Video: Demonstrates the manual starting procedure of the MXR4000 generator, including setting the choke and pulling the recoil handle.

Bluetooth App Data Monitoring

The MXR4000 features Bluetooth connectivity, allowing you to monitor and control the generator via a smartphone app. The app provides real-time data on power output, fuel level, voltage, frequency, and running times. You can also switch ECO mode on/off directly from the app.

Bluetooth® App Data Monitoring

MXR App tracks real-time data



Image: A smartphone screen showing the maXpeedingrods app, which displays real-time data such as power output, fuel level, voltage, and frequency for the connected generator.

Your browser does not support the video tag.

Video: Shows the maXpeedingrods app in action, demonstrating how to view generator data and control settings like ECO mode from a smartphone.

RV and Electric Car Charging

The generator is RV-ready with an NEMA L5-30R RV outlet and an adapter, simplifying the charging process for recreational vehicles. It can also be used for emergency electric car charging (a battery charger is required for charging the vehicle battery).



Image: The maXpeedingrods MXR4000 generator is shown connected to an RV, illustrating its RV charging capability.

Your browser does not support the video tag.


Video: A short clip demonstrating the maXpeedingrods MXR4000 generator being used to charge an electric car.

Power Output

The MXR4000 provides 4000 starting watts and 3200 running watts when using gasoline. For propane, it offers 3600 starting watts and 3000 running watts. It is designed to power high-rated and sensitive electrical appliances.

Home Power Source

Power multiple high-power and sensitive appliances simultaneously

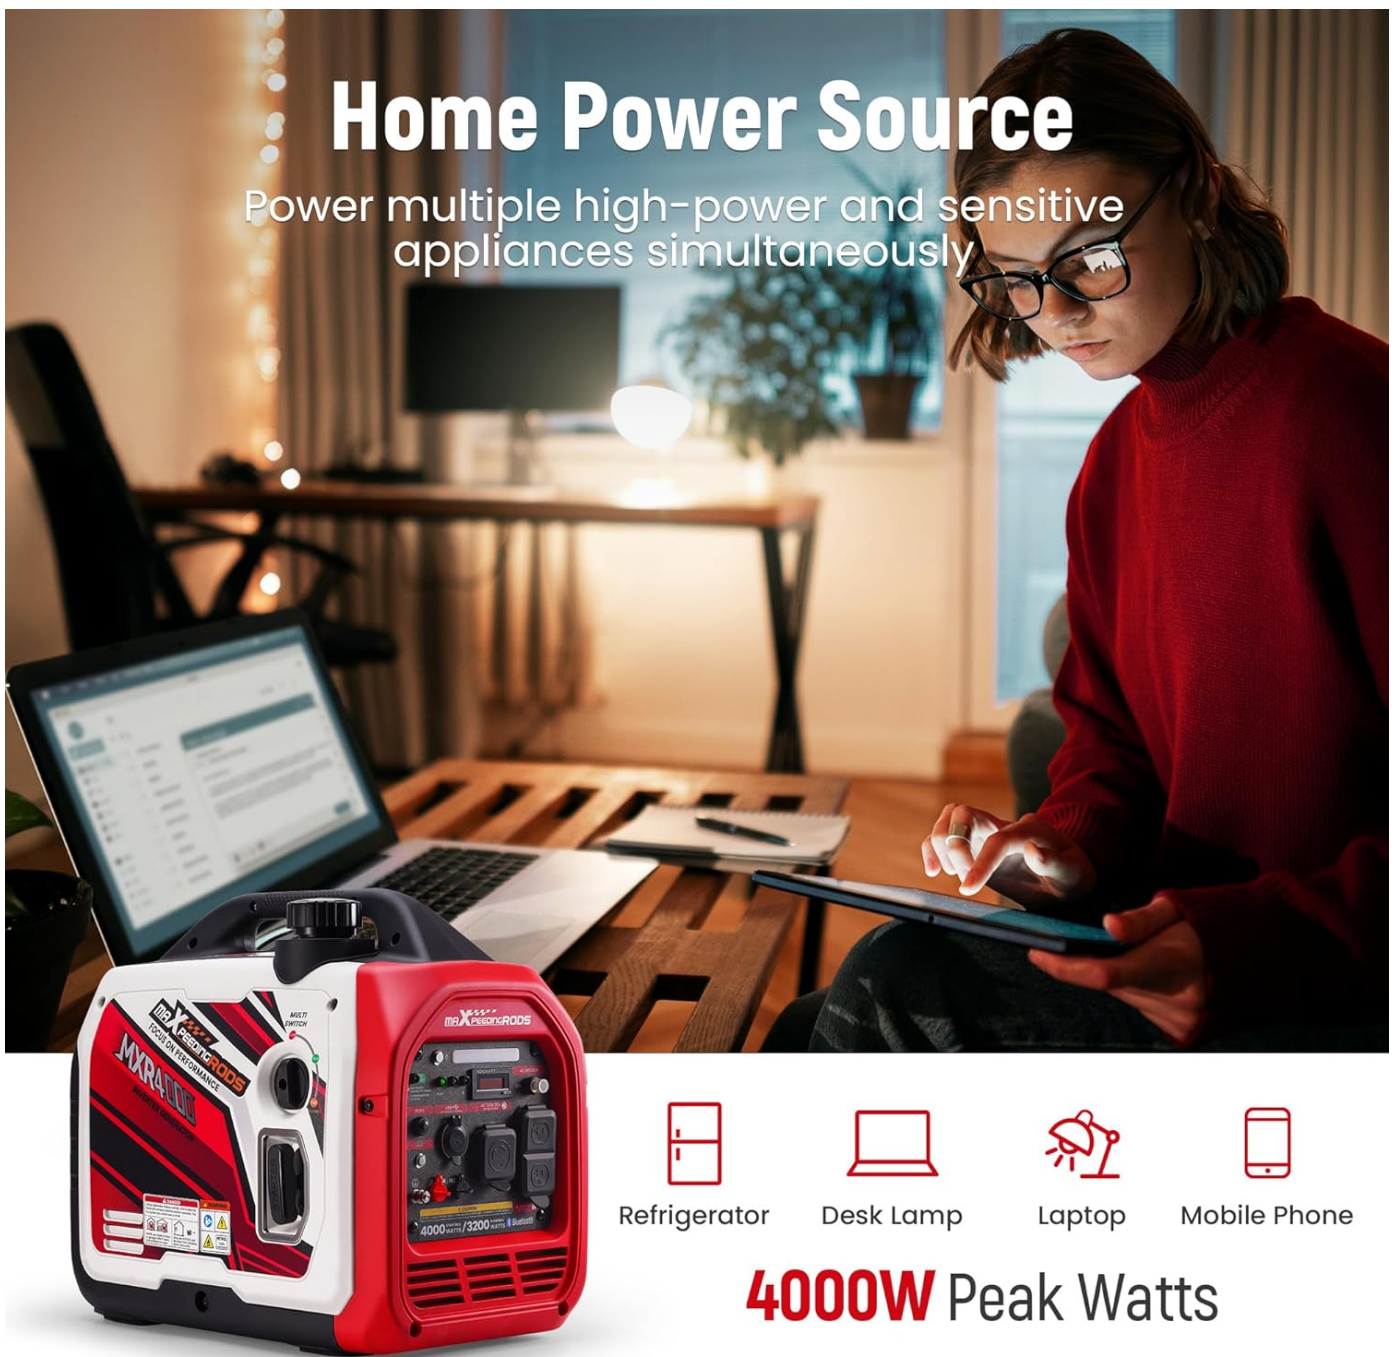

Refrigerator Desk Lamp Laptop Mobile Phone

4000W Peak Watts

Image: The MXR4000 generator shown powering a refrigerator, desk lamp, laptop, and mobile phone, indicating its versatility as a home power source.

MAINTENANCE

Regular maintenance is crucial for the longevity and optimal performance of your generator. Refer to the comprehensive owner's manual for detailed maintenance schedules and procedures.

- **Oil Changes:** Recommended after the first 20 hours of use or the first month, then periodically as per the manual.
- **Spark Plug:** Inspect and clean or replace the spark plug as recommended.
- **Air Filter:** Regularly check and clean the air filter.
- **Storage:** When storing the generator for extended periods, ensure the fuel system is drained or stabilized to prevent carburetor issues.

For detailed instructions, please refer to the [Instructions for Use \(IFU\) PDF](#).

TROUBLESHOOTING

If you encounter issues with your generator, consult the troubleshooting section in the owner's manual. Common issues may include:

- **Generator not starting:** Check fuel level, oil level, spark plug, and ensure all switches are in the correct position.
- **No power output:** Check circuit breaker, ensure generator is running correctly, and verify connections.
- **CO Alert:** If the CO Alert light is on, move the generator to an open outdoor area immediately. Do not run the generator in an enclosed area. Seek medical help if feeling sick, dizzy, or weak.

For more complex issues, contact maXpeedingrods customer support.

PRODUCT SPECIFICATIONS

Feature	Detail
Brand	maXpeedingrods
Model Name	MXR4000
Wattage (Gasoline)	4000 Peak Watts / 3200 Running Watts
Wattage (Propane)	3600 Starting Watts / 3000 Running Watts
Fuel Type	Gas / Propane
Item Weight	48.5 Pounds
Product Dimensions	19"L x 12"W x 17.3"H
Voltage	120 Volts
Frequency	60 Hz
Engine Type	4 Stroke
Engine Displacement	145 Cubic Centimeters
Tank Volume	4 Liters
Special Features	Portable, App Remote Data Monitor, RV Charging, Quiet, Multifunctional Digital Display

WARRANTY AND SUPPORT

maXpeedingrods warrants all inverter generators against defects in workmanship under normal use for a period of 2 years from the date of retail purchase by the original end-user purchaser ("Warranty Period").

Free lifetime technical assistance and customer care are provided.

For further assistance, please refer to the [Instructions for Use \(IFU\) PDF](#) or the [Certificate of Compliance \(PDF\)](#).

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question