

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [SEM](#) /

› [SEM Products 15093 Light Buckskin Color Coat - 12 oz. User Manual](#)

SEM 15093

SEM Products 15093 Light Buckskin Color Coat User Manual

Model: 15093 | Brand: SEM

PRODUCT OVERVIEW

SEM Color Coat is a specialized elastomeric coating designed to restore or change the color of most vinyl surfaces, flexible and rigid plastics, carpet, and velour. This product is not a dye; it is a fade-resistant, flexible, and permanent coating.

It is formulated to provide a durable finish that integrates with the material, offering a renewed appearance without cracking or peeling when properly applied.



Front view of the SEM Color Coat Light Buckskin aerosol can.

PREPARATION AND SETUP

Proper surface preparation is crucial for optimal adhesion and durability of SEM Color Coat. Follow these steps carefully:

Surface Cleaning:

- **For Vinyl:** Use SEM Soap (Part No. 39362) followed by Vinyl Prep (Part No. 38343) or Zero VOC Surface Cleaner (Part No. 40404).
- **For Plastic:** Apply an appropriate adhesion promoter. Do not use more than one product on the same job. Recommended products include Plastic Adhesion Promoter (Part No. 38363) or XXX Adhesion Promoter (Part No. 7723).

Ensure the surface is clean, dry, and free of any contaminants like grease, oil, or silicone before application.




Back of the can detailing preparation steps for vinyl and plastic surfaces.

OPERATING INSTRUCTIONS (APPLICATION)

Once the surface is prepared, proceed with the application of SEM Color Coat:

1. **Shake Can:** Shake the aerosol can thoroughly for at least one minute after the mixing ball begins to rattle. Continue shaking periodically during application.
2. **Application Distance:** Hold the can approximately 6-8 inches (15-20 cm) from the surface to be coated.
3. **Apply Light Coats:** Apply multiple light, even coats. Avoid applying heavy coats to prevent runs or uneven coverage.
4. **Drying Time Between Coats:** Allow 5-10 minutes of drying time between each coat. Apply additional coats until the desired hiding and color depth are achieved.

For detailed information, refer to the RAP-1 or Technical Data Sheet available from SEM Products.

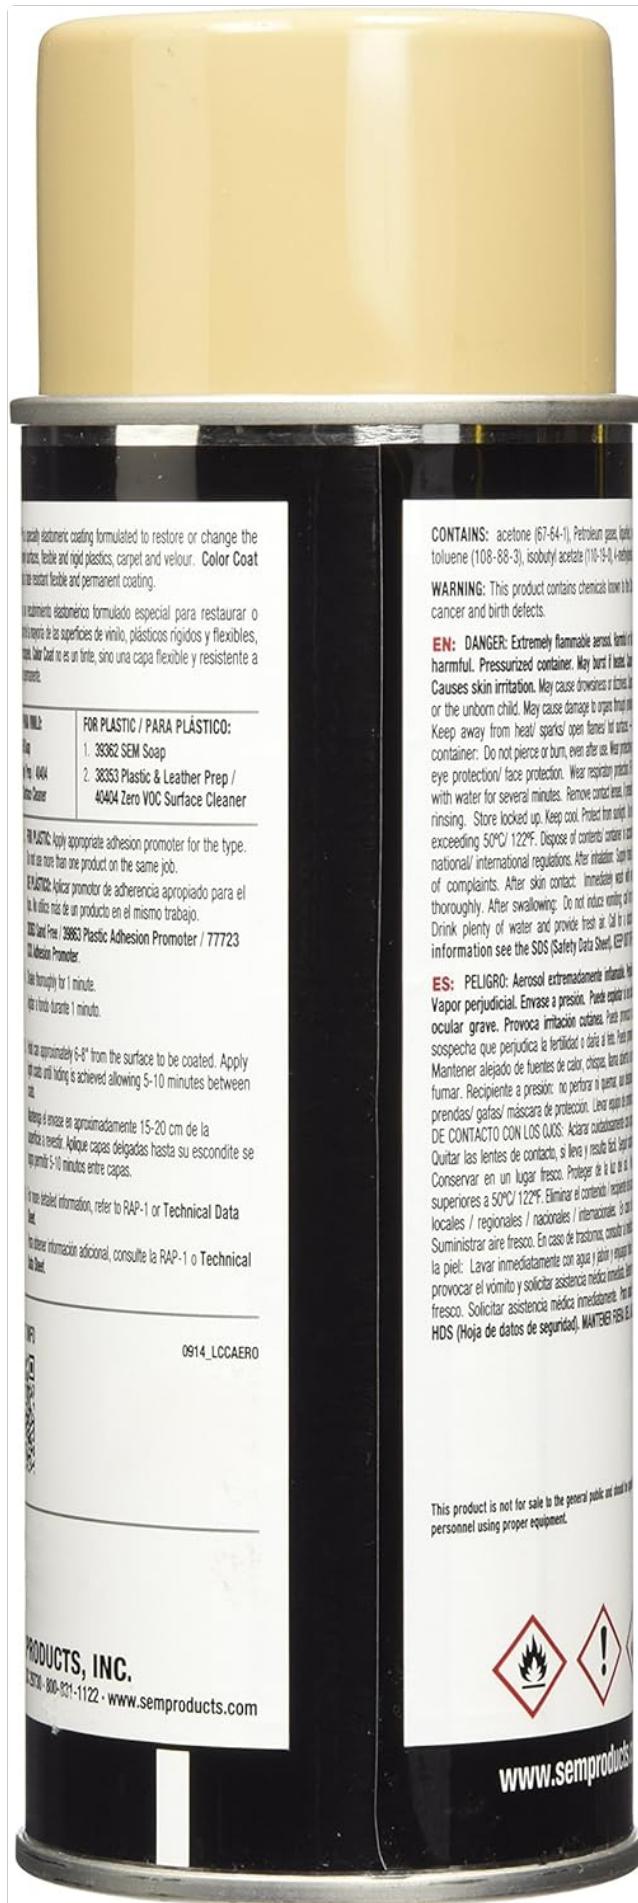

Side of the can illustrating application instructions and drying times.

Maintenance

Once applied and fully cured, SEM Color Coat is a durable and fade-resistant finish. To maintain its appearance, clean the coated surface with mild soap and water. Avoid harsh abrasives or strong chemical cleaners, as these may damage the coating.

Troubleshooting

Most application issues can be prevented by following the preparation and application instructions carefully. If issues arise:

- **Poor Adhesion:** Often caused by inadequate surface cleaning or improper use of adhesion promoter. Ensure surfaces are thoroughly cleaned and prepped as per instructions.
- **Uneven Finish/Runs:** Typically results from applying coats too heavily or not allowing sufficient drying time between coats. Apply lighter, multiple coats.
- **Color Mismatch:** Ensure the correct product color was selected for the intended application.

For persistent issues, consult the SEM Products technical data sheet or contact customer support.

Specifications

| Feature | Detail |
|--------------------------|------------------------|
| Manufacturer | SEM Products |
| Brand | SEM |
| Model | Modern |
| Item Model Number | 15093 |
| Manufacturer Part Number | LM1 |
| Item Weight | 15.8 ounces |
| Package Dimensions | 7.5 x 2.5 x 1.6 inches |
| Special Features | Fade Resistant |
| ASIN | B00PH6LG50 |
| Date First Available | November 11, 2014 |

SAFETY INFORMATION

DANGER: EXTREMELY FLAMMABLE AEROSOL. PRESSURIZED CONTAINER. MAY BURST IF HEATED. HARMFUL OR FATAL IF SWALLOWED. VAPOUR HARMFUL. CAUSES SERIOUS EYE IRRITATION. CAUSES SKIN IRRITATION.

Read all cautions on the back panel and product safety data sheet before use.

General Precautions:

- Keep away from heat, sparks, open flames, and hot surfaces. No smoking.
- Pressurized container: Do not pierce or burn, even after use.
- Wear protective gloves, protective clothing, eye protection, and face protection.
- Wash thoroughly after handling.
- Store locked up. Keep cool. Protect from sunlight. Do not expose to temperatures exceeding 50°C (122°F).
- Dispose of contents/container in accordance with local, regional, national, and international regulations.

First Aid:

- **IF IN EYES:** Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
- **IF INHALED:** Supply fresh air. Consult a doctor if case of complaints.
- **IF ON SKIN:** Wash with water and soap and rinse thoroughly.
- **IF SWALLOWED:** Do NOT induce vomiting. Consult a doctor immediately.

WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects.

For more detailed information, refer to the Safety Data Sheet (SDS) for this product.



Side of the can displaying comprehensive safety warnings and precautions.

SUPPORT INFORMATION

For further assistance, technical data sheets, or product inquiries, please contact SEM Products, Inc.:

SEM PRODUCTS, INC.

Rock Hill, SC 29730

Phone: 800-831-1122

Visit the official website for more information on Color Coat aerosols:www.semproducts.com/color-coat-aerosols/

© 2023 SEM Products, Inc. All rights reserved.