

Steinel GL 60 S

Steinel GL 60 S Stainless Steel Garden Luminaire

MODEL: GL 60 S (007881) - USER MANUAL

1. Introduction

This manual provides detailed instructions for the safe installation, operation, and maintenance of your Steinel GL 60 S Garden Luminaire. Please read these instructions carefully before beginning installation or use, and retain them for future reference.

The Steinel GL 60 S is a modern, straight-lined outdoor luminaire designed to enhance gardens, driveways, and pathways. It features a 360° motion detector and an integrated LED bulb, providing both functionality and aesthetic appeal.



2. Safety Instructions

Warning: Installation must be carried out by a qualified electrician in accordance with national wiring regulations and local electrical codes.

- Always disconnect the power supply before performing any work on the luminaire.
- Ensure the luminaire is securely mounted to prevent accidental dislodgement.
- Do not modify the product in any way. Unauthorized modifications may compromise safety and void the warranty.
- This product is designed for outdoor use only.
- Protect the electrical connections from moisture.
- Keep packaging materials away from children.

3. Package Contents

Verify that all components are present before beginning installation:

- Steinel GL 60 S Garden Luminaire
- E27 LED Bulb (9.78W, 3000K)
- Mounting Material:
 - 3x Screws
 - 3x Anchors
 - 3x M6 Headless Screws
- Sensor Covers
- User Manual

4. Setup and Installation

The Steinel GL 60 S luminaire is designed for surface mounting in outdoor environments.

1. **Preparation:** Ensure the power supply to the installation area is switched off at the main circuit breaker.
2. **Mounting Location:** Choose a stable, level surface for installation. The luminaire has an IP44 rating, making it suitable for outdoor use and protected against splashing water.
3. **Base Installation:** Secure the luminaire base to the chosen surface using the provided screws and anchors. Refer to the dimension diagram for precise measurements and mounting points.
4. **Wiring:** Connect the electrical wires according to the wiring diagram in the full instruction manual (not provided here). Ensure all connections are secure and properly insulated.
5. **Luminaire Assembly:** Attach the main body of the luminaire to the base. The stainless steel tube can be shortened if a lower height is desired (consult a professional for this modification).
6. **Bulb Installation:** Carefully screw the E27 LED bulb into the lamp holder.
7. **Sensor Adjustment:** Once installed, the sensor's detection range (up to 12m) and twilight threshold (2 - 2000 lx) can be adjusted. Use the provided sensor covers if specific detection zones need to be masked.
8. **Power On:** Restore power to the circuit and test the luminaire's functionality.



Figure 2: The GL 60 S luminaire seamlessly integrated into a modern garden landscape.



Figure 3: Technical drawing showing the dimensions of the Steinel GL 60 S luminaire, including height and base measurements.

5. Operating Instructions

The GL 60 S luminaire offers several operational features for customized lighting:

- **Motion Detection:** The integrated 360° infrared sensor reliably detects movement within a range of up to 12 meters.
- **Soft Light Start:** Upon detection, the light gradually brightens, providing a gentle and comfortable illumination transition.
- **Adjustable Lighting Duration:** The illumination time after detection can be set continuously from 5 seconds to 15 minutes.
- **Adjustable Twilight Threshold:** The sensor's sensitivity to ambient light can be adjusted from 2 to 2000 lux, determining when the motion sensor becomes active.
- **Night Light Function:** A continuous low-level illumination can be set between 0% and 50% brightness, providing constant ambient light.
- **4-Hour Continuous Light:** An optional feature allows the luminaire to stay on continuously for 4 hours,

overriding the motion sensor. This is typically activated via a wall switch (not included).



Figure 4: The GL 60 S providing clear illumination along a garden path during nighttime.

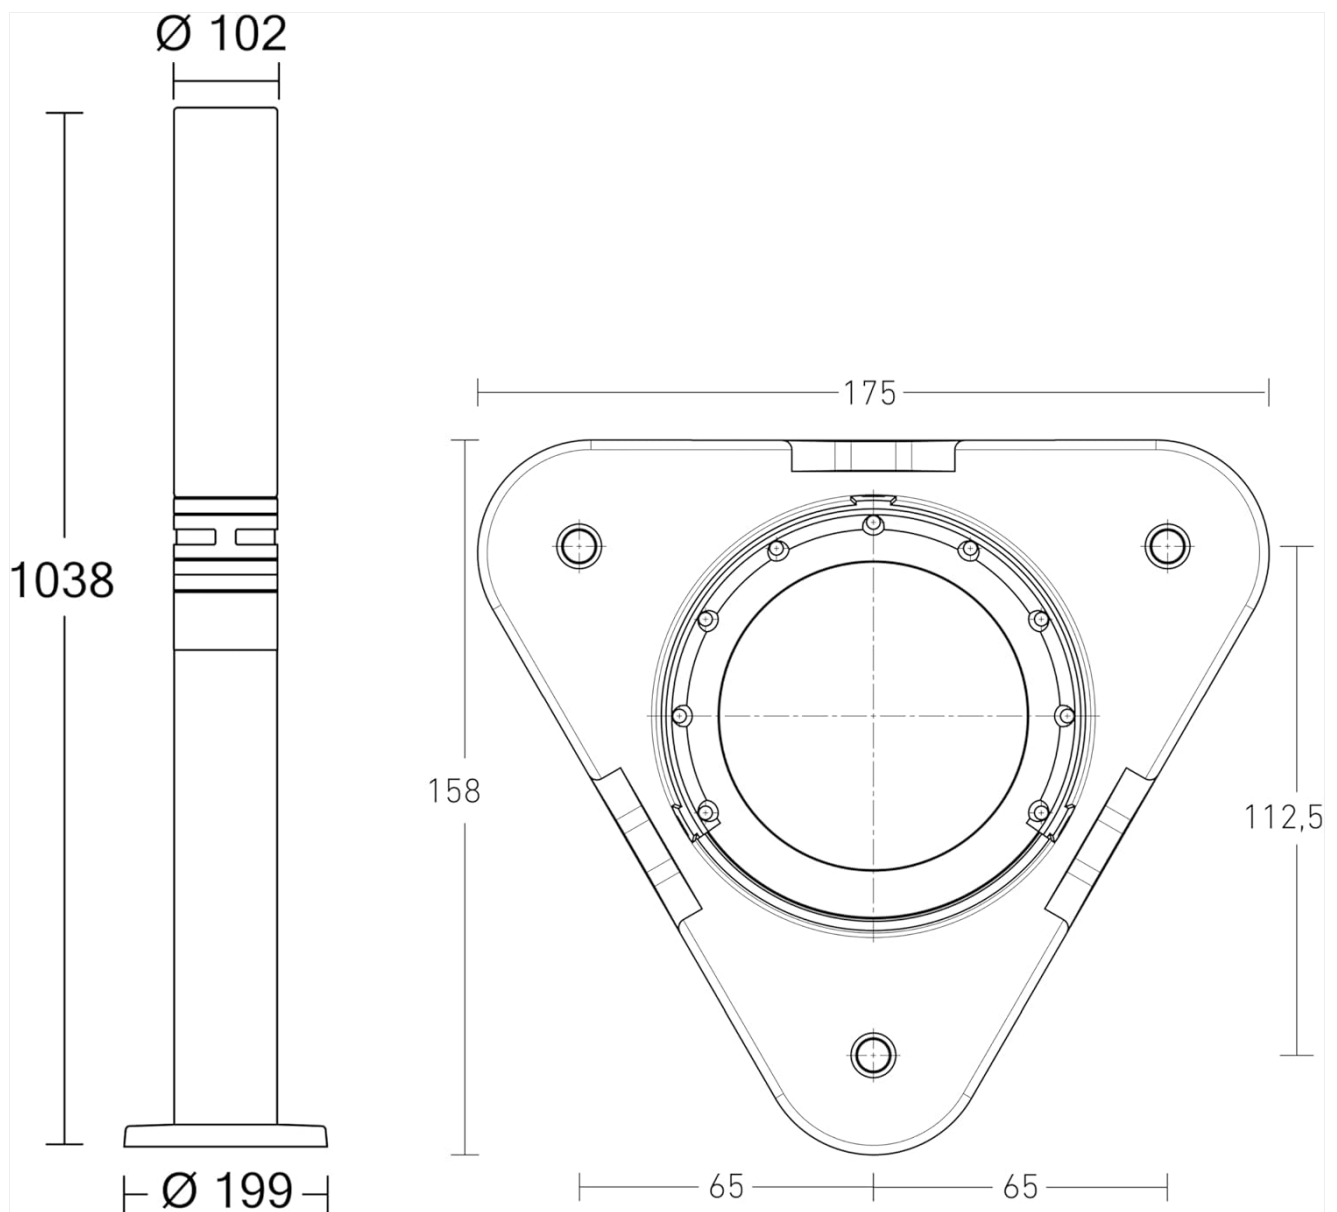


Figure 5: Visual representation of the 4-hour continuous light function, useful for extended illumination periods.

6. Maintenance

Regular maintenance ensures the longevity and optimal performance of your luminaire.

- **Cleaning:** Clean the luminaire regularly with a soft, damp cloth. Do not use abrasive cleaners or solvents, as these can damage the stainless steel finish and opal glass.
- **Bulb Replacement:** The luminaire uses a standard E27 LED bulb. To replace the bulb:
 - a. Disconnect power to the luminaire at the main circuit breaker.
 - b. Carefully remove the opal glass cover.
 - c. Unscrew the old E27 bulb and screw in the new one.
 - d. Reattach the opal glass cover securely.
 - e. Restore power and test.
- **Inspection:** Periodically inspect the luminaire for any signs of damage, loose connections, or wear. Address any issues promptly.



Figure 6: A close-up view of the E27 LED bulb, indicating the type of bulb used in the luminaire.

7. Troubleshooting

If you experience issues with your Steinel GL 60 S luminaire, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Light does not turn on.	No power supply, faulty bulb, incorrect sensor settings.	Check power connection, replace bulb, adjust twilight threshold and detection range.
Light stays on continuously.	Continuous light function activated, sensor constantly triggered, faulty sensor.	Deactivate 4-hour continuous light, check for constant movement in detection area, adjust sensor sensitivity.
Light turns on without apparent reason.	Sensor too sensitive, environmental factors (e.g., moving branches, small animals).	Reduce sensor sensitivity, use sensor covers to mask unwanted detection areas.
Detection range is too short/long.	Incorrect sensor range setting.	Adjust the sensor's detection range setting.

8. Specifications

Brand	Steinel
Model Number	GL60 LED (007881)

Product Dimensions (L x W x H)	103.81 x 10.21 x 22 cm; 3.9 Kilograms
Ingress Protection (IP) Rating	IP44
Style	Floor Lamp / Bollard
Color	Silver
Material	Stainless Steel, Glass
Finish Type	Stainless Steel Finish
Number of Bulbs	1
Maximum Wattage	9.78 Watts
Voltage	230 Volts
Specific Uses	Outdoor use only
Special Features	Motion Detector
Shade Color	Warm White
Shade Material	Stainless Steel
Light Angle	LED
Plug Type	AC
Switch Style	Dimmer
Batteries Included/Required	No
Bulb Type	LED
Luminous Flux	812 lm
Power	9.78 Watts
Features	Built-in Timer
Color Rendering Index (CRI)	89
Average Lifespan	25000 Hours
Item Weight	3.9 Kilograms
Country of Origin	Romania


9. Warranty and Support

Steinel products are known for their quality and durability. This luminaire is constructed from high-quality materials like stainless steel and opal glass, ensuring a long service life and protection against splashing water (IP44). For warranty information or technical support, please refer to the official Steinel website or contact their customer service directly.

You can visit the [Steinel Brand Store](#) for more products and information.

Related Documents - GL 60 S


	STEINEL L 20 S, L 22 S, L 22, L 22 N Outdoor Motion Sensor Light Installation and Operation Manual Comprehensive guide for STEINEL L 20 S, L 22 S, L 22, and L 22 N outdoor wall lights with motion sensors. Covers installation, operation, settings, troubleshooting, and warranty information.
	Steinel XLED CAM 1 SC User Manual and Installation Guide Comprehensive guide for the Steinel XLED CAM 1 SC sensor-switched LED floodlight, covering installation, configuration, usage, and troubleshooting. Learn about its features, technical specifications, and how to operate it via the Steinel CAM App.
	Steinel CAM App Installationsanleitung Eine detaillierte Installationsanleitung für die Steinel CAM-App, die Schritt für Schritt erklärt, wie Sie Ihre Steinel CAM-Sicherheitskamera einrichten, mit Ihrem WLAN verbinden und bedienen. Enthält Anleitungen zur Montage, App-Einrichtung und Fehlerbehebung.
	STEINEL RS LED M1: Montage- und Bedienungsanleitung Umfassende Anleitung für die STEINEL RS LED M1 Innenleuchte mit Bewegungsmelder, die Installation, Bedienung, technische Daten und Fehlerbehebung abdeckt.
	STEINEL CONNECT APP: Update Guide for Bluetooth Mesh Products Step-by-step guide to updating your STEINEL Connect products to the new Bluetooth Mesh standard using the STEINEL Connect App. Learn how to perform firmware updates and set up devices in your network.

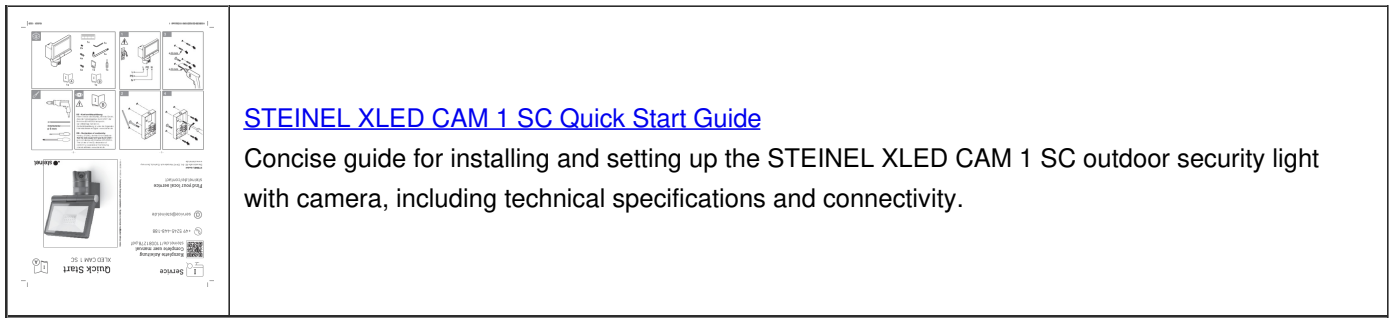

[STEINEL XLED CAM 1 SC Quick Start Guide](#)

Concise guide for installing and setting up the STEINEL XLED CAM 1 SC outdoor security light with camera, including technical specifications and connectivity.

Documents - Steinel – GL 60 S

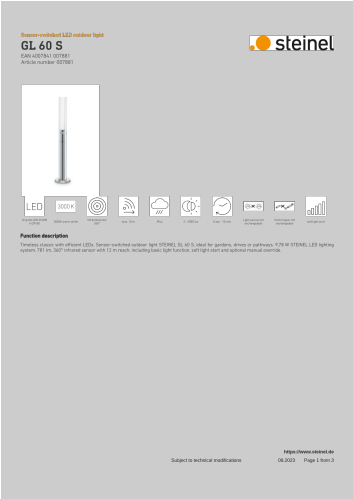


[\[pdf\]](#) User Manual Specifications Warranty

Vertriebsdatenblatt V2 DIY process Intellihub Function description Timeless classic with efficient LEDs
Sensor switched outdoor light STEINEL GL 60 S ideal for gardens drives or pathways 9 78 W LED
lighting system 781 lm 360° infrared sensor 12 m reach including basic function soft start and optional
manual override DATEN EN 007881 1 intellihub sg 2023 |||

Sensor-switched LED outdoor light **GL 60 S** EAN 4007841 007881 Article number
007881 long life LED 25.000 h CRI 80 3000K warm-white infrared sensor 360 max. 10
m IP44 2 - 2000 lux 5 sec - 15 min Light source not exchangeable Control gear not
exchangeable soft light start Function descriptio...


lang:en **score:25** filesize: 548.68 K page_count: 3 document date: 2023-08-12

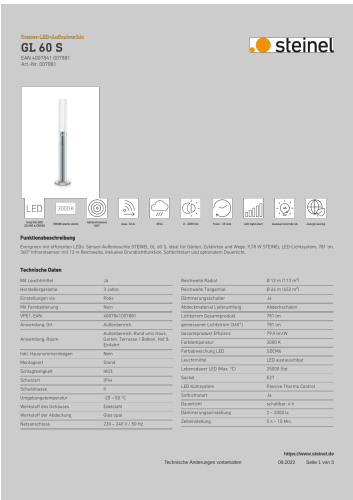

[\[pdf\]](#) User Manual Datasheet

Vertriebsdatenblatt V2 DIY admin Datenblatt herunterladen Außenleuchten mit Bewegungsmelder
STEINEL GL 60 S 169513 4007841007881 LED AUSSENLEUCHTE steinel de out media datasheet |||
Sensor-LED-Auenleuchte **GL 60 S** EAN 4007841 007881 Art.-Nr. 007881 long life
LED 25.000 h CRI 80 3000K warm-white infrared sensor 360 max. 12 m IP44 2 - 2000
lux 5 sec - 15 min soft light start manual override 4h energy saving
Funktionsbeschreibung Evergreen mit effizienten LEDs. Sensor-Au...



lang:de **score:24** filesize: 554.68 K page_count: 3 document date: 2022-09-21

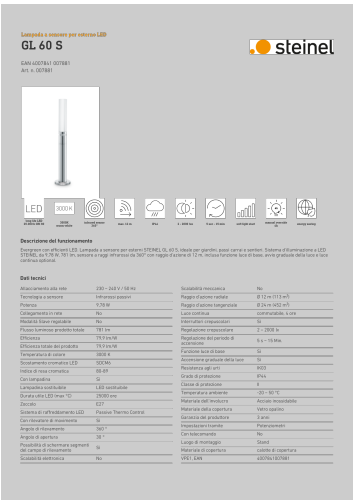

[\[pdf\]](#) User Manual Datasheet

process Scarica la scheda tecnica STEINEL Lampade giardino GL 60 S 170339 Foglio dati
4007841007881 LED OUTDOOR SENSORLIGHT steinel it out media datasheet |||
Lampada a sensore per esterno LED **GL 60 S** EAN 4007841 007881 Art. n. 007881
long life LED 25.000 h CRI 80 3000K warm-white infrared sensor 360 max. 12 m IP44
2 - 2000 lux 5 sec - 15 min soft light start manual override 4h energy saving
Descrizione del funzionamento Evergreen con efficient...

lang:it **score:24** filesize: 688.21 K page_count: 2 document date: 2022-07-08

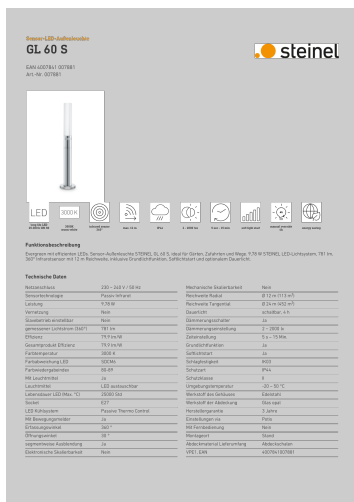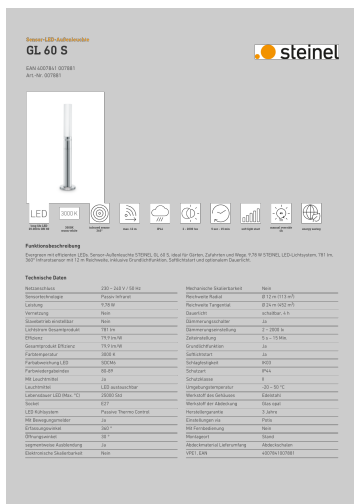

process Datenblatt Steinel Außenleuchte GL 60 S silber mit Sensor 4007841007881 edelstahl tuerklingel
de mediafiles Sonstiges |||

LED 25.000 h CRI 80 3000K warm-white infrared sensor 360 max. 12 m IP44 2 - 2000
lux 5 sec - 15 min soft light start manual override 4h energy saving
Funktionsbeschreibung Evergreen mit effizienten LEDs. Sensor-Au...



Vertriebsdatenblatt V2 DIY process Descargar ficha de datos Luminarias exterior GL 60 S STEINEL

Lmpara LED de exterior con sensor **GL 60 S** EAN 4007841 007881 N de art. 007881
long life LED 25.000 h CRI 80 3000K warm-white infrared sensor 360 max. 10 m IP44
2 - 2000 lux 5 sec - 15 min Light source replaceable by end user Control gear not
exchangeable soft light start Descripcin del fu...



process Sensor LED Außenleuchte GL 60 S 01 2022 Seite 1 von 2 long life 25 000 h CRI 80 3000K warm
white infrared sensor 360° max 12 m IP44 2000 lux 5 sec 15 min soft light start manual override 4h
energy saving Funktionsbeschreibung Evergreen mit effizienten LEDs STEINEL ideal für Gärten
Zufahrten und Wege 9 78 W Lichtsystem 91voLjd7SiL media amazon images I |||

LED 25.000 h CRI 80 3000K warm-white infrared sensor 360 max. 12 m IP44 2 - 2000
lux 5 sec - 15 min soft light start manual override 4h energy saving
Funktionsbeschreibung Evergreen mit effizienten LEDs. Sensor-Au...




[pdf] User Manual Documentation

Download starten Außenleuchten mit Bewegungsmelder STEINEL GL 60 S 182780 110089961 QS EU

Druck steinel.de out media quickstart |||

110089961 03/2022_A Technische nderungen vorbehalten. / Subject to technical modification without notice. I Service Komplette Anleitung Complete user manual steinel.de/110081290.pdf 49 5245-448-188 service steinel.de Quick Start I **GL 60 S A** Find your local service steinel.de/contact STEINEL Ve...

lang:de score:23 filesize: 1.02 M page_count: 2 document date: 2022-03-16

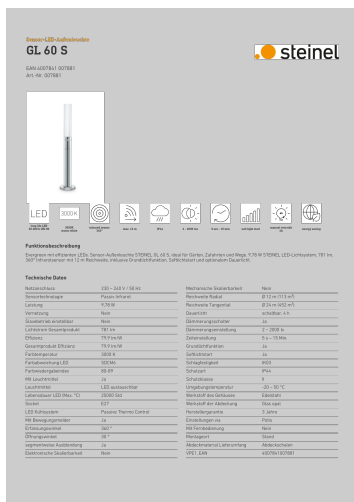


[pdf] User Manual

process Datenblatt 20 204007841007881 20LED 20AUSSENLEUCHTE 20GL 2060 20S Steinel LED

outdoor luminaire GL 60 S watt24 media 40 8b 12 1646200302 |||

Sensor-LED-Auenleuchte **GL 60 S** EAN 4007841 007881 Art.-Nr. 007881 long life LED 25.000 h CRI 80 3000K warm-white infrared sensor 360 max. 12 m IP44 2 - 2000 lux 5 sec - 15 min soft light start manual override 4h energy saving Funktionsbeschreibung Evergreen mit effizienten LEDs. Sensor-Au... lang:de score:23 filesize: 688.04 K page_count: 2 document date: 2022-02-23

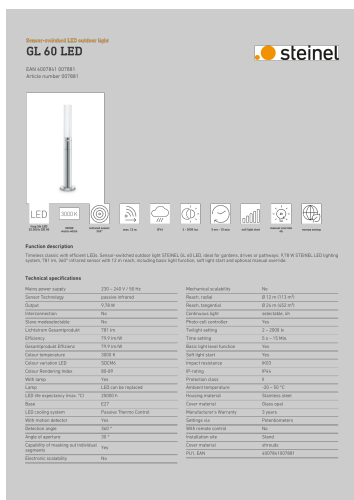


[pdf] User Manual Specifications

process Data 20sheet 20 204007841007881 20LED 20OUTDOOR 20SENSORLIGHT 20GL 2060 20S

Steinel LED outdoor luminaire GL 60 S watt24 media ab 43 c8 1646200303 |||

Sensor-switched LED outdoor light GL 60 LED EAN 4007841 007881 Article number 007881 long life LED ... r 007881 Accessories EAN 4007841 008321 EAN 4007841 001346 EAN 4007841 001339 LED linear lamp for **GL 60 S** Replacement glass shade for **GL 60 S** Replacement electronics unit for **GL 60 S** Detection Zone...

lang:en score:22 filesize: 688.08 K page_count: 2 document date: 2022-02-23

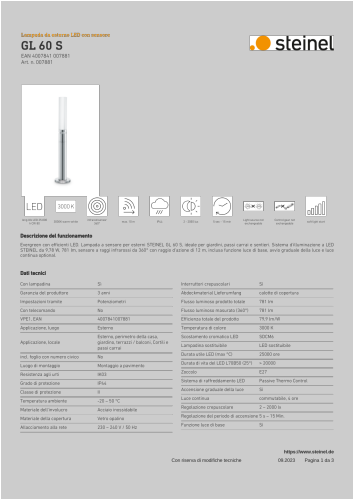

[pdf]


Vertriebsdatenblatt V2 DIY process 170339 Foglio dati 4007841007881 LED OUTDOOR SENSORLIGHT

GL 60 S STEINEL 7881 LAMP MT Distribuzione Srl 9a760b80280473959be46279fbc60cfb4de781fe

mtdistribuzione it media product 9 a 7 6 |||

Lampada da esterno LED con sensore **GL 60 S** EAN 4007841 007881 Art. n. 007881 long life LED 25.000 h CRI 80 3000K warm-white infrared sensor 360 max. 10 m IP44 2 - 2000 lux 5 sec - 15 min Light source not exchangeable Control gear not exchangeable soft light start Descrizione del funzionam...

lang:it **score:22** filesize: 551.82 K page_count: 3 document date: 2023-09-02

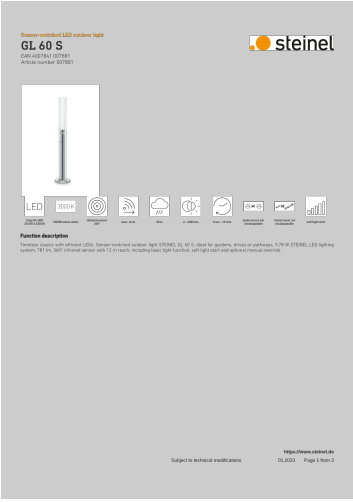

[pdf] User Manual Specifications Warranty


Vertriebsdatenblatt V2 DIY process Technical Information STEINEL SENSOR LIGHT GL 60 S 9 78W

3000K 781lm INOX Sensor Luminaires Onninen 21588683 kesko onninen pim resources production s3

eu west 1 amazonaws pimdocuments |||

Sensor-switched LED outdoor light **GL 60 S** EAN 4007841 007881 Article number 007881 long life LED 25.000 h CRI 80 3000K warm-white infrared sensor 360 max. 12 m IP44 2 - 2000 lux 5 sec - 15 min Light source not exchangeable Control gear not exchangeable soft light start Function descriptio...

lang:en **score:21** filesize: 550.93 K page_count: 3 document date: 2023-01-05

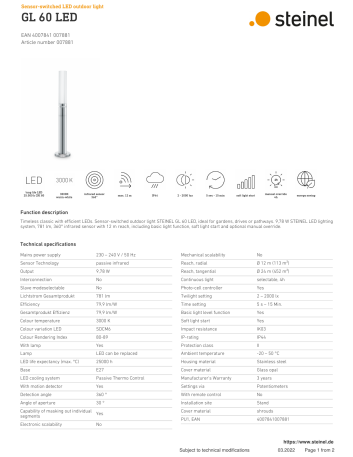

[pdf] User Manual Specifications

process STEINGL GL 60 LED outdoor lightSTEINGL light ManualLib Manual LibrarySTEINLE manuallib

2023 10 27 STEINLE |||


Sensor-switched LED outdoor light GL 60 LED EAN 4007841 007881 Article number 007881 long life LED ... r 007881 Accessories EAN 4007841 008321 EAN 4007841 001346 EAN 4007841 001339 LED linear lamp for **GL 60 S** Replacement glass shade for **GL 60 S** Replacement electronics unit for **GL 60 S** Detection Zone...

lang:en **score:21** filesize: 688.09 K page_count: 2 document date: 2022-03-11




[pdf] Datasheet

Edelstahl Sensor Aussenleuchte GL 60 S EAN nevalux AG Sensor STEINEL ideal für Gärten Zufahrten und Wege 9 78 W LED Lichtsystem 781 lm 360° Infrarotsensor mit 12 m Reichweite d 4007841007881nevalux swiss index print datasheet productid 41010 parentid 152634 lang de ||| GL 60 Edelstahl Sensor-Aussenleuchte **GL 60 S** EAN: 4007841 007881 E-Nummer: 924370079 Passiv-Infrarot-Technologie mit grossem Erfassungsbereich 360° Eleganter Softlicht-Start Hochwertiger Edelstahl Hochwertiges Opalglas 4 Stunden Dauerlicht optional Evergreen mit effizienten LEDs. Sensor-Aussenleuc... lang:de **score:21** filesize: 1.27 M page_count: 6 document date: 2025-09-13

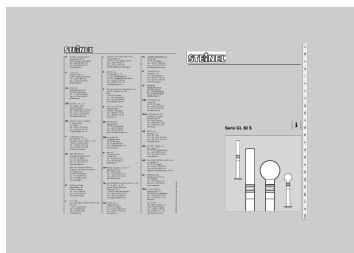


[pdf]

gl60s mul ds GL 60 S Steinel Лампы для наружного освещение west l ru td ||| D STEINEL-Schnell-Service Dieselstrae 80-84 33442 Herzebrock-Clarholz Tel: 49/5245/448-188 Fax: 49/ ... 7 28 58 Fax: 7/95/2 37 11 82 goncharov o-svet.ru 8039304 Technische nderungen vorbehalten. Serie **GL 60 S** i RUS LV LT EST HR SLO RO PL SK CZ H TR GR N FIN DK S P E I NL F GB ... lang:nl **score:20** filesize: 1.13 M page_count: 51 document date: 2007-10-26

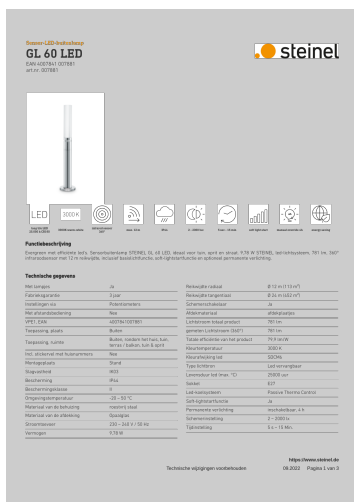




[pdf] User Manual Datasheet

Vertriebsdatenblatt V2 DIY admin Gegevensblad en Buitenlampen buitenlampen met bewegingsmelder STEINEL GL 60 LED 170340 4007841007881 OUTDOOR SENSORLIGHT S steinel de out media datasheet ||| Sensor-LED-buitenlamp GL 60 LED EAN 4007841 007881 art.nr. 007881 long life LED 25.000 h CRI 80 30 ... islichtfunctie procent, tot Index kleurweergave CRI Ja Nee 10 50 10 50 = 82 Led-staaf voor **GL 60 S** Reserveglas voor **GL 60 S** Elektronische reserve-eenheid voor **GL 60 S** Technische wijzigingen ... lang:nl **score:18** filesize: 553.49 K page_count: 3 document date: 2022-09-21

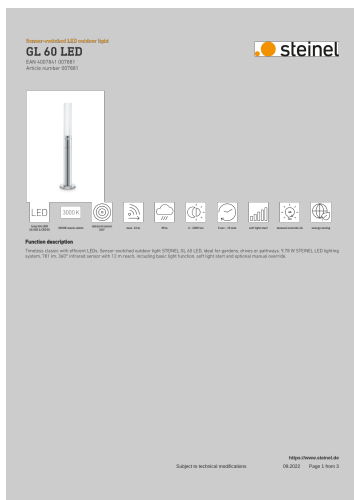

[pdf] User Manual Specifications Datasheet Warranty

Vertriebsdatenblatt V2 DIY admin Download datasheet Outdoor Lights with Motion Detector STEINEL GL 60 LED 170337 Data sheet 4007841007881 OUTDOOR SENSORLIGHT S steinel de out media ||| Sensor-switched LED outdoor light GL 60 LED EAN 4007841 007881 Article number 007881 long life LED ... RI = 82 Accessories EAN 4007841 008321 EAN 4007841 001346 EAN 4007841 001339 LED linear lamp for **GL 60 S** Replacement glass shade for **GL 60 S** Replacement electronics unit for **GL 60 S** Subject to tec... lang:en **score:18** filesize: 553.44 K page_count: 3 document date: 2022-09-21

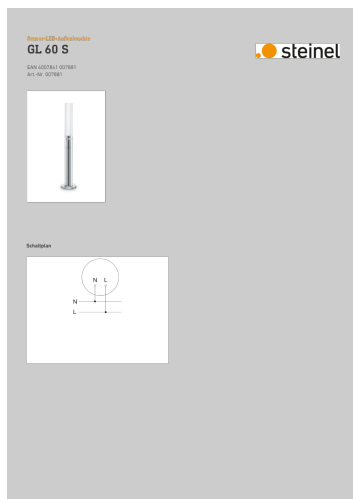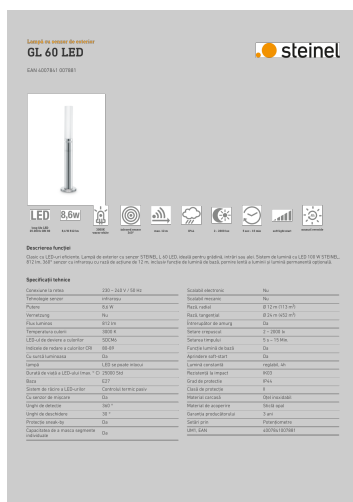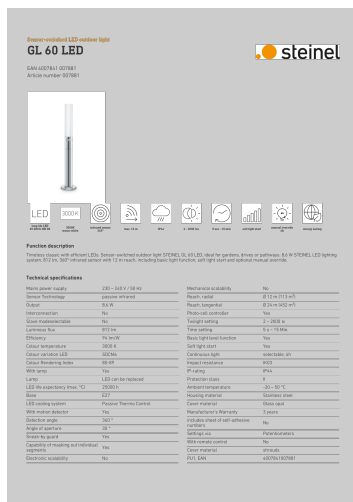

[\[pdf\]](#) User Manual Specifications Datasheet




[pdf] Datasheet

Vertriebsdatenblatt V2 DIY process Descargar ficha de datos Vidrios recambio Cristal para GL 60 S
STEINEL 247665 Ficha 4007841001346 SPARE PART GLASS GEWINDE steinel out media datasheet

|||

Pieza de recambio Cristal de recambio para **GL 60 S** EAN 4007841 001346 N de art. 001346 Descripcin del funcionamiento Sustitucin sencilla del cristal El cristal de recambio para la Impara de exterior con sensor de diseo **GL 60 S** con cierre roscado. Datos tcnicos Garanta de fabricante UE1, EAN 3 ao...

lang:fr **score:16** filesize: 353.47 K page_count: 1 document date: 2024-08-31

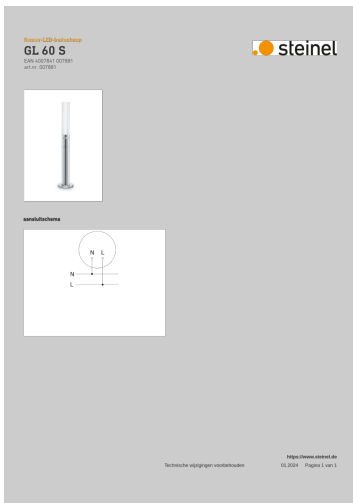

[pdf] Diagram

Schaltpläne process 197736 Schakelschema 4007841007881 LED OUTDOOR SENSORLIGHT GL 60 S
steinel de out media wiringdiagram |||

Sensor-LED-buitenlamp **GL 60 S** EAN 4007841 007881 art.nr. 007881
aansluitschema Technische wijzigingen voorbehouden https://www.steinell.de 01.2024
Pagina 1 van 1 ...

lang:fr **score:16** filesize: 398.1 K page_count: 1 document date: 2024-01-26



[pdf] Datasheet


Vertriebsdatenblatt V2 DIY admin Gegevensblad en LED staven Led staaf voor GL 60 S STEINEL
167836 4007841008321 LUMINOUS ROD WW E27 370MM EU steinel de out media datasheet |||
Toebehoren Led-staaf voor **GL 60 S** EAN 4007841 008321 art.nr. 008321 Light source not exchangeable Control gear not exchangeable Functiebeschrijving Snel geplaatst Snel geplaatst De led-staaf voor sensor-tuinlamp **GL 60 S** met 3000 K warm wit licht. Technische gegevens Afmetingen x H VPE1, EAN...

lang:nl **score:16** filesize: 392.11 K page_count: 1 document date: 2022-09-21




[pdf] Datasheet Accessories

process Scarica la scheda tecnica STEINEL Aste luminose Asta luminosa LED GL 60 S 167835 Foglio dati 4007841008321 LUMINOUS ROD WW E27 370MM EU steinel it out media datasheet ||| Accessori Asta luminosa LED **GL 60 S** EAN 4007841 008321 Art. n. 008321 Light source not exchangeable Control gear not exchangeable Descrizione del funzionamento Veloce da inserire L asta luminosa LED adatta per la lampada a sensore per giardini **GL 60 S** con luce di colore bianco caldo da 3.000 K. ... lang:it **score:16** filesize: 520.31 K page_count: 1 document date: 2022-06-02

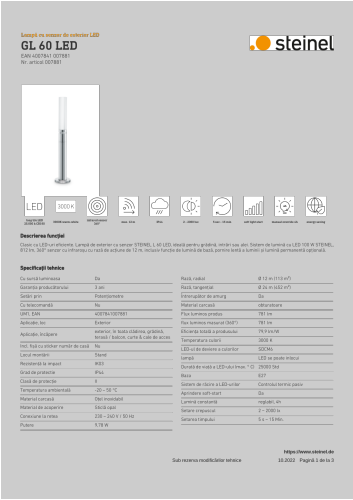

[pdf] User Manual

Vertriebsdatenblatt V2 DIY admin Stalp LED exterior Steinell GL60 Silver senzor miscare 9 8W 780lm 007881 SE00029 fisa tehnica etbm ro Attachment DownloadFile Id 32280 ||| Lamp cu senzor de exterior LED GL 60 LED EAN 4007841 007881 Nr. articol 007881 long life LED 25.000 ... , pn la 50 Indicele de redare a culorilor CRI = 82 Bec cu LED GL 60 LED Sticl de schimb pentru **GL 60 S** Unitate electronic de schimb **GL 60 S** Sub rezerva modificarilor tehnice https://www.steinell.... lang:es **score:16** filesize: 577.05 K page_count: 3 document date: 2022-10-24

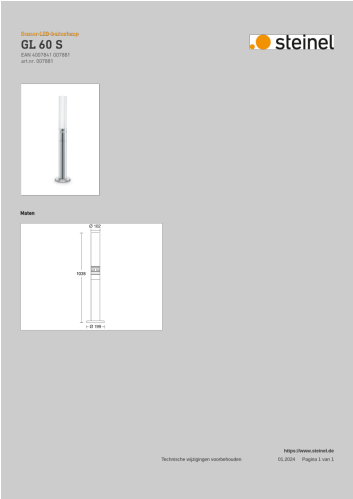

[pdf] Diagram

Technische Zeichnung process 201786 tekening 4007841007881 LED OUTDOOR SENSORLIGHT GL 60 S steinel de out media technicaldiagram ||| Sensor-LED-buitenlamp **GL 60 S** EAN 4007841 007881 art.nr. 007881 Maten Technische wijzigingen voorbehouden https://www.steinell.de 01.2024 Pagina 1 van 1 ... lang:es **score:16** filesize: 397.43 K page_count: 1 document date: 2024-01-26



[\[pdf\]](#) Specifications Datasheet Dimension Guide Accessories

Vertriebsdatenblatt V2 DIY admin Download datasheet Light sources LED linear lamp for GL 60 S


STEINEL 167833 Data sheet 4007841008321 LUMINOUS ROD WW E27 370MM EU steinel.de out media |||

Accessory LED linear lamp for **GL 60 S** EAN 4007841 008321 Article number 008321

Light source not exchangeable Control gear not exchangeable Function description

LED linear lamp. The LED linear lamp is suitable for sensor-switched garden light **GL 60 S** with 3000 K of warm-white light. Technical spe...

lang:it **score:16** filesize: 392.5 K page_count: 1 document date: 2022-09-21

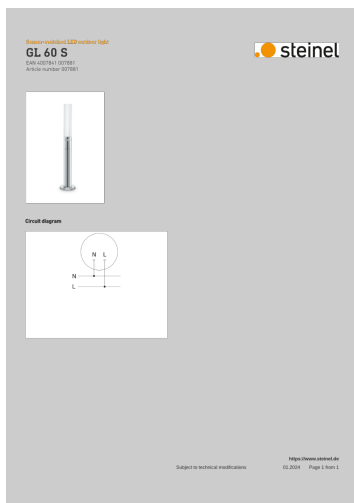

[\[pdf\]](#) Diagram

Schaltpläne process 197733 Circuit diagram 4007841007881 LED OUTDOOR SENSORLIGHT GL 60 S


steinel.de out media wiringdiagram |||

Sensor-switched LED outdoor light **GL 60 S** EAN 4007841 007881 Article number

007881 Circuit diagram Subject to technical modifications https://www.steinel.de

01.2024 Page 1 from 1 ...

lang:it **score:16** filesize: 398.91 K page_count: 1 document date: 2024-01-26

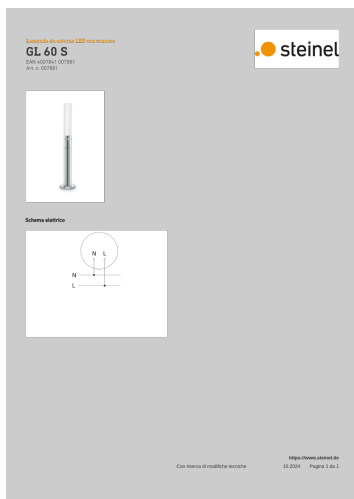

[\[pdf\]](#) Diagram

Schaltpläne process GL 60 S 197735 Schema del circuito 4007841007881 LED OUTDOOR


SENSORLIGHT steinel.it out media wiringdiagram |||

Lampada da esterno LED con sensore **GL 60 S** EAN 4007841 007881 Art. n. 007881

Schema elettrico Con riserva di modifiche tecniche https://www.steinel.de 10.2024

Pagina 1 da 1 ...

lang:it **score:16** filesize: 254.66 K page_count: 1 document date: 2024-10-15

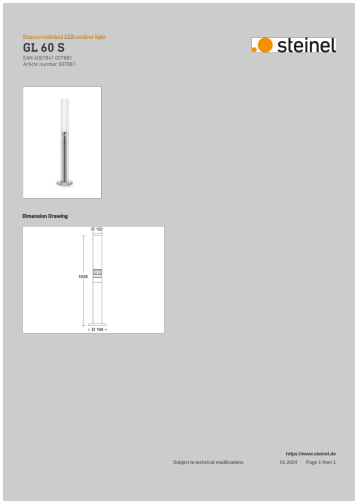


[pdf] Diagram

Technische Zeichnung process 201783 Technical drawing 4007841007881 LED OUTDOOR

SENSORLIGHT GL 60 S steinel de out media technicaldiagram |||

Sensor-switched LED outdoor light **GL 60 S** EAN 4007841 007881 Article number 007881 Dimension Drawing Subject to technical modifications <https://www.steinel.de> 01.2024 Page 1 from 1 ...

lang:it **score:16** filesize: 398.76 K page_count: 1 document date: 2024-01-26

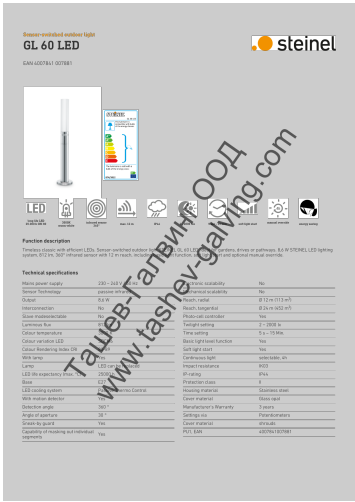


[pdf] User Manual Specifications

process Технически характеристики LED лампа Steinel Sensors DIY градинска със сензор 8 6 W

230 V 44 IP E27 120 мм 3000 K инюкс GL 60 Tashev Galving 071 SNL1050 tashev galving files spec |||

Sensor-switched outdoor light GL 60 LED EAN 4007841 007881 www.tas-hev-galving.com long life LED 2 ... 21 EAN 4007841 001346 EAN 4007841 001339 LED linear lamp for GL 60 LED Replacement glass shade for **GL 60 S** Replacement electronics unit for **GL 60 S** Detection Zone Dimension Drawing www.tas-hev-gal...

lang:en **score:16** filesize: 1.14 M page_count: 2 document date: 2021-01-22

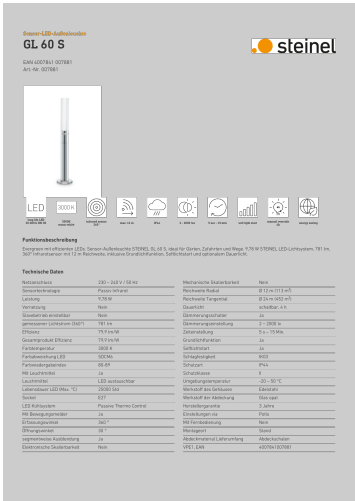

[pdf] User Manual

process GL 60 S10 ore fa — Netzanschluss 230 240 V 50 Hz Sensortechnologie Passiv Infrarot Leistung

9 78 W Vernetzung Nein Slavebetrieb einstellbarlist technickych udaju 1361167 steinel led aussenleuchte

gl s 007881 venkovni nastenne osvetleni pir detektorem e27asset conrad media10 add 160267 c1 de

001361167DS00 list e27 978 w nerezova ocel |||

Sensor-LED-Auenleuchte **GL 60 S** EAN 4007841 007881 Art.-Nr. 007881 long life

LED 25.000 h CRI 80 3000K warm-white infrared sensor 360 max. 12 m IP44 2 - 2000

lux 5 sec - 15 min soft light start manual override 4h energy saving

Funktionsbeschreibung Evergreen mit effizienten LEDs. Sensor-Au...

lang:de **score:15** filesize: 690.42 K page_count: 2 document date: 2022-01-03

Light meets life

Interaktive Licht- und
Sensorlösungen für
maximalen Komfort.




[\[pdf\]](#)

Zum Download Kataloge und Prospekte STEINEL 110088498 Streuprosppekt Sensor DIY DE ANSICHT
steinel.de/out/pictures/ddmedia/|||

Light meets life Interaktive Licht- und Sensorlösungen für maximalen Komfort. Einstieg
Inhaltsverze ... 70 max. 10m Bluetooth Spot Garden SC 71 max. 10m Bluetooth GL
80 S 72 max. 5m Bluetooth **GL 60 S** 73 max. 12m GL 65 S 74 max. 8m XSolar GL-S
76 75 max. 5m Nachtlcht Hauptlicht 10-...

lang:de score:15 filesize: 8.41 M page_count: 71 document date: 2022-02-21

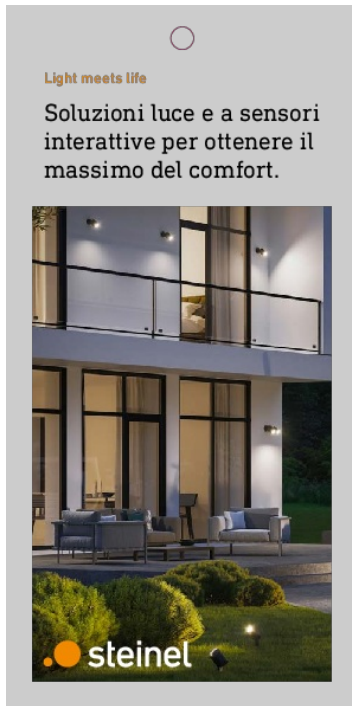

[\[pdf\]](#) Catalog

Scaricare STEINEL Cataloghi e depliant 110090189 Streuprospett Sensor DIY ITA ANSICHT steinel it out pictures ddmedia |||

Light meets life Soluzioni luce e a sensori interattive per ottenere il massimo del comfort. Intro ... max. 10 m Bluetooth Spot Garden SC 71 max. 10 m Bluetooth GL 80 S 72 max. 5 m Bluetooth **GL 60 S** 73 max. 12m GL 65 S 74 max. 8m XSolar GL-S 76 75 max. 5 m Luce notturna 10-50 tra...

lang:it **score:15** filesize: 7.86 M page_count: 67 document date: 2022-02-23



[\[pdf\]](#)

untitled Intelligentes Licht Komfort für zuhause Energie clever nutzen Mit dieser Vision erfand STEINEL vor 20 Jahren die erste Sensorleuchte der Welt Ein Meilenstein in Sachen Katalog DIY Sensor 2008 D Einzelseiten cdn reichelt de documents datenblatt X100 |||


STEINEL Vertrieb GmbH Dieselstrae 80 84 D-33442 Herzebrock-Clarholz / Germany Telefon 49 52 45 ... eite 28 31 L 305 S L 306 S L 262 S SensorLeuchten aus Edelstahl fr Garten und Wand Seite 32 33 **GL 60 S** L 260 S SensorLeuchten in traditioneller Form fr Garten und Wand Seite 34 35 GL 16 S AL 6...

lang:de **score:15** filesize: 3 M page_count: 83 document date: 2008-01-17



[pdf]

Vertriebsdatenblatt V2 DIY admin Produktdatenblatt Ersatzglas GL 60 S Gewinde 001346 von STEINEL
41d2e17f4a6a46209c039c0f3bf9a665 678610 DATEN DE shop iism de media 68 ae 1696606560 |||
Ersatzteil Ersatzglas fr **GL 60 S** EAN 4007841 001346 Art.-Nr. 001346
Funktionsbeschreibung Einfacher Glasaustausch Das Ersatzglas zur Design Sensor Auenleuchte **GL 60 S** mit Gewindeverschluss. Technische Daten Herstellergarantie VPE1, EAN 3 Jahre 4007841001346 Farbe Wei Technische nderungen vorb...
lang:de score:15 filesize: 348.58 K page_count: 1 document date: 2022-09-08

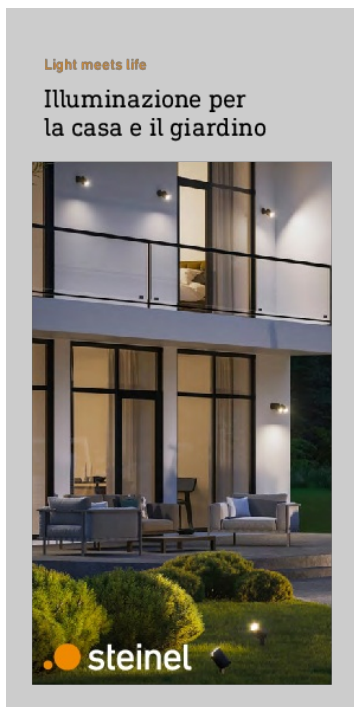

[pdf] Catalog

Scaricare STEINEL Cataloghi e depliant 110101428 Streuprospett Sensor DIY IT RZ Ansicht steinel it
out pictures ddmedia |||
Light meets life Illuminazione per la casa e il giardino Indice 2 Indice Il marchio
STEINEL Li ... olar Illuminazione di base Dettagli in rete e a pag. 156 79 Lampade da
giardino e per vialetti **GL 60 S** Punti di luce in evidenza per il giardino. Sensor 102
Highlights Sensore a infrarossi a 1...
lang:it score:15 filesize: 15.27 M page_count: 174 document date: 2024-10-01

Light meets life

Soluzioni di
illuminazione per la casa.



[\[pdf\]](#) Catalog

Scaricare STEINEL Cataloghi e depliant 110094535 Streuprosppekt Sensor DIY IT steinel it out pictures ddmedia |||

Light meets life Soluzioni di illuminazione per la casa. Indice Indice Informazioni Introduzion ... pade per giardini e vie GL 80 SC Luce perfetta per giardino e sentieri. Lampade per giardini e vie **GL 60 S** Evergreen con alta efficienza. Sensor Connect 102 Sensor Highlights 10-50 Avvio intel...

lang:it **score:15** filesize: 11.92 M page_count: 79 document date: 2023-01-03

Light meets life

Licht für
Haus und Garten




[\[pdf\]](#)

Zum Download Kataloge Prospekte STEINEL STL 13837 23 Streuprosppekt Sensor DIY RZ ANSICHT 1 force sid s2ieiu04klfb2amed16chb42bm steinel de out pictures ddmedia |||

Light meets life Licht fr Haus und Garten Inhaltsverzeichnis 2 Inhaltsverzeichnis ber STEINEL L ... 140 InfrarotSensor Solar Grundlicht Details im Web und auf S. 156 79 Garten- und Wegeleuchten **GL 60 S** Ein glanzvolles Highlight fr deinen Garten. Sensor Garten- und Wegeleuchten GL 65 S Angeneh...

lang:de **score:15** filesize: 13.27 M page_count: 90 document date: 2023-11-14

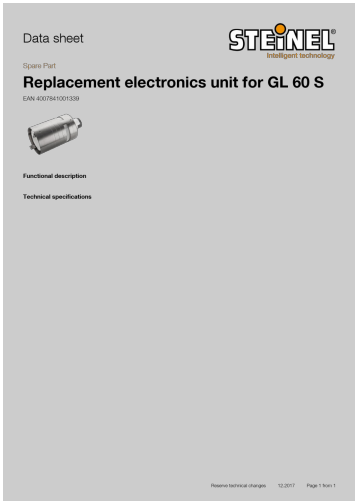


[pdf] Specifications Datasheet Accessories

Data sheet 109527601 Replacement electronics unit for GL 60 S steinel de en lights floodlights accessories spare parts replacement gl s html media datasheet |||

Data sheet Spare Part Replacement electronics unit for **GL 60 S** EAN 4007841001339 Functional description Technical specifications Reserve technical changes <https://www.steinell.de/> 12.2017 Page 1 from 1 ...

lang:de score:15 filesize: 407.27 K page_count: 1 document date: 2017-12-08

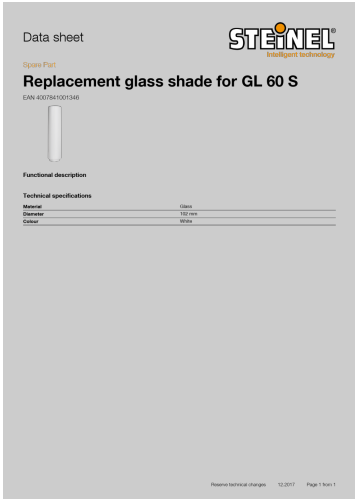

[pdf] Specifications Datasheet Accessories

Data sheet 110030746 Replacement glass shade for GL 60 S steinel de en lights floodlights accessories spare parts replacement gl s html media datasheet |||

Data sheet Spare Part Replacement glass shade for **GL 60 S** EAN 4007841001346 Functional description Technical specifications Material Diameter Colour Glass 102 mm White Reserve technical changes <https://www.steinell.de/> 12.2017 Page 1 from 1 ...

lang:de score:15 filesize: 467.87 K page_count: 1 document date: 2017-12-08



[pdf]

Vertriebsdatenblatt V2 DIY process Fiche produit Tube lumineux de remplacement LED pour GL 60 S 3000K Steinel 008321FICHE1 ts 1700265720675 fra connect mo cloudinary net PRODUCT DOCUMENT 424 |||

Zubehr LED Leuchtstab **GL 60 S** EAN 4007841 008321 Art.-Nr. 008321 Light source not exchangeable Control gear not exchangeable Funktionsbeschreibung LED Leuchtstab. Der LED Leuchtstab passend fr die Garten Sensor Leuchte **GL 60 S** mit 3000 K warmweier Lichtfarbe. Technische Daten Abmessungen x H ...

lang:nl score:14 filesize: 392.41 K page_count: 1 document date: 2023-10-27