

Progress Lighting P6071-31

Progress Lighting P6071-31 Outdoor Wall Lantern Instruction Manual

Model: P6071-31 | Brand: Progress Lighting

INTRODUCTION

This manual provides detailed instructions for the installation, operation, and maintenance of your Progress Lighting P6071-31 outdoor wall lantern. Please read this manual thoroughly before beginning installation or use to ensure proper function and safety.

For your safety, always follow local electrical codes and consult a qualified electrician if you are unsure about any part of the installation process.

SAFETY INFORMATION

WARNING: Always turn off power at the main circuit breaker before installing, cleaning, or servicing this fixture. Failure to do so may result in serious injury or death.

CAUTION: This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

IMPORTANT: Inspect wire insulation for any cuts, abrasions, or exposed copper that may have occurred during shipping. If there is a defect in the wire's insulation, do not attempt installation. Contact customer service.

This fixture is designed for outdoor use and is suitable for wet locations. Ensure all connections are properly sealed to prevent water intrusion.

PACKAGE CONTENTS

Verify that all components are present before beginning installation.

- Light Fixture Assembly
- Mounting Hardware Kit (screws, wire nuts, mounting strap)
- Installation Instructions

Assembly & Installation Instructions

CAUTION: Read instructions carefully and turn electricity off at main circuit breaker panel before beginning installation.

6070, 6071, 6072

WARNING - If any Special Control Devices are used with this Fixture, Follow the Instructions Carefully to assure full compliance with N.E.C. requirements. If there are any questions, contact a Qualified Electrical Contractor.

WARNING - This product contains chemicals known to the State of California to cause cancer, birth defects and /or other reproductive harm. Thoroughly wash hands after installing, handling, cleaning, or otherwise touching this product.

CAUTION - All glass is fragile, use care when handling Glass component(s) and or Lamp(s).

WARNING - To comply with the National Electrical Code and Underwriters Laboratories requirements, when installed outdoors, or in wet locations, the edge of the wall plate coming in contact with the mounting surface, must be sealed with a latex waterproof caulking to prevent water from entering the outlet box.




ASSEMBLY STEPS:

PASOS PARA ENSAMBLAR:


MODE D'ASSEMBLAGE:

1. D,E → A
2. B,A → C
3. F → G
4. H,J → D
5. L → K


B, C, G & L
(NOT FURNISHED)
(NO INCLUIDA)
(NON FOURNIE)

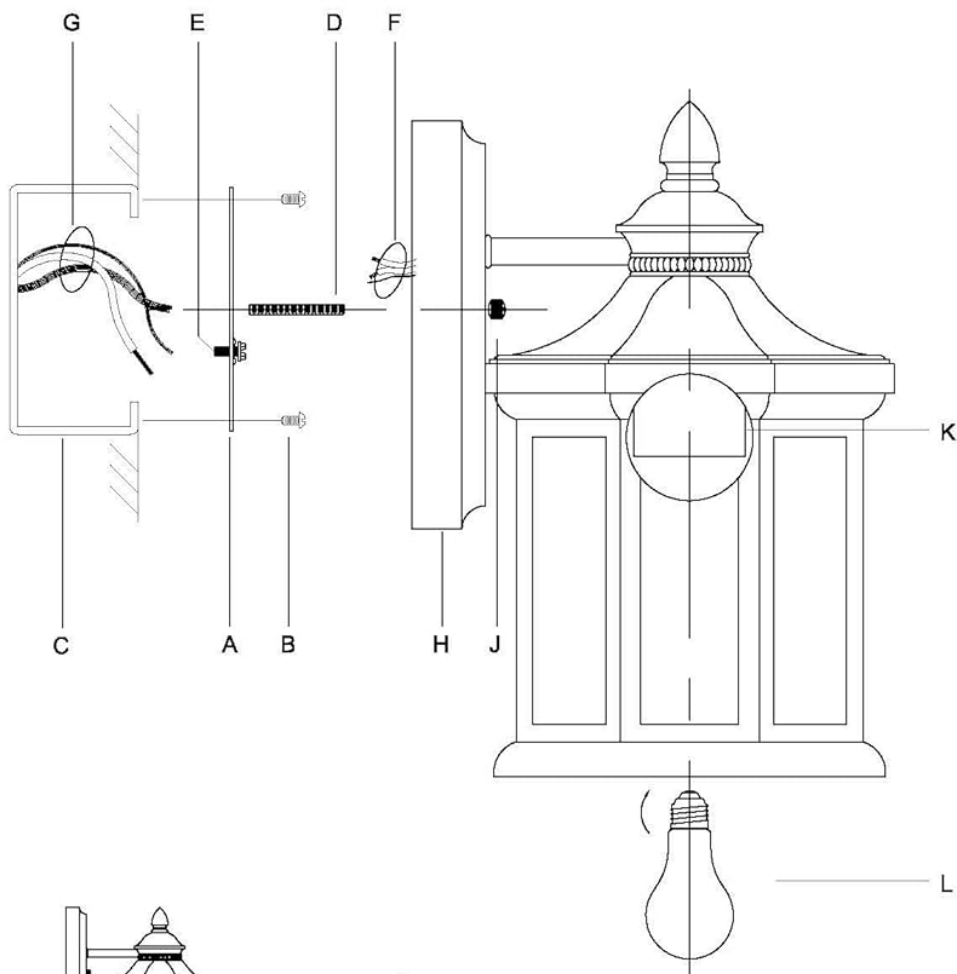

P6072



P6071



P6070

Figure 1: Exploded view of the P6071-31 outdoor wall lantern components.

SPECIFICATIONS

Attribute	Value
-----------	-------

Brand	Progress Lighting
Model	P6071-31
Color	Black
Material	Aluminum
Style	Traditional
Light Fixture Form	Wall
Dimensions (approx.)	Height: 9-1/8", Width: 5-1/2", Depth from wall: 6-1/2"
Bulb Type	Incandescent, 100W Medium Base (Max)
Voltage	120V
Location Rating	cCSAus Wet location listed

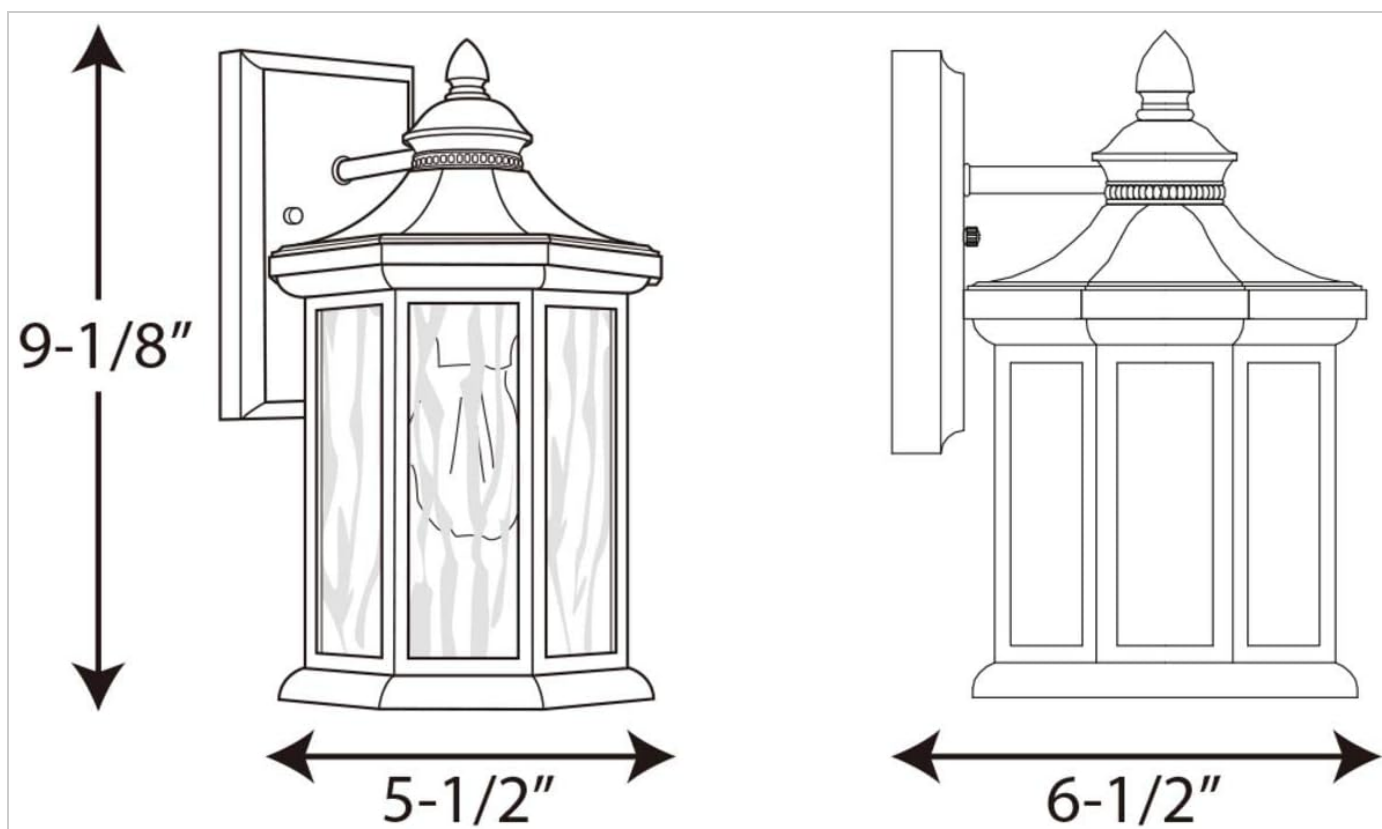


Figure 2: Product dimensions for the P6071-31 fixture.

SETUP AND INSTALLATION

Before you begin, ensure the power is turned off at the circuit breaker. This fixture is designed for wall mounting over a standard 4" hexagonal recessed outlet box.

- 1. Prepare the Mounting Strap:** Attach the mounting strap to the outlet box using the provided mounting screws. Ensure the strap is securely fastened.
- 2. Make Electrical Connections:**

- Connect the bare copper or green ground wire from the fixture to the green ground screw on the mounting strap.
 - Connect the white wire from the fixture to the white (neutral) supply wire using a wire nut.
 - Connect the black wire from the fixture to the black (hot) supply wire using a wire nut.
 - Carefully tuck all wires into the outlet box.
3. **Mount the Fixture:** Align the fixture with the mounting strap and secure it with the provided mounting screws. Ensure the fixture is flush against the wall and sealed to prevent water entry, especially in wet locations.
 4. **Install the Bulb:** Screw in a medium base incandescent bulb (max 100W) into the socket. Do not overtighten.
 5. **Restore Power:** Turn the power back on at the main circuit breaker.

DATE: _____ TYPE: _____

NAME: _____

PROJECT: _____

Incandescent

P6071-31

Edition

One-light medium wall lantern with a distinct hexagonal shape for classic styling, highlighted by clear water glass elements.

Category: Outdoor

Finish: Black (painted)

Construction: Aluminum construction

Glass: Clear Water glass panels



Width: 7-1/8"

Height: 12-1/2"

Depth: 8-1/8"

H/CTR: 3-1/8"

Glass: 2-1/16" W.

Height: 7"

MOUNTING	ELECTRICAL	LAMPING	ADDITIONAL INFORMATION
<p>Wall mounted</p> <p>Mounting strap for outlet box included</p> <p>Back plate covers a standard 4" hexagonal recessed outlet box</p> <p>4-1/2" W., 7-1/16", 1"</p>	<p>Pre-wired</p> <p>6" of wire supplied</p> <p>120V</p>	<p>Quantity: 1</p> <p>100W Medium Base</p> <p>Medium socket</p>	<p>cCSAus Wet location listed</p> <p>1 year warranty</p> <p>Companion fixtures are available</p>

Figure 3: Installation diagram for the P6071-31 outdoor wall lantern.

Once installed and power is restored, the fixture can be operated via the wall switch connected to the circuit. This fixture does not include a built-in switch or sensor.

- Ensure the light bulb is securely screwed into the socket.
- Use a standard wall switch to turn the light fixture on or off.
- For optimal performance and longevity, use bulbs within the specified wattage range.

MAINTENANCE

Regular maintenance will help preserve the appearance and functionality of your outdoor wall lantern.

- **Cleaning:** To clean the fixture, turn off the power at the circuit breaker. Wipe the fixture with a soft, damp cloth. Do not use abrasive cleaners or solvents as they may damage the finish or glass. For glass panels, a mild glass cleaner can be used.
- **Bulb Replacement:** Turn off the power at the circuit breaker and allow the bulb to cool before replacing. Unscrew the old bulb and screw in a new medium base incandescent bulb (max 100W). Do not exceed the maximum wattage.
- **Inspection:** Periodically inspect the fixture for any signs of wear, damage, or loose connections. Ensure the seal around the mounting surface remains intact to prevent water intrusion.



Figure 4: The P6071-31 fixture, showing details of the finish and glass for cleaning reference.

If you encounter issues with your fixture, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Light does not turn on.	<ul style="list-style-type: none">Power is off at the circuit breaker.Loose wire connections.Defective bulb.Faulty wall switch.	<ul style="list-style-type: none">Check circuit breaker and ensure it is in the "ON" position.Turn off power, check all wire connections and tighten if necessary.Replace bulb with a new, working one.Consult a qualified electrician to check the switch.
Light flickers.	<ul style="list-style-type: none">Loose bulb.Loose wire connections.Incorrect bulb type/wattage.	<ul style="list-style-type: none">Tighten bulb in socket.Turn off power, check and tighten wire connections.Ensure bulb is correct type and wattage (max 100W incandescent).
Fixture hums.	<ul style="list-style-type: none">Loose mounting.Incompatible dimmer switch (if applicable).	<ul style="list-style-type: none">Ensure fixture is securely mounted to the outlet box.If using a dimmer, ensure it is compatible with incandescent loads.

WARRANTY AND SUPPORT

This product is covered by a **1-year Limited Warranty** from the date of purchase. This warranty guarantees your complete satisfaction and includes professional after-sales customer service support.

For warranty claims, technical assistance, or any questions regarding your Progress Lighting P6071-31 fixture, please contact Progress Lighting customer service. Please have your model number (P6071-31) and proof of purchase ready when contacting support.

You can find more information and contact details on the official Progress Lighting website:www.progresslighting.com



Related Documents



[\[pdf\]](#) Specifications Warranty Catalog



Edition Collection 1 Light Textured Black Clear Water Glass Traditional Outdoor Medium Wall Lantern
 Specification Progress Lighting P6071 31 785247185597 0785247185597 1001407848 df980acb 9ca8
 4cfe aa56 5e9d698c9f2a images thdstatic catalog Images df |||

MOUNTING	ELECTRICAL	LAMPING	ADDITIONAL INFORMATION
Wall mount Mounting slot for surface hole included Back plate covers a standard 4" hexaground hex nut on deflection 4-1/2" W, 3-1/8", 1"	Powered 6" of wire supplied 120v	Quantity 1 100W Medium Base Made on order	cScan Win license (incl) 1 year warranty Comparison features are available

Width: 7-1/8"
Height: 12-1/2"
Depth: 8-1/8"
Holes: 3-1/8"

Glass: 2-1/16" W.
Height: 7"



[\[pdf\]](#) Specifications Guide

Lighting Packages Quick Guide hubbellcdn This guide helps browse lighting packages including Dark Sky Friendly DURASHIELD and ENERGY STAR products Some are for indoor use only while others are RR PROG QUICK GUIDE BR EN 2023 00887 Interactive Pages ohwassets HLI progress resources literature |||

Lighting Packages Quick Guide The Lighting Packages Quick Guide Browse our popular lighting packag ... lack -31 P6073-31 P6074-31 P6075-31 P6425-31 P6073-20 P6074-20 P6075-20 P6425-20 P6070-31 **P6071-31** P6072-31 P6529-31 P6429-31 P6070-20 P6071-20 P6072-20 P6529-20 P6429-20 P560264-02...

lang:en **score:24** filesize: 60.18 M page_count: 68 document date: 2023-10-18



[\[pdf\]](#) Guide

PL 1636 2021 Lighting Packages Quick Guide 7 6 21 Screen hubbellcdn s3 amazonaws ohwassets HLI progress resources literature |||

DECORATIVE LIGHTING PACKAGES LIGHTING PACKAGES QUICK GUIDE DECORATIVE LIGHTING PACKAGES The Light ... P6062-31 P6063-31 P6064-31 P6428-31 P6070-20 P6071-20 P6072-20 P6529-20 P6429-20 P6070-31 **P6071-31** P6072-31 P6529-31 P6429-31 P560057-020 P560058-020 P550020-020 P550021-020 P540020-020 ...

lang:en **score:22** filesize: 19.93 M page_count: 48 document date: 2021-08-30