

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [blonbar](#) /

› [Sunrise Alarm Clock with Wireless Charging Desk Touch Lamp 3 Level Dimmable Wake-up Light Bedside Lamps for Bedroom Living Room,Sunrise Lamp with 10 Natural White Noise Sound 30/60/90 Mins countdown Modern](#)

blonbar Blonbar-AJ310

Sunrise Alarm Clock with Wireless Charging Desk Touch Lamp

Brand: blonbar | Model: Blonbar-AJ310

INTRODUCTION

This multi-functional blonbar bedside lamp integrates several features into one compact device: an alarm clock, desk lamp, wireless charger, and wake-up light. It also offers 10 soothing natural sounds for countdowns and sleep aid. Designed for convenience and efficiency, this manual provides detailed instructions for setup, operation, and maintenance to ensure optimal performance.

SETUP



Assembly

The blonbar lamp comes in two main parts: the lamp body with the clock display and the wireless charging base. To assemble, align the connector on the lamp body with the slot on the wireless charging pad. Insert the connector firmly until you hear a 'clicking' sound, indicating a successful installation. Ensure the main body and wireless charging pad are perfectly aligned with no deviation of 1-2mm for proper wireless charging functionality.

Installation Tips

1. Ensure the main body and wireless charging pad are side-aligned.
2. A 'Clicking sound' indicates successful installation.
3. If you find that the wireless charging function doesn't work, please check whether the installation is successful!

Insert the connector into the slot.

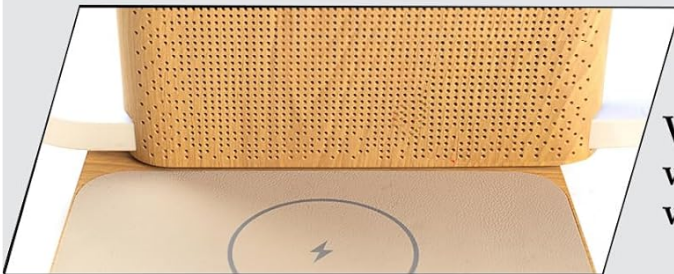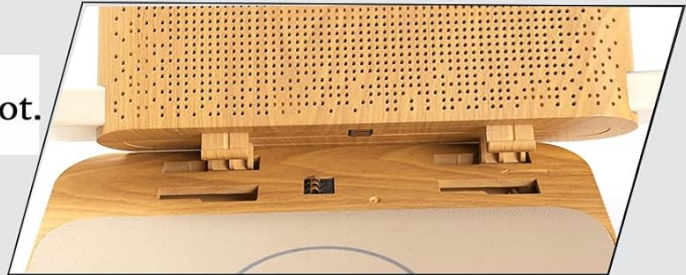

Wireless charging pad does not work when the body is **not aligned** with the wireless charging pad



The body is **perfectly aligned** with the wireless charging pad with no 1-2mm deviation

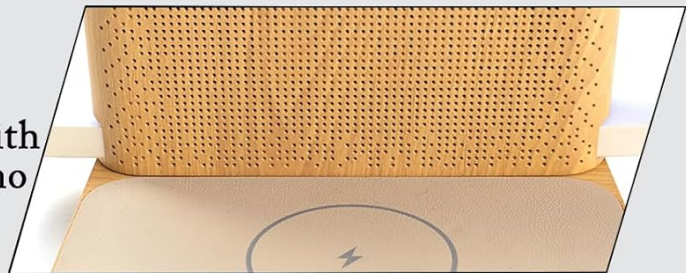


Figure 1: Visual guide for aligning and inserting the lamp body into the charging base. Proper alignment is crucial for functionality.



Figure 2: The fully assembled blonbar lamp, ready for use on a bedside table.

Initial Power-On

After assembly, plug the provided adapter into the DC 12V port located at the back of the lamp's base. Connect the adapter to a power outlet. The digital clock display will illuminate, indicating successful power-on.

Your browser does not support the video tag.

Video 1: Product Operation Video. This video demonstrates the assembly process and initial power-on steps for the blonbar lamp.

OPERATING INSTRUCTIONS

Screen Brightness Adjustment

To adjust the brightness of the digital clock display, short press the **SNOOZE** button. The display has 4 levels of brightness: High, Medium, Low, and Off. Cycle through these levels by repeatedly pressing the button until your desired brightness is achieved. If the minimum brightness is still too bright, you can turn the display off completely.

SNOOZE & SCREEN BRIGHTNESS ADJUSTMENT

10 Minutes of Snooze to Avoid Oversleep
4-Levels of Screen Brightness to Avoid Disturbing Your Sleep



Figure 3: Illustration of the digital clock display brightness levels, from off to level 3 (brightest).

12/24 Hour System Switch

To switch between 12-hour (AM/PM) and 24-hour time formats, short press the **CLOCK** button. The AM/PM indicator light will change accordingly.

SWITCHING BETWEEN 12/24 HOUR SYSTEM

Switch 12/24 hour
according to your preference

12H-System



24H-System

Figure 4: The clock display showing both 12H-System (AM/PM) and 24H-System time formats.

Clock Setting

To set the time, long press the **CLOCK** button. The