Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

GODOX ML II-C4

GODOX ML II-C4 MoveLink II Smart Charging Case User Manual

Model: ML II-C4

Introduction

This manual provides comprehensive instructions for the safe and efficient use of your GODOX ML II-C4 MoveLink II Smart Charging Case. Please read this manual thoroughly before operation and retain it for future reference.

Note: This product is only a charging case. The Godox MoveLink II M2 Wireless Lavalier Microphone system components (transmitters and receivers) are not included and must be purchased separately.



Figure 1: GODOX ML II-C4 MoveLink II Smart Charging Case with included USB-C charging cable.

Product Features

- **Extended Operating Time:** The ML II-C4 supports charging for two transmitters and one receiver, providing up to 30 hours of total operating time for the MoveLink II system. This is ideal for extended recording sessions and outdoor activities.
- **Battery Level Display:** An integrated digital display provides real-time monitoring of the charging case's internal battery level, ensuring you are aware of available power.
- **Rapid Charging:** The case can fully recharge all three units (two transmitters and one receiver) in approximately 1.5 hours.
- **Portability:** Weighing 227g (case only) or 308g (with MoveLink II components), the ML II-C4 is designed for easy transport.
- **Self-Charging:** The charging case itself can be fully recharged in approximately 2 hours via its USB-C port.



Figure 2: The ML II-C4 charging case with MoveLink II components inserted, highlighting the battery level display and compact design.



Figure 3: Overview of extended charging capabilities: 30 hours of operation, 3 full charges for devices, and 1.5 hours for full device charging.

Package Contents

Verify that all items are present in your package:

- 1 x GODOX ML II-C4 Charging Case
- 1 x USB-A to USB-C Data Cable

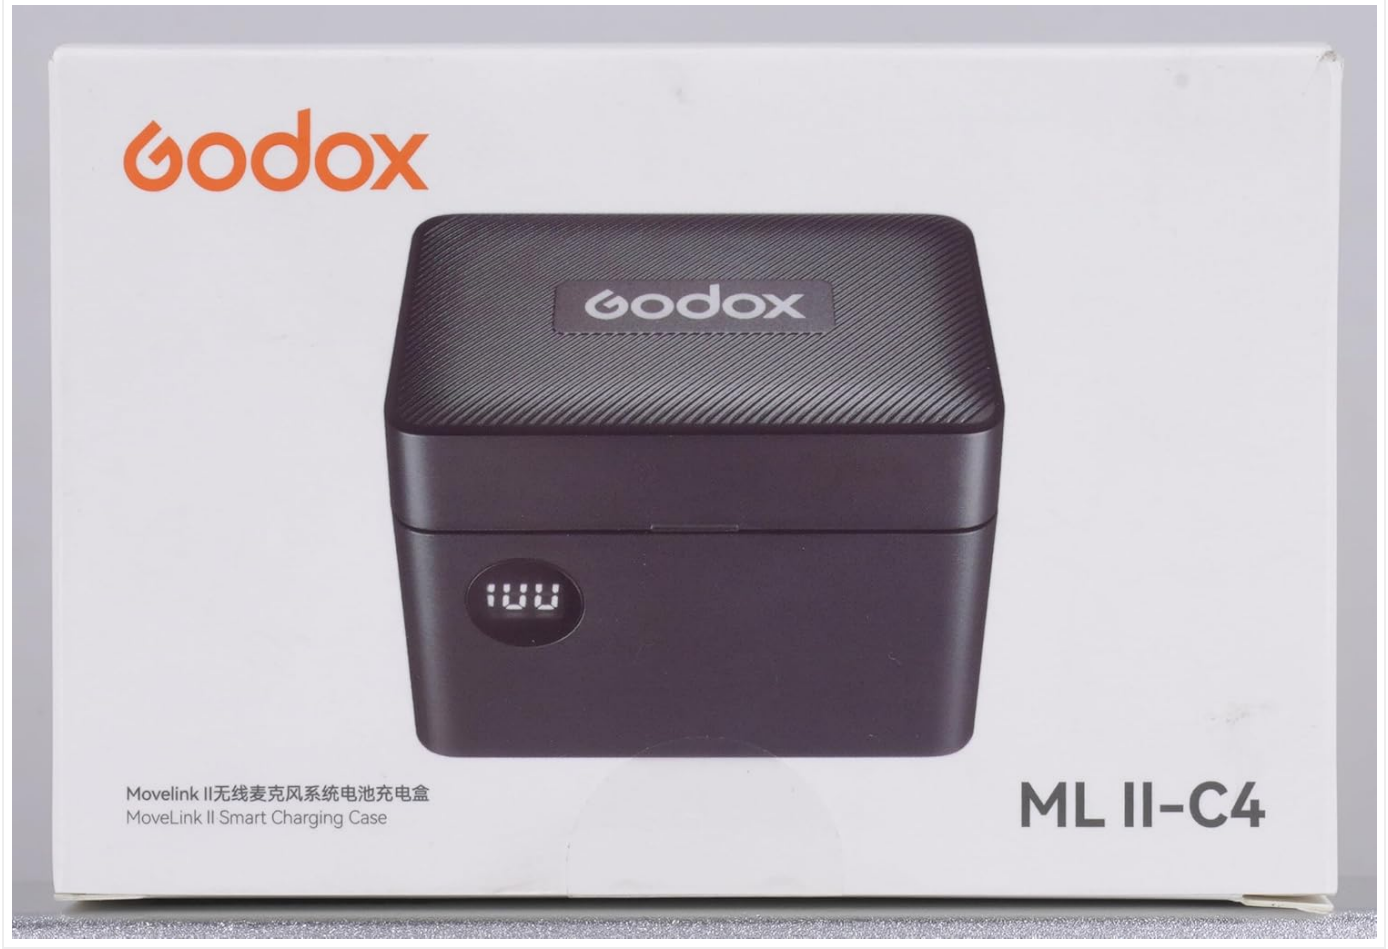


Figure 4: Front view of the GODOX ML II-C4 retail packaging.



Figure 5: Contents of the GODOX ML II-C4 package: the charging case and a USB-A to USB-C data cable.

Setup and Initial Use

1. **Unpacking:** Carefully remove the charging case and all accessories from the packaging.
2. **Initial Charge of Case:** Before first use, it is recommended to fully charge the ML II-C4 charging case. Connect the provided USB-A to USB-C cable to the USB-C port on the side of the charging case and plug the USB-A end into a compatible USB power adapter (not included). The digital display will show the charging progress. A full charge takes approximately 2 hours.
3. **Inserting Devices:** Open the lid of the charging case. Insert your Godox MoveLink II M2 transmitters and receiver into their respective slots. Ensure they are seated correctly.



Figure 6: The digital display on the charging case indicates the remaining battery level. It activates when the lid is opened and turns off after 5 seconds when the lid is closed.

Operating Instructions

1. **Charging MoveLink II Components:**

   Once the MoveLink II transmitters and receiver are placed in their slots, they will begin charging automatically if the case has sufficient power. The charging indicator lights next to each slot will flash green while charging and turn off when the device is fully charged.



Figure 7: Charging indicators. Left: Flashing green indicates charging. Right: Off indicates fully charged.

2. **Monitoring Case Battery Level:**

   Open the lid of the charging case to view the current battery percentage on the digital display. The display will remain active for approximately 5 seconds before turning off to conserve power.

3. **Recharging the Case:**

   When the charging case's battery level is low, connect it to a USB power source using the provided USB-C cable. The digital display will show the charging status of the case.

Maintenance

- **Cleaning:** Use a soft, dry cloth to clean the exterior of the charging case. Avoid using harsh chemicals or abrasive materials.
- **Storage:** Store the charging case in a cool, dry place away from direct sunlight and extreme temperatures.
- **Battery Care:** To prolong battery life, avoid fully discharging the case frequently. Recharge it regularly, even if not in constant use.

Troubleshooting

Problem	Possible Cause	Solution
Devices not charging in case.	Charging case battery is depleted. Devices not seated correctly.	Recharge the charging case. Ensure transmitters/receiver are firmly placed in their slots.
Charging case not charging.	USB cable or power adapter faulty. USB-C port obstructed.	Try a different USB-C cable and power adapter. Check the USB-C port for debris.
Digital display not showing battery level.	Lid is closed for too long. Case battery is completely depleted.	Open the lid to activate the display. Recharge the charging case.

Specifications

Feature	Detail
Model Number	ML II-C4
Brand	GODOX
Compatible Devices	Godox MoveLink II M2 Wireless Lavalier Microphone System
Battery Type	Lithium Ion
Number of Batteries (internal)	1 (required)
Connectivity Technology	USB
Connector Type	USB Type-C
Special Feature	Battery Indicator Light (Digital Display)
Item Weight (Case Only)	227g (0.5 lbs)
Item Weight (with MoveLink II)	308g (0.68 lbs)
Package Dimensions	8.07 x 7.68 x 2.17 inches
Manufacturer	Godox
Date First Available	April 5, 2024

Warranty and Support

For warranty information and technical support, please contact GODOX directly. Details can be found on the product packaging or the official GODOX website.

Manufacturer: GODOX Photo Equipment Co., Ltd.
Address: Building 2, Yaochuan Industrial Zone, Tangwei Community, Fuhai Street, Bao'an District, Shenzhen 518103, China
Tel: +86-755-29609320(8062)
Fax: +86-755-25723423
Email: godox@godox.com
Website: www.godox.com

You can also find official updates and information via:

- Godox Audio WeChat Official Account: http://weixin.qq.com/r/FRMtNXLEvy-ArTZW90YH
- Overseas Official Accounts & Updates: https://linktr.ee/godoxaudio

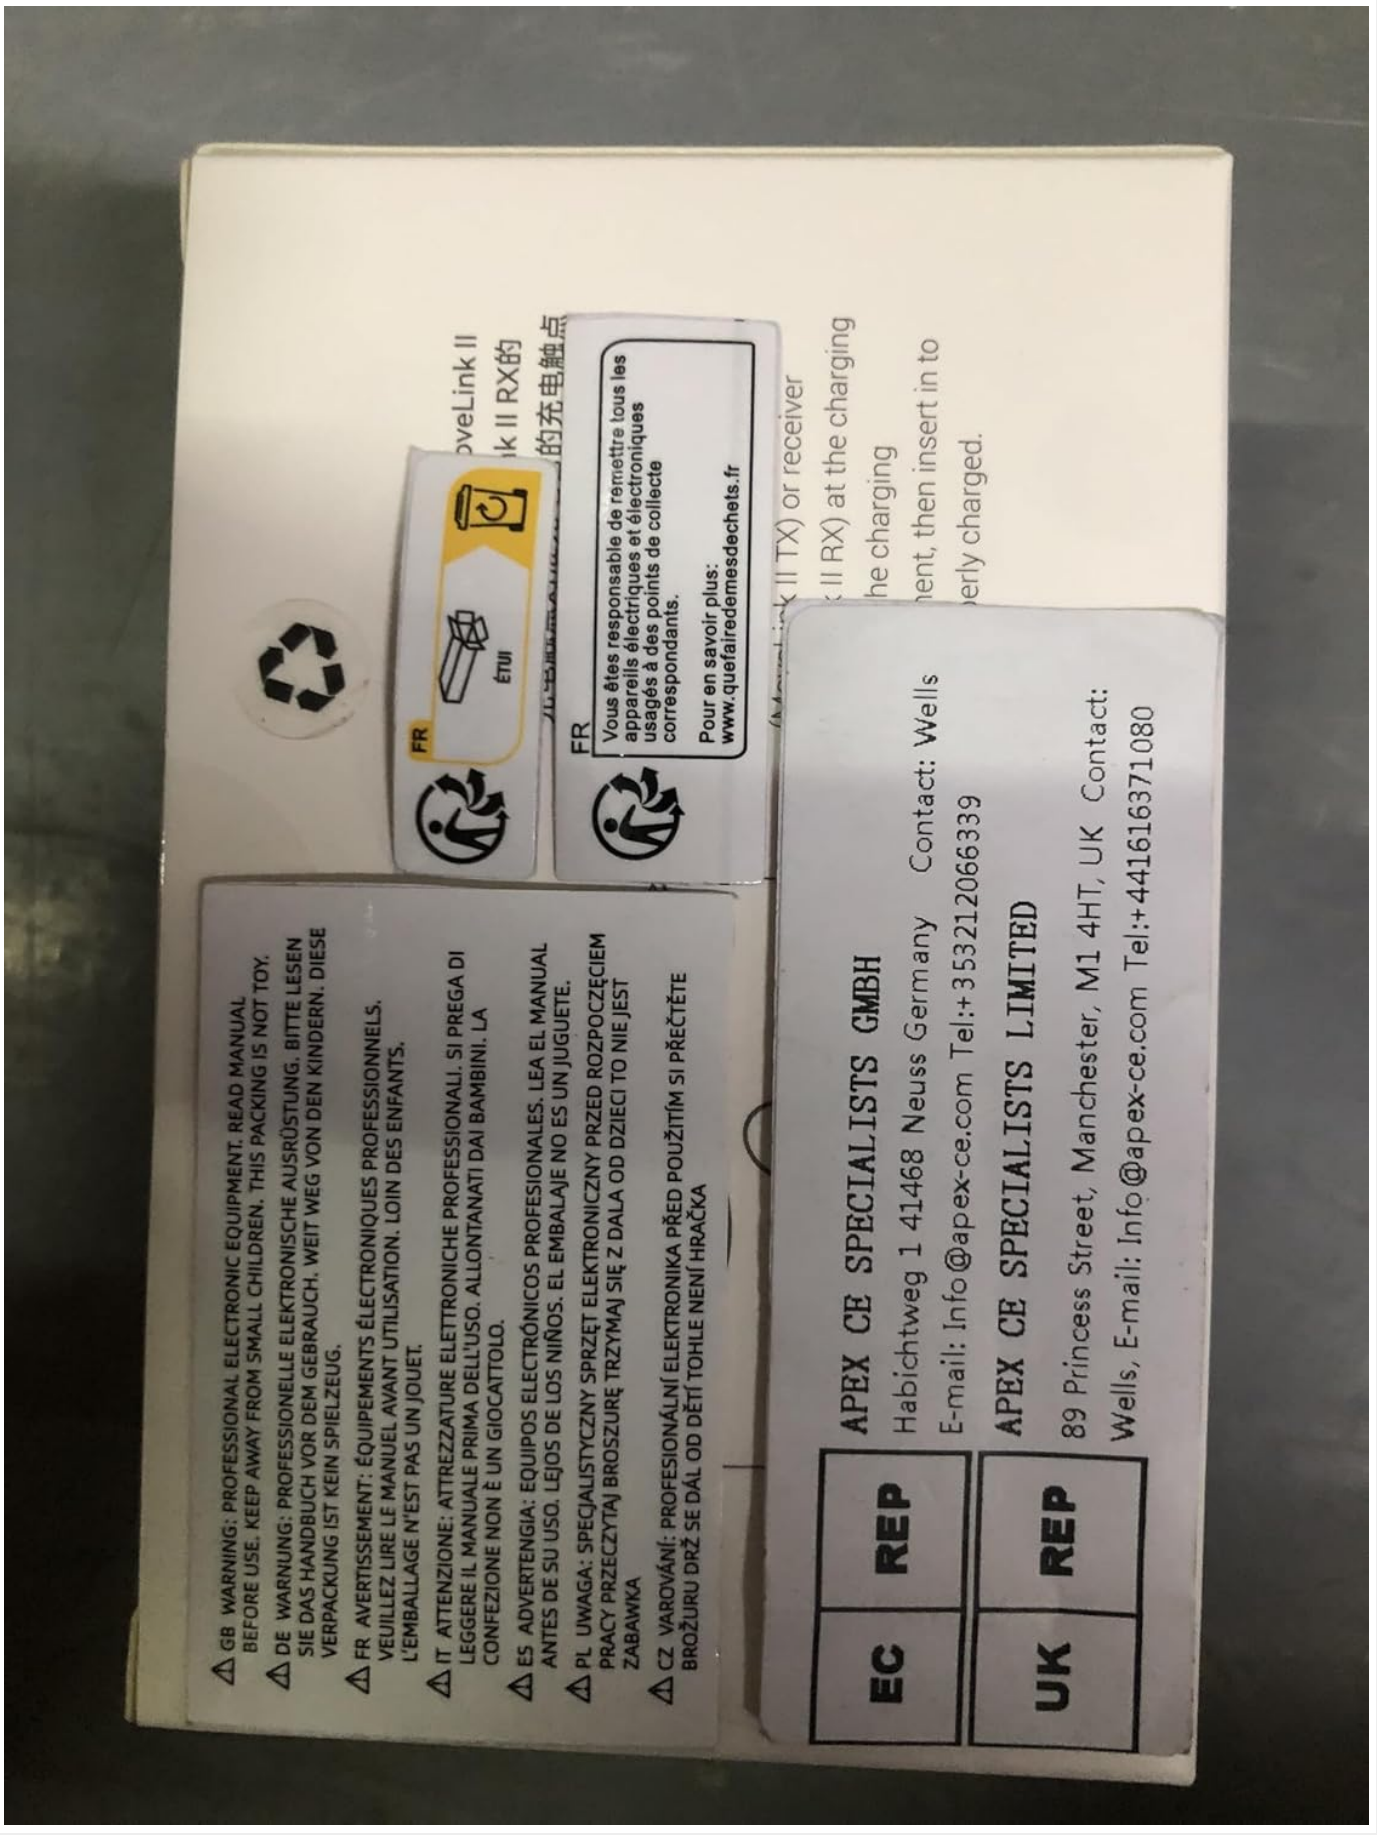


Figure 8: Product packaging displaying manufacturer contact details and regulatory compliance marks.



Figure 9: Bottom of the product packaging with QR codes for official accounts and the UPC barcode.

© 2024 GODOX. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0CZXVDH42

More documents and user manuals: **https://manuals.plus/**