

Fiamma 98655-947

Fiamma 98655-947 Rain Guard Van Seal Kit Instruction Manual

1. INTRODUCTION

The Fiamma 98655-947 Rain Guard Van Seal Kit is engineered to create a secure, watertight seal between your campervan's awning and the vehicle wall. This essential accessory prevents water infiltration, significantly enhancing comfort and protection inside your vehicle during various weather conditions. This kit is specifically designed for compatibility with Fiamma F45s and F35 Pro awnings.

2. PRODUCT OVERVIEW

The Fiamma 98655-947 Rain Guard Van Seal Kit consists of a durable rubber guard designed to bridge the gap between your awning and the vehicle. It measures 300 cm (3 meters) in length, providing ample coverage for compatible awnings. Its primary function is to divert rainwater away from the vehicle's interior, ensuring a dry and comfortable environment.

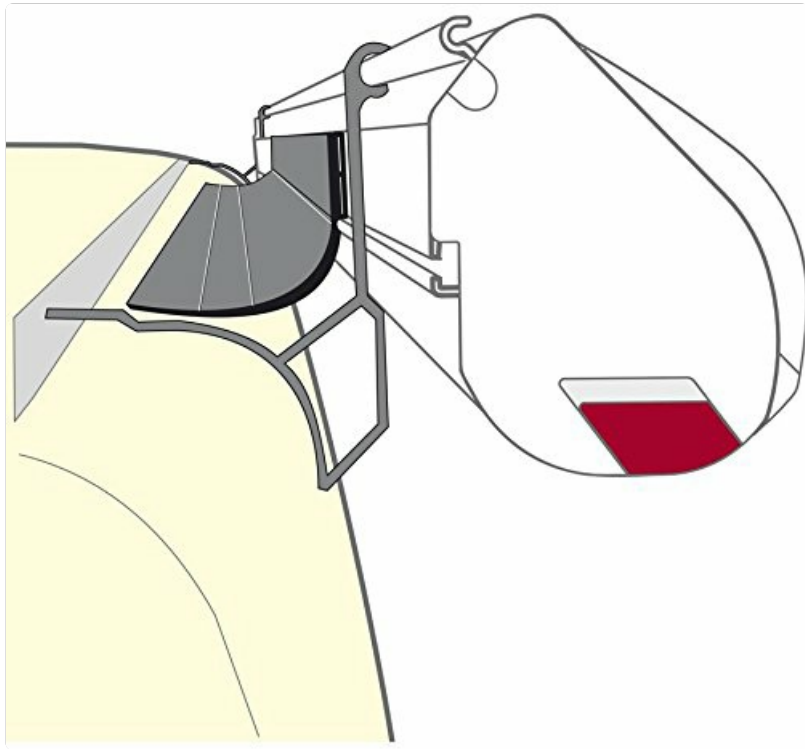


Image 1: Fiamma 98655-947 Rain Guard Van Seal Kit. This image shows the black rubber seal kit, which is used to prevent water from entering the gap between a campervan's awning and its body.

3. SAFETY INSTRUCTIONS

- Always read these instructions thoroughly before beginning installation.
- Ensure you have all necessary tools and components before starting.
- Work in a stable and well-lit environment.
- If working at height, use appropriate safety equipment and ensure the vehicle is stable.
- Keep children and pets away from the installation area.

4. PACKAGE CONTENTS

The Fiamma 98655-947 Rain Guard Van Seal Kit typically includes:

- 1 x Fiamma 98655-947 Rain Guard Van Seal (300 cm length)
- Any necessary mounting hardware or adhesive (as supplied by manufacturer)

5. SETUP AND INSTALLATION

This seal kit is designed for Fiamma F45s and F35 Pro awnings, particularly when installed on Embossed Multivan spaced WALL MOUNTED configurations.

1. **Prepare the Surface:** Thoroughly clean the area on the campervan wall and the awning casing where the seal will be applied. Ensure surfaces are free of dirt, grease, and moisture. Use a suitable cleaning agent and allow to dry completely.
2. **Position the Awning:** Ensure your Fiamma F45s or F35 Pro awning is correctly mounted and in its closed position.
3. **Measure and Cut (if necessary):** The seal is 300 cm long. If your awning is shorter, carefully measure the required length and cut the seal with a sharp utility knife. Ensure a clean, straight cut.

4. **Apply the Seal:** Carefully position the rubber seal into the gap between the awning casing and the vehicle wall. The seal should fit snugly, creating a continuous barrier.
5. **Secure the Seal:** Depending on the specific design of your awning and vehicle, the seal may be secured using an integrated channel, adhesive, or clips. Follow any specific instructions provided with your awning or the seal kit for proper attachment. Ensure the seal is firmly pressed into place along its entire length to achieve maximum adhesion and sealing effectiveness.
6. **Inspect:** Once installed, visually inspect the entire length of the seal to ensure there are no gaps, twists, or loose sections.

6. OPERATING INSTRUCTIONS

While the seal kit itself does not have operational controls, its effectiveness relies on proper installation and regular inspection.

- **Regular Inspection:** Periodically check the seal for any signs of wear, damage, or detachment, especially after long journeys or exposure to harsh weather.
- **Awning Usage:** Ensure the awning is properly retracted and secured when not in use or during travel to protect the seal from unnecessary stress or damage.

7. MAINTENANCE

- **Cleaning:** Clean the rubber seal regularly with mild soap and water. Avoid harsh chemicals or abrasive cleaners that could damage the material. Rinse thoroughly and allow to air dry.
- **Condition Check:** Look for any cracks, tears, hardening, or signs of deterioration in the rubber.
- **Replacement:** If the seal shows significant damage or no longer provides an effective barrier against water, it should be replaced promptly to maintain the integrity of your campervan's protection.

8. TROUBLESHOOTING

| Issue | Possible Cause | Solution |
|--------------------|--|--|
| Water infiltration | Seal improperly installed, damaged, or detached. | Inspect the entire length of the seal for gaps or damage. Re-position, re-secure, or replace the seal as necessary. |
| Seal detachment | Inadequate adhesion during installation, material fatigue. | Clean the surfaces thoroughly and re-attach the seal using appropriate adhesive or fasteners. If the seal is old or damaged, consider replacement. |

9. SPECIFICATIONS

- **Model:** 98655-947
- **Brand:** Fiamma
- **Product Dimensions (Packaging):** 29.3 x 30.1 x 16 cm
- **Item Weight:** 1.93 kg
- **Seal Length:** 300 cm (3 meters)
- **Compatibility:** Fiamma F45s and F35 Pro awnings, suitable for Embossed Multivan spaced WALL MOUNTED installations.

10. WARRANTY AND SUPPORT

Information regarding warranty terms and customer support for the Fiamma 98655-947 Rain Guard Van Seal Kit is not available in this manual. For detailed warranty information, technical assistance, or to contact customer support, please refer to the product packaging, the official Fiamma website, or your authorized dealer.