

[Manuals.plus](#) /

› [Bewinner](#) /

› Bewinner Wireless Video Doorbell User Manual

Bewinner Bewinnera52ubwgpkh

Bewinner Wireless Video Doorbell User Manual

Model: Bewinnera52ubwgpkh

PRODUCT OVERVIEW

The Bewinner Wireless Video Doorbell provides advanced home surveillance with its 2MP 1080p HD camera and a 4.3-inch monitor. Designed for ease of use and comprehensive security, it features a 160° wide-angle view, night vision capabilities, and PIR motion detection to keep your home secure around the clock.



Image: The Bewinner Wireless Video Doorbell system, showing the indoor monitor unit on the left and the outdoor camera unit on the right. The monitor displays a live feed, while the camera features a sleek, circular design.

PACKAGE CONTENTS

Before beginning installation, please verify that all components are present in the package:

- Indoor Monitor Unit (with 4.3-inch screen)
- Outdoor Camera Unit (doorbell camera)
- USB Charging Cable
- Mounting Bracket
- Mounting Screws and Anchors
- User Manual (this document)



Image: A flat lay of all components included with the Bewinner Wireless Video Doorbell. This includes the indoor monitor, outdoor camera, USB charging cable, a set of mounting screws, and the mounting bracket.

SETUP AND INSTALLATION

1. Charging the Device

The indoor monitor unit is equipped with a built-in 5000mAh rechargeable lithium battery. Before first use, fully charge the device using the provided micro USB charging cable. A full charge typically provides 40 to 60 days of operation, depending on usage.



Image: A close-up view of the Bewinner Video Doorbell monitor being charged via a micro USB cable. An overlay graphic indicates the 5000mAh battery capacity.

2. Mounting the Outdoor Camera

The outdoor camera unit is designed for screw-in installation. Choose a suitable location near your door, ensuring a clear view of the entrance. Use the provided mounting bracket, screws, and anchors to securely attach the camera unit to the wall or door frame.

Ensure the camera is positioned to capture the optimal 160° diagonal wide-angle view of your doorstep.

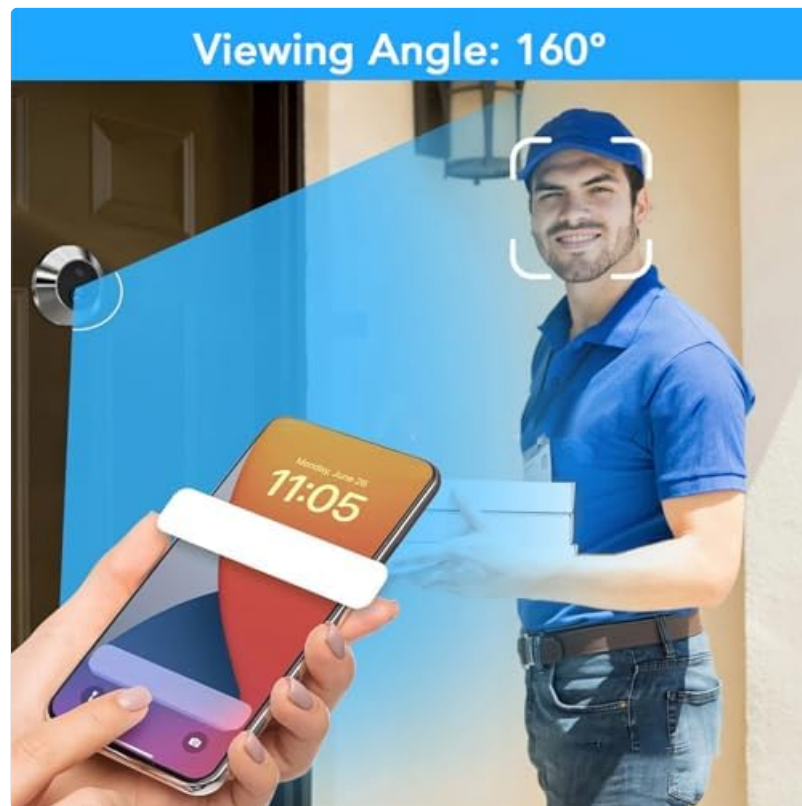


Image: A visual representation of the Bewinner Video Doorbell's 160-degree viewing angle, showing a wide area covered from the doorbell's perspective, including a person standing at the door.

3. Connecting to the Mobile App

The Bewinner Wireless Video Doorbell can be controlled and monitored via a dedicated mobile application. Download the app from your device's app store and follow the on-screen instructions to pair your doorbell with your smartphone. This enables real-time live streaming, notifications, and settings customization.



Image: An illustrative diagram showing the Bewinner Video Doorbell system, highlighting its connectivity to a smartphone app for features like 1080p HD pixels, customizable settings, low power consumption, automatic recording, motion detection, and HD night vision.

OPERATING INSTRUCTIONS

Live View and Monitoring

Access the live video feed from your doorbell camera at any time through the indoor monitor or the mobile app. The 2MP 1080p HD resolution provides a clear view of visitors and surroundings.

PIR Motion Detection

The doorbell features Smart PIR (Passive Infrared) human induction detection. When motion is detected within 1 to 3 meters of the door for 5 seconds, the system automatically starts capturing video and sends an alarm notification to your mobile app. You can adjust the sensitivity of the PIR sensor to one of three levels: high, medium, or low, to suit your environment.

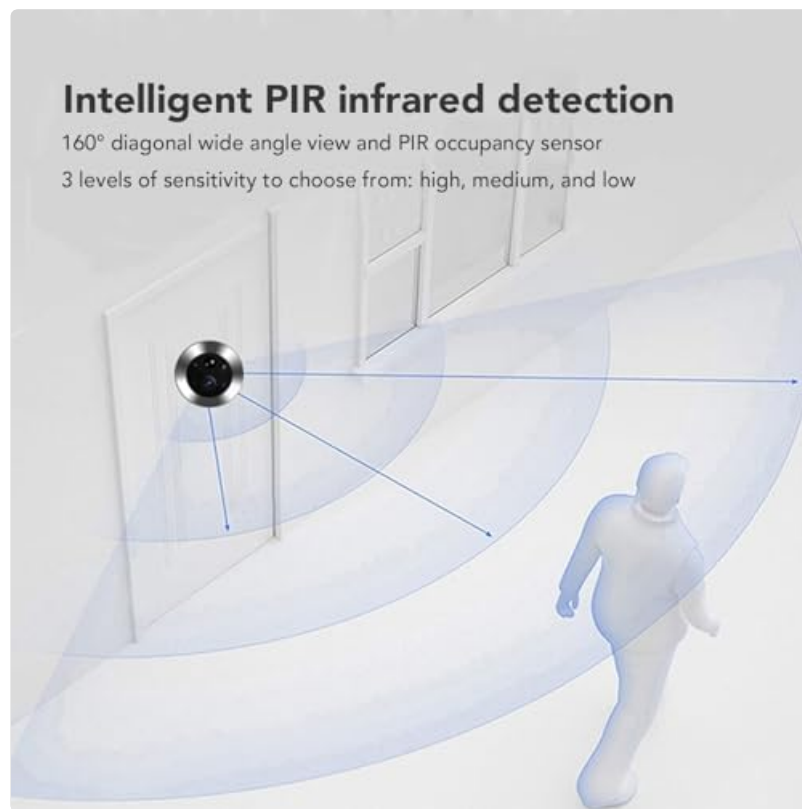


Image: A diagram illustrating the intelligent PIR infrared detection capabilities of the Bewinner Video Doorbell, showing the 160-degree diagonal wide-angle view and how it detects human presence within its sensing range.

24-Hour Surveillance and Recording

The system provides continuous 24-hour monitoring. With HEVC (H.265) encoding protocol, live streaming is smooth, and video uploads are fast. If a Micro storage card (not included) is inserted, the doorbell will continue recording even during network outages, ensuring no critical moments are missed.

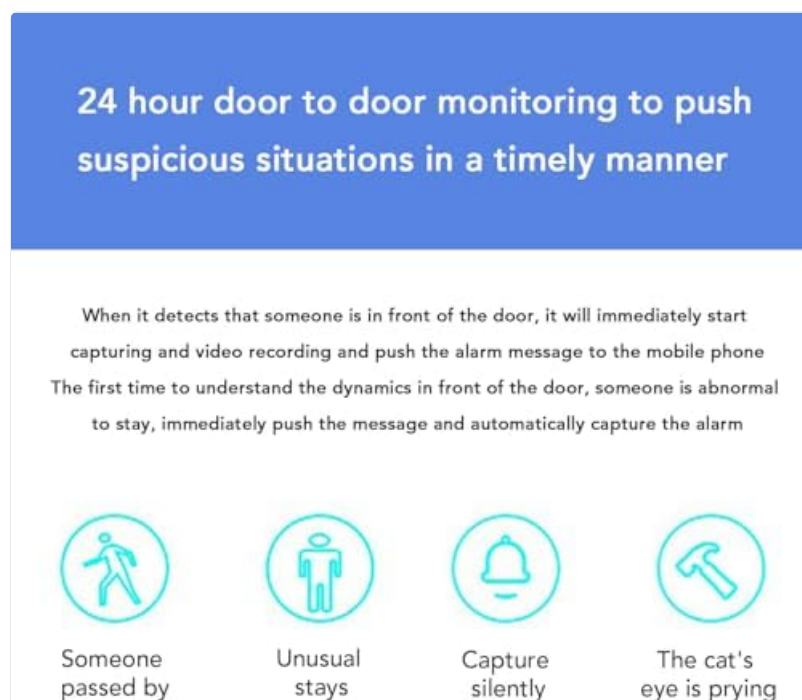


Image: A graphic detailing the 24-hour door-to-door monitoring feature of the Bewinner Video Doorbell, explaining how it captures and records video, and pushes alarm messages to the mobile phone when suspicious situations are detected, such as someone passing by, unusual stays, silent capture, or prying attempts.

Night Vision

The doorbell is equipped with night vision capabilities, allowing for clear video monitoring even in low-light or dark conditions.

MAINTENANCE

To ensure optimal performance and longevity of your Bewinner Wireless Video Doorbell, follow these maintenance guidelines:

- **Cleaning:** Gently wipe the camera lens and monitor screen with a soft, dry, lint-free cloth. Avoid using abrasive cleaners or solvents.
- **Battery Care:** Recharge the indoor monitor unit when the battery level is low. Avoid completely draining the battery frequently to prolong its lifespan.
- **Firmware Updates:** Check the mobile app periodically for any available firmware updates for your doorbell. Keeping the firmware updated ensures the best performance and security features.
- **Environmental Protection:** While the outdoor unit is designed for outdoor use, extreme weather conditions (e.g., heavy rain, snow, direct prolonged sunlight) may affect performance. Ensure it is installed in a reasonably sheltered location if possible.

TROUBLESHOOTING

If you encounter issues with your Bewinner Wireless Video Doorbell, refer to the following common troubleshooting steps:

- **No Power/Device Not Turning On:**
 - Ensure the indoor monitor unit is fully charged. Connect it to the USB charging cable and allow it to charge for several hours.
 - Verify the charging cable and power adapter are functioning correctly.
- **No Video Feed/Poor Video Quality:**
 - Check the Wi-Fi connection strength between the doorbell and your router.
 - Ensure the camera lens is clean and free from obstructions.
 - Restart both the indoor monitor unit and your mobile app.
- **Motion Detection Not Working/Too Sensitive:**
 - Adjust the PIR motion detection sensitivity settings in the mobile app (High, Medium, Low).
 - Ensure there are no objects constantly moving in the camera's field of view that might trigger false alarms (e.g., tree branches, flags).
 - Verify the detection zone settings in the app, if available.
- **Notifications Not Received:**
 - Check your mobile phone's notification settings for the doorbell app to ensure notifications are enabled.
 - Verify your phone has an active internet connection.
 - Ensure the doorbell is connected to Wi-Fi.

SPECIFICATIONS

Feature	Detail
Model Name	Bewinnera52ubwgpkh
Camera Resolution	2MP 1080p HD
Monitor Screen Size	4.3 inches

Feature	Detail
Viewing Angle	160° Diagonal Wide Angle
Motion Detection	PIR Human Induction Sensor (3 sensitivity levels)
Night Vision	Yes
Battery Capacity	5000mAh Rechargeable Lithium Battery
Charging Interface	Micro USB
Battery Life	40 to 60 days (approx.)
Connectivity	Wireless (App Control)
Video Encoding	HEVC (H.265)
Storage	Micro Storage Card (not included)
Product Dimensions	7.48 x 5.12 x 3.15 inches
Item Weight	1.23 pounds (556 Grams)
Installation Type	Screw In

WARRANTY AND SUPPORT

For detailed warranty information regarding your Bewinner Wireless Video Doorbell, please refer to the warranty card included in your product packaging or visit the official Bewinner website. Warranty terms and conditions may vary by region and purchase date.

For technical support, troubleshooting assistance beyond this manual, or customer service inquiries, please contact Bewinner customer support through their official channels. Contact information can typically be found on the Bewinner website or on your product packaging.

© 2024 Bewinner. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question