Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

Jaclo 5812-72CT-PN

Jaclo 5812-72CT-PN Angle Compress Toilet Kit User Manual

Model: 5812-72CT-PN | Brand: Jaclo

Introduction

This manual provides detailed instructions for the installation, operation, maintenance, and troubleshooting of the Jaclo 5812-72CT-PN Angle Compress Toilet Kit. Please read this manual thoroughly before beginning installation or use to ensure proper function and safety.

The Jaclo 5812-72CT-PN is a 5/8" x 3/8" Angle Compress Toilet Kit with a CVR Tube, finished in Polished Nickel. It is designed for plumbing applications, specifically for connecting water supply to toilets.

Product Overview

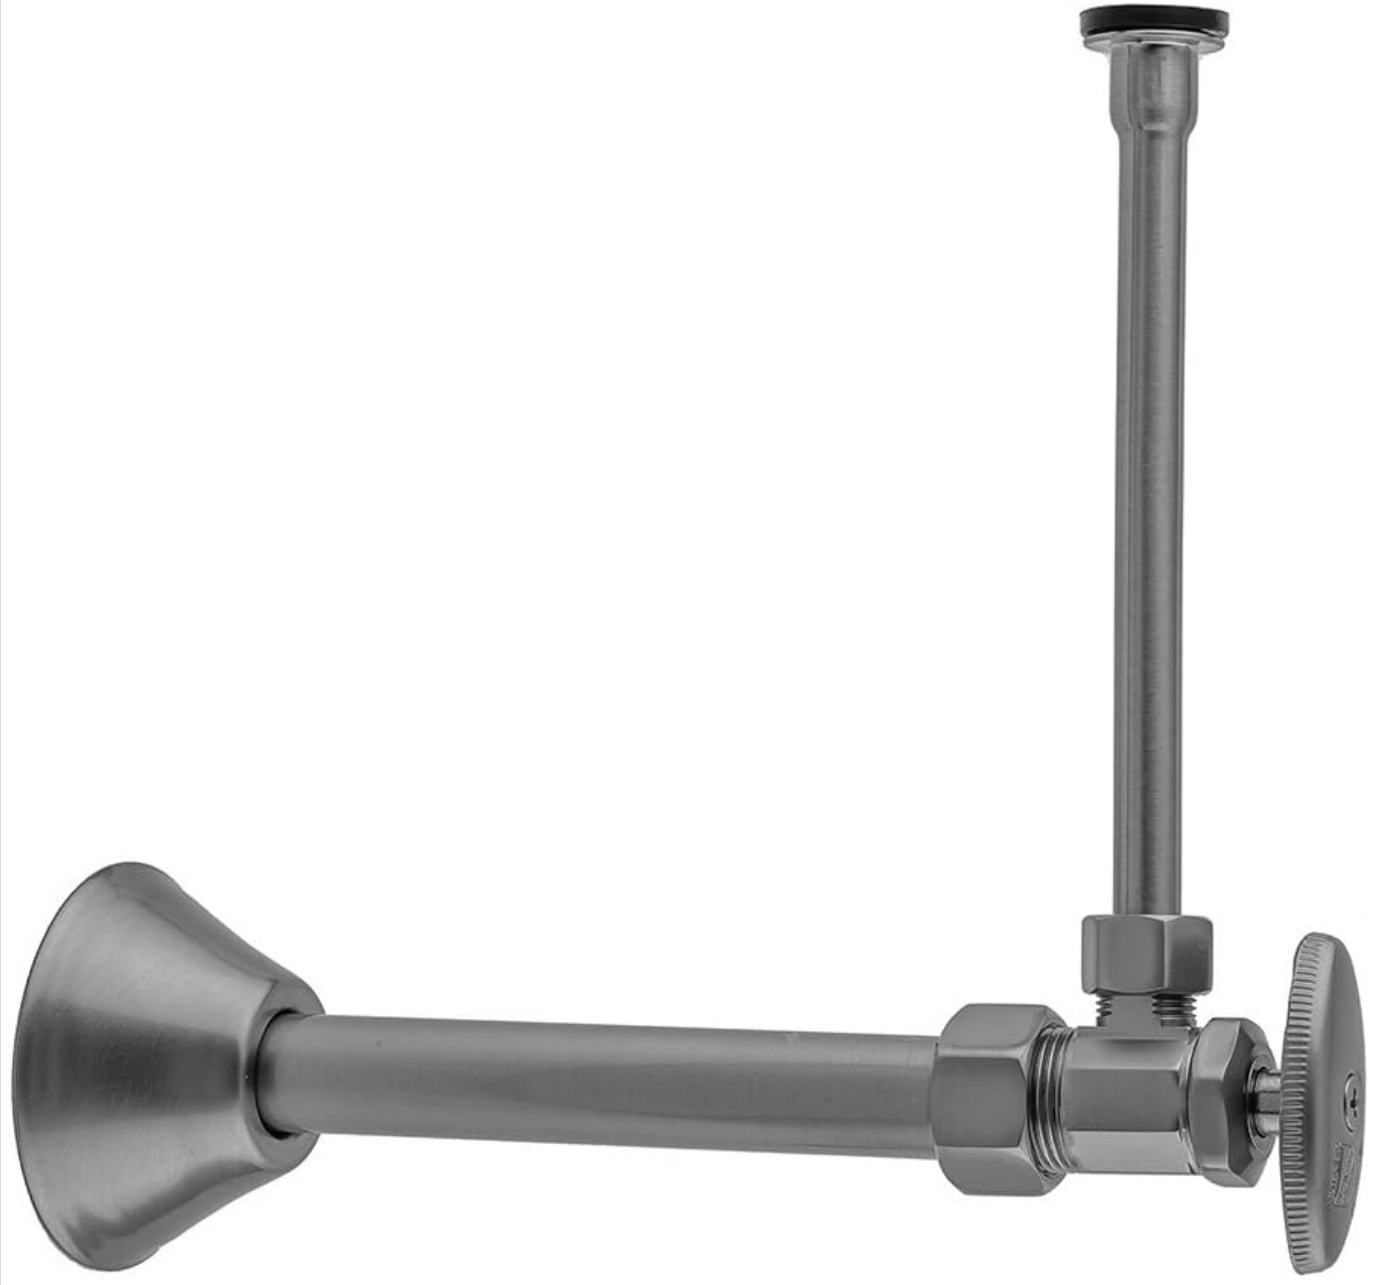


Figure 1: Jaclo 5812-72CT-PN Angle Compress Toilet Kit in Polished Nickel finish. This image shows the main components including the angle stop valve, the compression tube, and the decorative escutcheon.

The Jaclo 5812-72CT-PN kit includes the necessary components for a secure and reliable connection. Key features include:

- Angle stop valve for water flow control.
- Compression tube for connection to the toilet fill valve.
- Durable Polished Nickel finish.
- Designed for 5/8" x 3/8" connections.

Specifications

Attribute	Detail
Model Number	5812-72CT-PN
Manufacturer	Standard Plumbing Supply

Item Weight	10.2 ounces
Product Dimensions	20 x 2.25 x 0.5 inches
Size	5/8" x 3/8"
Color	Polished Nickel
Item Package Quantity	1
Batteries Required	No
Country of Origin	United States

Setup and Installation

Important: Before beginning installation, ensure the main water supply to the area is turned off. It is recommended to have a bucket and towels ready to catch any residual water.

1. **Prepare the Area:** Clear the space around the toilet's water inlet.
2. **Turn Off Water Supply:** Locate the main water shut-off valve for your home or the specific shut-off valve for the toilet. Turn it clockwise until the water flow stops completely.
3. **Drain Residual Water:** Flush the toilet to drain the tank and bowl. Hold the flush handle down to ensure as much water as possible is removed.
4. **Remove Old Supply Line (if applicable):** If replacing an existing supply line, use an adjustable wrench to carefully disconnect it from both the toilet fill valve and the wall stop valve.
5. **Install the Angle Stop Valve:**
    - Apply thread sealant tape (Teflon tape) clockwise around the threaded pipe coming from the wall.
    - Thread the Jaclo angle stop valve onto the pipe by hand, then tighten with an adjustable wrench. Do not overtighten.
6. **Connect the CVR Tube to the Toilet:**
    - Ensure the compression nut and ferrule are correctly positioned on the CVR tube.
    - Connect the upper end of the CVR tube to the toilet fill valve inlet. Hand-tighten the nut, then use a wrench for a final snug turn.
7. **Connect the CVR Tube to the Angle Stop Valve:**
    - Connect the lower end of the CVR tube to the outlet of the newly installed angle stop valve. Hand-tighten the nut, then use a wrench for a final snug turn.
8. **Check for Leaks:** Slowly turn the main water supply back on. Open the angle stop valve by turning its handle counter-clockwise. Carefully inspect all connections for any signs of leaks. Tighten connections slightly if leaks are observed.
9. **Test Operation:** Flush the toilet several times to ensure proper filling and operation.

Note: Professional installation is recommended if you are unsure about any steps.

Operating Instructions

The Jaclo Angle Compress Toilet Kit is primarily a static component once installed, designed to provide a reliable water connection. Its main operational feature is the angle stop valve.

- **Turning Water On:** To allow water flow to the toilet, turn the handle of the angle stop valve counter-clockwise until it stops.
- **Turning Water Off:** To shut off the water supply to the toilet (e.g., for repairs or maintenance), turn the handle of the angle stop valve clockwise until it stops. This will isolate the toilet from the main water supply without affecting other fixtures.

Maintenance

Regular maintenance of your Jaclo Angle Compress Toilet Kit will ensure its longevity and reliable performance.

- **Periodic Inspection:** Periodically check all connections for any signs of leaks, corrosion, or wear. It is recommended to do this at least once a year.
- **Cleaning:** The Polished Nickel finish can be cleaned with a soft cloth and mild, non-abrasive cleaner. Avoid harsh chemicals or abrasive pads, as these can damage the finish.
- **Valve Exercise:** If the angle stop valve is rarely used, it is good practice to turn it off and on completely once or twice a year. This helps prevent mineral buildup and keeps the valve operating smoothly.
- **Leak Repair:** If a minor leak is detected at a connection point, try gently tightening the nut with a wrench. If the leak persists, the compression fitting or the supply line itself may need to be replaced.

Troubleshooting

This section addresses common issues you might encounter with your Jaclo Angle Compress Toilet Kit.

Problem	Possible Cause	Solution
Water leak at connection points.	Loose connection, damaged compression fitting, or insufficient thread sealant.	Turn off water supply. Gently tighten the nuts. If leak persists, disassemble, inspect compression ring/ferrule for damage, reapply thread sealant tape, and reassemble. Replace parts if damaged.
No water flow to toilet after installation.	Angle stop valve is closed, main water supply is off, or blockage in the line.	Ensure the angle stop valve handle is fully open (counter-clockwise). Check if the main water supply to the house is on. Inspect for kinks in the supply line or debris in the valve.
Valve handle is stiff or difficult to turn.	Mineral buildup or lack of use.	Gently work the handle back and forth to loosen mineral deposits. If it remains stiff, the valve may need to be replaced.

If you are unable to resolve an issue, contact a qualified plumber.

Warranty and Support

For information regarding warranty coverage and customer support for your Jaclo product, please refer to the documentation provided at the time of purchase or visit the official Jaclo website. Keep your purchase receipt as proof of purchase.
For technical assistance or replacement parts, please contact Jaclo customer service directly. Contact information can typically be found on the manufacturer's website or on the product packaging.

© 2024 Jaclo. All rights reserved. This manual is for informational purposes only.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0141F3XXA

More documents and user manuals: **https://manuals.plus/**