

[Manuals.plus](#) /

› [JOMAA](#) /

› JOMAA Ergonomic Wireless Trackball Mouse User Manual

JOMAA JOMAA Ergonomic Wireless Trackball Mouse

JOMAA Ergonomic Wireless Trackball Mouse User Manual

Model: JOMAA Ergonomic Wireless Trackball Mouse (Black)

Brand: JOMAA

INTRODUCTION



Image: The JOMAA Ergonomic Wireless Trackball Mouse, showcasing its design and illuminated base.

Thank you for choosing the JOMAA Ergonomic Wireless Trackball Mouse. This advanced tri-mode mouse is designed for enhanced productivity and comfort, offering seamless connectivity across multiple devices and precise control. With its ergonomic design, customizable buttons, and adjustable DPI settings, it provides a superior user experience for various applications, from office tasks to graphic design.

Key features include:

- Tri-mode wireless connection (2x Bluetooth, 1x 2.4GHz USB Receiver)
- 5 Adjustable DPI levels (800/1200/1600/2400/4800 DPI)
- 7 Programmable Buttons for customized functions
- Ergonomic semi-vertical grip with adjustable angles (0° and 18°)
- Rechargeable built-in lithium battery
- Approximately 16.8 million color RGB illumination

SETUP

Charging the Mouse

Before first use, it is recommended to fully charge the mouse. The JOMAA Trackball Mouse features a built-in 730 mAh lithium battery.

Built-in Lithium Tri-cell Battery

Enjoy continuous use with the rechargeable battery, saying goodbye to frequent battery depletion worries.

Larger capacity means longer usage time, reducing the need for frequent replacements. Engineered with precision and featuring NTC thermal protection for safe, eco-friendly recharging.



730 mAh



Charging Prompt:

The battery status indicator is always on during charging, and off when the battery is fully charged

Low Battery Prompt:

When you use the mouse, the 2.4GHz indicator or the Bluetooth indicator will flash quickly once every other second.

2.4GHz Light



Bluetooth 1 Light



Bluetooth 2 Light



Image: The JOMAA Trackball Mouse connected via USB for charging, highlighting its 730 mAh battery capacity.

- Connect the mouse to a USB power source using the provided charging cable.
- The battery status indicator light will be on during charging.
- The indicator light will turn off when the battery is fully charged.
- When the battery is low, the 2.4GHz indicator or the Bluetooth indicator will flash quickly every other second.

Connecting the Mouse (Tri-Mode)

The JOMAA Trackball Mouse supports three connection modes: two Bluetooth channels (BT1, BT2) and one 2.4GHz USB receiver channel. You can switch between these modes to control up to three different devices.

Multi-functional Integrated Mouse

More powerful and reliable, recommended for office tasks, graphic design, and similar applications



Comfortable Grip



Configurable
Memory Function



3D Trackball



Bluetooth Mode



2.4G Model



Rechargeable
Battery



Customizable Drivers



4800DPI



≈**16.8** million
colors of light

Image: An overview of the mouse's multi-functional capabilities, including Bluetooth and 2.4GHz connectivity.

2.4GHz USB Receiver Connection:

1. Locate the USB receiver, usually stored in a compartment on the underside of the mouse.
2. Plug the USB receiver into an available USB port on your computer.
3. Turn on the mouse. The mouse should automatically connect to your computer.
4. Ensure the mouse is set to the 2.4G mode (indicated by the corresponding light).

Bluetooth Connection (BT1 / BT2):

1. Turn on the mouse.
2. Switch the mouse to either BT1 or BT2 mode using the mode switch button on the mouse. The corresponding Bluetooth indicator light will flash.
3. On your device (PC, Laptop, Mac, etc.), go to Bluetooth settings.
4. Search for new Bluetooth devices.
5. Select "JOMAA Trackball Mouse" (or similar name) from the list of available devices to pair.
6. Once paired, the Bluetooth indicator light on the mouse will become solid.
7. Repeat for the second Bluetooth channel (BT2) if connecting to another device.

To switch between connected devices, simply press the mode switch button on the mouse to cycle through 2.4G, BT1, and BT2.

OPERATING INSTRUCTIONS

DPI Adjustment

The mouse features 5 adjustable DPI levels: 800, 1200, 1600, 2400, and 4800. You can change the cursor sensitivity to suit your preference and task requirements.

- Locate the DPI switch button on the mouse (refer to the diagram in the manual for exact location).
- Press the DPI button to cycle through the available DPI settings. The indicator light may change or flash to indicate the current DPI level.

Programmable Buttons

The JOMAA Trackball Mouse is equipped with 7 programmable buttons, allowing you to customize their functions for enhanced workflow efficiency.

- To customize button functions, please refer to the attached software manual or download the dedicated software from the official JOMAA website.
- Install the software on your computer and follow the on-screen instructions to assign desired actions to each programmable button.

Ergonomic Design and Adjustable Angle

This mouse is designed with a semi-vertical grip to promote a more natural wrist posture, reducing strain during prolonged use.

Semi-vertical Grip Design

Ergonomically crafted for a more relaxed grip posture. It ensures wrist protection and reduces fatigue during prolonged use.

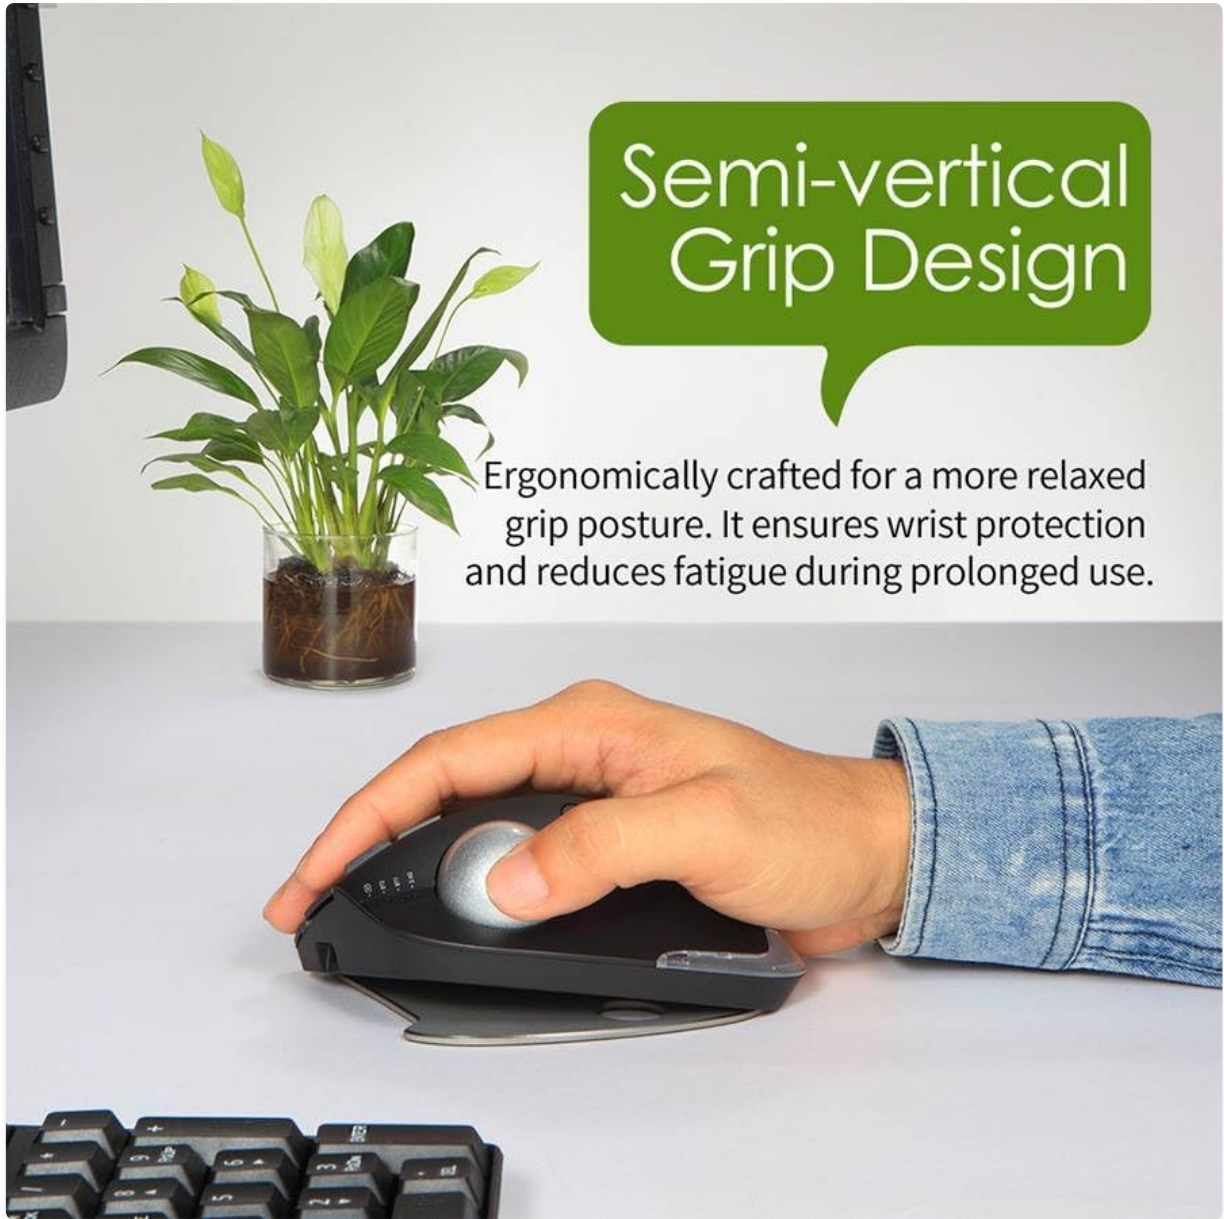


Image: A hand demonstrating the ergonomic semi-vertical grip of the JOMAA Trackball Mouse.

Switch effortlessly between 0° and 18° angles

catering to user preferences



Aluminum alloy detachable base with a magnetic structure.
Changing the angle requires only a gentle wrist pressure.

Image: Comparison of the mouse at 0° and 18° angles, showcasing the magnetic detachable base.

- The mouse comes with an aluminum alloy detachable base with a magnetic structure.
- Gently apply wrist pressure to adjust the angle between 0° and 18° to find your most comfortable working posture.

RGB Illumination

The mouse features approximately 16.8 million color RGB lighting effects to enhance your workspace aesthetics.

Approximately 16.8 Million Color Illumination

Mesmerizing RGB lighting effects with a dedicated button, allowing users to freely switch between colors. Enhances the gaming ambiance and visual appeal.



Image: The JOMAA Trackball Mouse illuminated with colorful RGB lighting.

- A dedicated button on the mouse allows you to freely switch between different lighting colors and effects.

MAINTENANCE

Trackball Cleaning

Regular cleaning of the trackball ensures smooth and precise movement.

Trackball Maintenance Guide

Removing and cleaning the trackball ensures smoother movement.



Step 1:

Push the trackball out of its socket from the circular hole at the mouse's base.



Step 2:

Extract the trackball and gently clean the trackball groove using a cotton cloth.



Step 3:

Place the trackball back into the mouse.

* For cleaning the ball's surface, a gentle wipe with water is sufficient. Allow it to air dry naturally and refrain from using chemical agents!

Image: Step-by-step instructions for cleaning the trackball.

1. **Step 1:** Push the trackball out of its socket from the circular hole at the mouse's base.
2. **Step 2:** Extract the trackball and gently clean the trackball groove using a cotton cloth.
3. **Step 3:** Place the trackball back into the mouse.

Note: For cleaning the ball's surface, a gentle wipe with water is sufficient. Allow it to air dry naturally and refrain from using chemical agents.

Battery Care

- Avoid fully discharging the battery frequently.
- Charge the mouse using a standard USB power adapter or computer USB port.
- If storing the mouse for an extended period, charge it to about 50% to preserve battery health.

TROUBLESHOOTING

Problem	Possible Cause	Solution
---------	----------------	----------

Problem	Possible Cause	Solution
Mouse not responding / not pairing	Low battery Incorrect connection mode selected USB receiver not properly connected (for 2.4GHz) Bluetooth not enabled on device or pairing failed Interference	Charge the mouse fully. Ensure the mouse is switched to the correct mode (2.4G, BT1, or BT2). For 2.4GHz, try plugging the USB receiver into a different USB port. For Bluetooth, ensure Bluetooth is enabled on your device and re-attempt pairing. Remove previous pairings if necessary. Move the mouse closer to the receiver/device.
Erratic cursor movement	Dirty trackball or sensor Low battery Surface interference	Clean the trackball and its groove as described in the Maintenance section. Charge the mouse. Ensure the mouse is used on a clean, non-reflective surface.
Buttons not working	Software issue (for programmable buttons) Hardware malfunction	Restart your computer. Reinstall or update the mouse's customization software. Test the mouse on another computer to rule out system-specific issues.

SPECIFICATIONS

Feature	Detail
Brand	JOMAA
Model	Ergonomic Wireless Trackball Mouse
Connectivity Technology	Bluetooth, 2.4GHz USB
Movement Detection Technology	Trackball
DPI Levels	800 / 1200 / 1600 / 2400 / 4800
Programmable Buttons	7
Battery Type	1 Lithium Ion battery (included)
Battery Capacity	730 mAh (approx.)
Item Weight	13.4 ounces
Package Dimensions	5.94 x 4.29 x 2.64 inches
Color	BLACK
Country of Origin	China

WARRANTY AND SUPPORT

JOMAA products are manufactured to the highest quality standards. For information regarding warranty coverage, technical support, or service inquiries, please visit the official JOMAA website or contact their customer service.

Official JOMAA Store: [JOMAA Store on Amazon](#)