

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [Delta](#) /

› [Delta RP80522 Replacement Hose Assembly User Manual](#)

Delta RP80522

Delta RP80522 Replacement Hose Assembly

User Manual

Model: RP80522 | Brand: Delta

INTRODUCTION

This manual provides detailed instructions for the installation, maintenance, and general use of the Delta RP80522 Replacement Hose Assembly. This product is designed to be a direct replacement part for compatible Delta faucets, ensuring continued optimal performance.

PRODUCT OVERVIEW

The Delta RP80522 is a genuine replacement hose assembly, crafted for durability and ease of installation. It is made from robust plastic and is designed to fit various Delta faucet models.

Key Features:

- **Durable Material:** Crafted from robust Plastic for long-lasting performance.
- **Easy Replacement:** Direct fit for Delta faucets, no specialized tools required.
- **Single Pack:** Includes one hose assembly for immediate use.
- **Versatile Compatibility:** Suitable for various Delta faucet models.



Image: The Delta RP80522 Replacement Hose Assembly, showing the black braided hose with white connectors at each end.

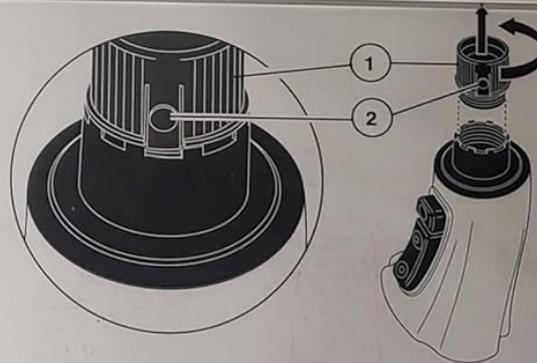


Image: Front view of the Delta RP80522 Replacement Hose Assembly packaging, displaying the Delta logo and "Genuine Parts" branding. The hose is visible through the clear plastic.

INSTALLATION INSTRUCTIONS

Follow these steps to replace your old hose assembly with the Delta RP80522:

1. **Preparation:** Ensure the water supply to the faucet is turned off before beginning the installation process.
2. **Remove Old Hose (with locking nut):** If a locking nut (1) is present on your wand assembly, remove the hose from the wand assembly by pressing the snap (2) and rotating the nut counter-clockwise.
3. **Remove Old Hose (without locking nut):** If the design shown above is not present, simply rotate the nut counter-clockwise to remove the hose.
4. **Install New Hose:** When installing the replacement hose, be sure to tighten the hose nut hand tight.
5. **Test:** Turn the water supply back on and check for any leaks.



If locking nut (1) is present on your wand assembly, remove the hose from the wand assembly by pressing the snap (2) and rotate the nut counter-clockwise. When installing the replacement hose, be sure to tighten hose nut hand tight.

If the design shown above is not present, then simply rotate nut counter-clockwise to remove hose.

Si la tuerca de bloqueo (1) está presente en el conjunto de mango tubular, quite la manguera del conjunto de mango tubular presionando el broche de presión (2) y gire la tuerca en sentido antihorario. Al instalar la manguera de repuesto, asegúrese de apretar la tuerca de la manguera con fuerza de la mano.

Si el diseño mostrado arriba no está presente, entonces basta con girar la tuerca en sentido antihorario para quitar la manguera.

Printed in U.S.A.

Impreso en IEE.UU.



©2021 Delta Faucet Company
A Division of Masco Corporation of Indiana
3441 Ridgecrest Road Extended, Jackson, TN 38305
Assembled in US with domestic and foreign components.

111082 Rev. A

7/12/2021

1.800.345.3358
www.deltafaucet.com

Image: Back view of the Delta RP80522 packaging, showing a diagram illustrating the removal process of the old hose assembly, specifically detailing the locking nut (1) and snap (2) mechanism.

Once installed, the Delta RP80522 Replacement Hose Assembly operates as part of your faucet system. Ensure the hose moves freely and does not kink during use. Avoid excessive pulling or twisting that could damage the hose or its connections.

MAINTENANCE

To ensure the longevity and proper function of your Delta RP80522 Replacement Hose Assembly:

- **Regular Inspection:** Periodically check the hose for any signs of wear, kinks, or leaks.
- **Cleaning:** Wipe the exterior of the hose with a soft, damp cloth. Avoid abrasive cleaners that could damage the plastic material.
- **Connection Check:** Ensure the connections remain hand-tight to prevent leaks. Do not overtighten.

TROUBLESHOOTING

If you encounter issues with your Delta RP80522 Replacement Hose Assembly, consider the following:

- **Leaks at Connection Points:**
 - Ensure the hose nuts are hand-tight.
 - Check if the rubber washers or O-rings at the connections are properly seated and not damaged.
- **Reduced Water Flow:**
 - Verify that the hose is not kinked or obstructed.
 - Check the faucet's aerator for mineral buildup that might be restricting flow.
- **Hose Does Not Retract/Extend Smoothly:**
 - Ensure there are no obstructions under the sink preventing the hose from moving freely.
 - Check the weight attached to the hose (if applicable to your faucet model) to ensure it's positioned correctly.

If problems persist, please refer to the Warranty and Support section for contact information.

SPECIFICATIONS

Attribute	Detail
Brand	Delta
Model Number	RP80522
Part Number	RP80522
Item Weight	0.18 Pounds (2.88 ounces)

Product Dimensions	12 x 9 x 0.5 inches
Item Package Quantity	1
Material	Plastic
UPC	034449798709
Date First Available	February 17, 2016

WARRANTY AND SUPPORT

The Delta RP80522 Replacement Hose Assembly is backed by Delta's reliable **Limited Lifetime Warranty**. This warranty covers defects in material and manufacturing for the original consumer purchaser.

For warranty claims, technical assistance, or further inquiries, please contact Delta Faucet customer support:

- **Phone:** 1-800-345-3358 (as seen on packaging)
- **Online:** Visit the [Delta Store on Amazon](#) or the official Delta Faucet website.

Please have your product model number (RP80522) and proof of purchase ready when contacting support.

© 2024 Delta Faucet Company. All rights reserved.

This manual is for informational purposes only. Delta Faucet Company is not responsible for any damages or injuries resulting from improper installation or use of this product.