

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

- › [Seco-Larm](#) /
- › [Seco-Larm Enforcer Electric Door Strike SD-995A-A1Q User Manual](#)

## Seco-Larm SD-995A-A1Q

# Seco-Larm Enforcer Electric Door Strike SD-995A-A1Q User Manual

## 1. INTRODUCTION

The Seco-Larm Enforcer Electric Door Strike SD-995A-A1Q is designed for secure access control applications, particularly where installation challenges exist. This fail-secure electric door strike is suitable for both metal and wooden doors and features a reversible design for right- or left-handed operation. Its primary function is to secure a door and release it electronically when power is applied (or removed, depending on wiring for fail-secure operation).

## 2. KEY FEATURES

- **Horizontal Keeper Adjustment:** A 1/4-inch (6mm) horizontal keeper adjustment feature reduces installation difficulties, accommodating warped doors or varying latch bolt sizes.
- **Versatile Compatibility:** Designed to fit both right- or left-handed metal or wooden doors.
- **Compact Design:** Miniature lock body for easier installation in various door frames.
- **Durable Construction:** Features a stainless-steel ANSI faceplate and corrosion-resistant case and moving parts for longevity.
- **Fail-Secure Operation:** The door remains locked during a power outage, ensuring security. This model does not support fail-safe operation.
- **High Durability:** Tested to 500,000 cycles for reliable performance.

## 3. PACKAGE CONTENTS

Verify that all items are present in the package:

- Electric Door Strike (SD-995A-A1Q)
- (2) Mounting Tabs
- (2) Machine Screws (narrow)
- Mounting Plate
- Mounting Template
- (2) Wood Screws

- (4) Machine Screws
- (2) Black Anchor Nuts
- Instruction Manual (this document)

## 4. SETUP AND INSTALLATION

---

Proper installation is crucial for the reliable operation of the electric door strike. It is recommended that installation be performed by a qualified technician.

### 4.1 Pre-Installation Check

- Ensure the door and frame are structurally sound.
- Confirm the door's handing (right or left) and swing direction. The strike's reversible design accommodates both.
- Verify the power supply meets the technical specifications (8~16 VAC/12VDC).

### 4.2 Installation Steps

1. **Prepare the Door Frame:** Use the provided mounting template to mark and cut the necessary opening in the door frame. The miniature lock body facilitates this process.
2. **Position the Strike:** Insert the electric door strike into the prepared opening. Ensure it is flush with the door frame.
3. **Adjust the Keeper:** Utilize the 1/4-inch horizontal keeper adjustment to align the strike with the door's latch bolt. This is particularly useful for doors with slight misalignments or warped frames.
4. **Secure the Strike:** Use the appropriate mounting tabs, machine screws, and wood screws from the package contents to firmly secure the strike to the door frame.
5. **Wiring:** Connect the power supply wires to the strike's screw terminals. Ensure correct polarity for DC power. This unit is designed for fail-secure operation, meaning it will lock when power is removed.
6. **Test Operation:** After installation and wiring, test the door strike's functionality with the door closed and open to ensure proper latching and release.



*Image showing the Seco-Larm Enforcer Electric Door Strike, highlighting its faceplate and internal mechanism. The horizontal adjustment feature allows for precise alignment with the door's latch bolt.*

## 5. OPERATION

The Seco-Larm Enforcer Electric Door Strike SD-995A-A1Q operates in **fail-secure** mode. This means that in the event of a power failure, the door strike will remain locked, maintaining security. To unlock the door, power must be applied to the strike, which retracts the keeper, allowing the door to open. When power is removed, the keeper extends, securing the door.

- **Normal Operation:** When the access control system (e.g., keypad, card reader, intercom) sends a signal, power is applied to the strike, releasing the door.
- **Power Outage:** The door remains locked, preventing unauthorized entry.

**Note:** This model does not support fail-safe operation, where the door would unlock during a power outage.

## 6. MAINTENANCE

The Seco-Larm Enforcer Electric Door Strike SD-995A-A1Q is designed for minimal maintenance. Regular inspection of the strike and surrounding door hardware is recommended to ensure proper function and alignment.

- **Cleaning:** Keep the faceplate and keeper area clean from dust and debris. Use a soft, dry cloth. Avoid abrasive cleaners.
- **Alignment Check:** Periodically check the alignment of the strike with the door's latch bolt. If misalignment occurs, the horizontal keeper adjustment can be used to fine-tune the position.
- **Lubrication:** No routine lubrication is typically required for the internal mechanism.

## 7. TROUBLESHOOTING

If the electric door strike is not functioning as expected, consider the following common issues:

- **Strike Not Releasing:**

- Check power supply: Ensure the correct voltage (8~16 VAC/12VDC) is being supplied and that connections are secure.
- Verify wiring: Confirm that the strike is wired correctly for fail-secure operation.
- Check for obstructions: Ensure no debris is preventing the keeper from retracting.
- Door/latch alignment: The door or latch bolt may be misaligned. Adjust the horizontal keeper or the door/latch as needed.

- **Door Not Latching Securely:**

- Keeper adjustment: The horizontal keeper may be too far retracted or misaligned. Adjust it to ensure proper engagement with the latch bolt.
- Door/frame issues: Check for door sag or frame warping that might prevent proper latching.

- **Intermittent Operation:**

- Loose connections: Inspect all wiring connections for tightness and corrosion.
- Power supply fluctuations: Ensure a stable power source.

For complex issues or if troubleshooting steps do not resolve the problem, contact a qualified security technician or Seco-Larm technical support.

## 8. SPECIFICATIONS

Specification	Detail
Model Number	SD-995A-A1Q
Operation	Fail-secure (locks door in power outage)
Operating Voltage	8~16 VAC / 12VDC
Current Draw (16VAC)	800mA
Current Draw (12VDC)	750mA
Max. Latch Throw	5/8-inch (16mm)
Latch Depth	3/4-inch (19mm)
Keeper Depth	2-1/32 inches (16.8mm)
Strike Depth	1-1/2 inches overall (38mm)
Design	Reversible, Non-Handed
Adjustable Keeper	Max. 1/4-inch (6mm)
Operating Temperature	14° to 113°F (-10° to 45°C)
Weight	10.3 ounces (292g)

Specification	Detail
Faceplate Dimensions	4-7/8 x 1-1/4 x 1/8 inches (124 x 32 x 3.2 mm)
Approvals	CE, RoHS
Material	Metal (Stainless Steel exterior finish)
UPC	676544017127

## 9. WARRANTY AND SUPPORT

### 9.1 Warranty Information

The Seco-Larm Enforcer Electric Door Strike SD-995A-A1Q comes with a **3-Year Warranty** from the date of purchase. This warranty covers defects in materials and workmanship under normal use. Please retain your proof of purchase for warranty claims.

### 9.2 Technical Support

For technical assistance, installation questions, or warranty service, please contact Seco-Larm customer support. Contact information can typically be found on the manufacturer's official website or product packaging.

© 2024 Seco-Larm. All rights reserved. Information subject to change without notice.

## Related Documents - SD-995A-A1Q

 <p><b>SECO-LARM®</b> Surface-Mount Electric Rim Strikes Installation Manual</p> <p>SD-998C-D3Q</p> <p>SECO-LARM®</p>	<p><a href="#">SECO-LARM Surface-Mount Electric Rim Strikes Installation Manual</a></p> <p>Installation manual for SECO-LARM Surface-Mount Electric Rim Strikes (SD-998C series). Provides detailed specifications, parts list, installation instructions, wiring diagrams, and troubleshooting guidance for models SD-998C-D3Q, SD-998C-BD3, SD-998C-D3AQ, and SD-998C-BD3A.</p>
 <p><b>ENFORCER</b> Access</p> <p>Soporte de montaje sobre la superficie Support-U (Puerta de vidrio) "Thin" SD-993S-SB</p> <p>SECO-LARM®</p>	<p><a href="#">SECO-LARM SD-993S-SB &amp; SD-993S-UB Surface and Glass Door Mounting Brackets</a></p> <p>Installation guide for SECO-LARM SD-993S-SB surface mount brackets and SD-993S-UB glass door mounting brackets, detailing installation procedures for metal and glass doors.</p>

 <p><b>ENFORCER®</b> Indoor Bluetooth® Single-Gang Keypad Proximity Reader</p> <p>Why? It's the ENFORCER Indoor Bluetooth Keypad Proximity Reader. It's the only one that can be used as a keypad or a proximity reader. It's the only one that can be used as a keypad or a proximity reader. It's the only one that can be used as a keypad or a proximity reader.</p> <p><b>SECO-LARM® SLI™</b></p>	<p><a href="#">ENFORCER SK-B111-PQ Indoor Bluetooth Keypad/Proximity Reader - Installation &amp; Specs</a></p> <p>Installation guide and technical specifications for the SECO-LARM ENFORCER SK-B111-PQ Indoor Bluetooth Single-Gang Keypad and Proximity Reader. Includes wiring diagrams, important notes, and compliance information.</p>
 <p><b>ENFORCER®</b></p> <p><b>SL Access® App User Manual</b> For ENFORCER Bluetooth® Access Controllers</p> <p>Fully integrated Bluetooth® provides streamlined setup and management for managers and easy access for users</p> <p><b>SECO-LARM®</b></p>	<p><a href="#">ENFORCER SL Access App User Manual for Bluetooth Access Controllers</a></p> <p>This user manual guides users through the ENFORCER SL Access app, compatible with ENFORCER Bluetooth Access Controllers. Learn how to set up, manage access, and use features like basic and auto-unlock operations. Includes troubleshooting and settings information.</p>
 <p><b>ENFORCER®</b></p> <p><b>SL Access® App User Manual</b> For ENFORCER Bluetooth® Access Controllers</p> <p>Fully integrated Bluetooth® provides streamlined setup and management for managers and easy access for users</p> <p><b>SECO-LARM®</b></p>	<p><a href="#">ENFORCER SL Access App User Manual for Bluetooth Access Controllers</a></p> <p>User manual for the ENFORCER SL Access app, detailing setup, operation, and troubleshooting for ENFORCER Bluetooth® Access Controllers. Learn how to manage access, use auto-unlock features, and configure settings.</p>
 <p><b>ENFORCER®</b></p> <p><b>Retro-Reflective Photoelectric Beam Sensor</b> E-936-S45RRGQ</p> <p>Installation Manual</p> <p>The E-936-S45RRGQ Retro-Reflective Photoelectric Beam Sensor provides a reliable, long-range, weatherproof solution for access control. It's the only one that can be used as a keypad or a proximity reader. It's the only one that can be used as a keypad or a proximity reader. It's the only one that can be used as a keypad or a proximity reader.</p> <p><b>SECO-LARM®</b></p>	<p><a href="#">ENFORCER E-936-S45RRGQ Retro-Reflective Photoelectric Beam Sensor Installation Manual</a></p> <p>Installation manual for the ENFORCER E-936-S45RRGQ Retro-Reflective Photoelectric Beam Sensor. Features include 45ft range, IP66 weatherproof rating, and UL 325 compliance for gate operators. Provides specifications, installation, adjustment, and troubleshooting guides.</p>

Documents - Seco-Larm – SD-995A-A1Q



[\[pdf\]](#) User Manual Specifications Dimension Guide

Microsoft Word MI SD 995A A1Q 151109 docx bfranklin seco larm image data A Documents 02 Manuals **SD-995A-A1Q** Electric Door Strike with Horizontal Adjustment Manual Features: 1/4 Horizontal keeper adjustment compensates for installation difficulties such as warped doors, different-sized latch bolts, etc. Unique design accommodates both wood and metal doors Fail-secure operation Reversible ... lang:en score:65 filesize: 288.08 K page\_count: 4 document date: 2015-11-09



**SECO-LARM®** Access

**SD-995A-A1Q**  
8-16 VAC/12VDC, Fail-Secure



- 1/4" horizontal keeper adjustment compensates for installation difficulties such as warped doors, different-sized latch bolts, etc.
- Unique design accommodates both wood and metal doors
- Fail-secure operation
- Reversible for right or left-handed doors
- Durable stainless-steel body
- Minimize lock body for easier installation
- Corrosion-resistant case and moving parts
- Complete mounting hardware included
- Some terminals for ease of wiring
- Operating voltage: 8-16VAC/12VDC
- 1,000,000 cycles
- Tensile to 500,000 cycles
- Current draw: 700mA @ 12VDC
- Keeper depth: 7/16" (18.8mm)
- Latch depth: 1/2" (12.7mm)
- Strike depth: 1 1/2" (38.1mm)
- ANSI Passable size: 4 1/2" x 1 1/4" (114.3x31.8mm)
- Optional ANSI Passable SD-995E-21Q (124x32x32.2mm)

The keeper can be easily adjusted horizontally to account for various installation anomalies. To adjust the keeper:

- Loosen the two keeper adjustment screws.
- Slide the keeper horizontally to the desired position.
- Tighten the two keeper adjustment screws.

Model	SD-995A-A1Q
Operation	Fail-Secure
Operating Voltage	8-16 VAC/12VDC
Current	700mA
Stroke	850mA
Weight	10.2oz (289g)
Operating Temperature	14°-131° F (5°-49° C)
Dimensions	1 1/2" x 1 1/4" x 1 1/2" (38.1x31.8x38.1mm)
Max. Latch Throw	1/2" (12.7mm)
Keeper Depth	7/16" (18.8mm)
Strike Depth	1 1/2" (38.1mm)
Design	Reversible Non-Handed
Adjustable Keeper	Max. 1/2" (12.7mm)
Passable Dimensions	4 1/2" x 1 1/4" (114.3x31.8mm)

**Optional Feature SD-995E-21Q**

Model	SD-995E-21Q
Operation	Fail-Secure
Dimensions	124x32x32.2mm
Construction	Stainless Steel

**SECO-LARM**  
16637 Millikan Avenue, Irvine, CA 92614  
Phone: (949) 261-2989 Fax: (949) 261-7328  
Website: www.seco-larm.com Email: sales@seco-larm.com

**SECO-LARM ENGINEER CONSULTANT CCA SLL, JF**  
11000 W. CENTRAL EXPRESSWAY, SUITE 100, IRVINE, CA 92614

[\[pdf\]](#) Dimension Guide

Peter Lin Electric Door Strike with Horizontal Adjustment SECO LARM® U S A Inc 16842 Millikan Avenue Irvine CA 92606 Copyright 2015 © LARM All rights reserved trademarks are the property of PI SD 995A A1Q 1604 seco larm image data Documents 01 Sheets

SECO-LARM Electric Door Strike with Horizontal Adjustment **SD-995A-A1Q** 8-16 VAC/12VDC, Fail-Secure Features: 1/4 Horizontal keeper adjustment compensates for installation difficulties such as warped doors, different-sized latch bolts, etc. Unique design accommodates both wood and metal doors ...  
lang:en score:52 filesize: 288.46 K page\_count: 1 document date: 2015-12-02

**SECO-LARM®** Access

**SD-995A-A1Q**  
8-16 VAC/12VDC, Fail-Secure



- 1/4" horizontal keeper adjustment compensates for installation difficulties such as warped doors, different-sized latch bolts, etc.
- Unique design accommodates both wood and metal doors
- Fail-secure operation
- Reversible for right or left-handed doors
- Durable stainless-steel body
- Minimize lock body for easier installation
- Corrosion-resistant case and moving parts
- Complete mounting hardware included
- Some terminals for ease of wiring
- Operating voltage: 8-16VAC/12VDC
- 1,000,000 cycles
- Tensile to 500,000 cycles
- Current draw: 700mA @ 12VDC
- Keeper depth: 7/16" (18.8mm)
- Latch depth: 1/2" (12.7mm)
- Strike depth: 1 1/2" (38.1mm)
- ANSI Passable size: 4 1/2" x 1 1/4" (114.3x31.8mm)
- Optional ANSI Passable SD-995E-21Q (124x32x32.2mm)

The keeper can be easily adjusted horizontally to account for various installation anomalies. To adjust the keeper:

- Loosen the two keeper adjustment screws.
- Slide the keeper horizontally to the desired position.
- Tighten the two keeper adjustment screws.

Model	SD-995A-A1Q
Operation	Fail-Secure
Operating Voltage	8-16 VAC/12VDC
Current	700mA
Stroke	850mA
Weight	10.2oz (289g)
Operating Temperature	14°-131° F (5°-49° C)
Dimensions	1 1/2" x 1 1/4" x 1 1/2" (38.1x31.8x38.1mm)
Max. Latch Throw	1/2" (12.7mm)
Keeper Depth	7/16" (18.8mm)
Strike Depth	1 1/2" (38.1mm)
Design	Reversible Non-Handed
Adjustable Keeper	Max. 1/2" (12.7mm)
Passable Dimensions	4 1/2" x 1 1/4" (114.3x31.8mm)

**Optional Feature SD-995E-21Q**

Model	SD-995E-21Q
Operation	Fail-Secure
Dimensions	124x32x32.2mm
Construction	Stainless Steel

**SECO-LARM**  
16637 Millikan Avenue, Irvine, CA 92614  
Phone: (949) 261-2989 Fax: (949) 261-7328  
Website: www.seco-larm.com Email: sales@seco-larm.com

**SECO-LARM ENGINEER CONSULTANT CCA SLL, JF**  
11000 W. CENTRAL EXPRESSWAY, SUITE 100, IRVINE, CA 92614

[\[pdf\]](#) Dimension Guide

Peter Lin Electric Door Strike with Horizontal Adjustment SD 995A A1Q surveillance video media lanot attachments customimport |||  
SECO-LARM Electric Door Strike with Horizontal Adjustment **SD-995A-A1Q** 8-16 VAC/12VDC, Fail-Secure Features: 1/4 Horizontal keeper adjustment compensates for installation difficulties such as warped doors, different-sized latch bolts, etc. Unique design accommodates both wood and metal doors ...  
lang:en score:47 filesize: 307.71 K page\_count: 1 document date: 2015-12-02

**SECO-LARM®**

**SD-995C-D3Q**  
No-Cut Door Strike

Manual



**Features:**

- Low profile: Strike is only 1 1/16" deep for use with aluminum frames
- Field adjustable for fail-secure or fail-secure operation
- Mounting tabs included for mounting to hollow aluminum, steel doors
- Reversible non-handed design fits either right hand or left hand doors
- For indoor use only
- NOTE: SD-995C-D3Q has no horizontal or vertical adjustments.
- 5 lbs strength - 1,500-lb (680g)
- DYNAMIC strength - 700-lb (318g)
- 125 4VDC Operating voltage
- Tested to 200,000 cycles (UL Tested), tested to 1,000,000 cycles (Factory Tested)
- Low current draw: 300mA @ 12VDC, 100mA @ 24VDC
- The SD-995C-D3Q is intended to be used with UL Listed Exit Hardware
- The SD-995C-D3Q shall not impair the intended operation of an emergency exit
- The SD-995C-D3Q shall not impair the operation of panic hardware mounted on the door

**SECO-LARM® SLL JF**  

[\[pdf\]](#) User Manual Specifications Dimension Guide

Download Manual Seco Larm SD 995C D3Q No Cut Electric Door Strike manual v 1663713869 cdn shopify s files 1 0141 9617 8998 |||  
SD-995C-D3Q No-Cut Door Strike Manual 43RG Features: Low profile: Strike is only 11/16 deep for u ... ike for Metal Doors Door Strike with Horizontal Adjustable Keeper Universal Door Strike SD-995C **SD-995A-A1Q** Surface-Mount Electric Rim Strike Mini No-Cut Electric Door Strike SD-996C-NUQ Electri...  
lang:en score:47 filesize: 313.16 K page\_count: 4 document date: 2022-09-20

**SECO-LARM®**

SD-995C-D3Q  
No-Cut Door Strike

Manual



**Features:**

- Low profile: Strike is only 1 1/16" deep for use with aluminum frames
- Field selectable for fail-safe or fail-secure operation
- Mounting tabs included for mounting to hollow aluminum & metal doors
- Reversible non-handed design fits either right hand or left hand doors
- For indoor use only
- 5 Lbs strength - 1,500 lb (680g)
- Dynamic strength - 70lb-ft (9.6kg-m)
- 120V VDC Operating voltage
- Tested to 250,000 cycles (UL Test), tested to 1,000,000 cycles (Factory Test)
- Low current draw: 300mA @ 12VDC, 150mA @ 24VDC
- The SD-995C-D3Q is intended to be used with UL Listed Exit Hardware
- The SD-995C-D3Q shall not impair the intended operation of an emergency exit
- The SD-995C-D3Q shall not impair the operation of panic hardware mounted on the door

NOTE: SD-995C-D3Q has no horizontal or vertical adjustments.

SECO-LARM® SLI CE

[pdf] User Manual Specifications Dimension Guide

Microsoft Word MI SD 995C D3Q 180306 docx jhollifield seco larm image data A Documents 02 Manuals SD-995C-D3Q No-Cut Door Strike Manual 43RG Features: Low profile: Strike is only 11/16 deep for u ... ike for Metal Doors Door Strike with Horizontal Adjustable Keeper Universal Door Strike SD-995C **SD-995A-A1Q** Surface-Mount Electric Rim Strike Mini No-Cut Electric Door Strike SD-996C-NUQ Electri...

lang:en score:46 filesize: 311.63 K page\_count: 4 document date: 2019-10-22

**SECO-LARM®**

Access

SD-995A-A1Q  
8-16 VAC/12VDC, Fail-Secure



**Features:**

- 1/4" horizontal keeper adjustment compensates for installation difficulties such as warped doors, different-sized latch bolts, etc.
- Unique design accommodates both wood and metal doors
- Fail-secure operation
- Reversible for right or left-handed doors
- Durable expanded metal
- Minimalist look body for easier installation
- Complete mounting hardware included
- Some terminals for ease of wiring
- Operating voltage: 8-16VAC/12VDC
- 1500V Dielectric strength
- Tested to 500,000 cycles
- Current draw: 750mA @ 12VDC
- Keeper depth: 1/2" (12.7mm)
- Latch depth: 1/2" (12.7mm)
- Strike depth: 1 1/2" (38.1mm)
- ANSI Faceplate lock: 4 1/2" x 1 1/2" x 1/2" (114x38x12.7mm)
- Optional ANSI Faceplate SD-999E-210 (7 1/2" x 1 1/2" x 1/2" (190x38x12.7mm))

The keeper can be easily adjusted horizontally to account for installation anomalies. To adjust the keeper:

1. Loosen the back keeper adjustment screws.
2. Move the keeper horizontally to the desired position.
3. Tighten the two keeper adjustment screws.

Model	SD-995A-A1Q
Operation	Fail-Secure
Operating Voltage	8-16 VAC/12VDC
Current	750mA
Draw	12VDC
Operating Temperature	14F (-10C) to 147F (65C)
Weight	30.2oz (858g)
Max. Door Thickness	1 1/2" (38.1mm)
Strike Depth	1 1/2" (38.1mm)
Design	Fail-Secure Lock
Adjustable Keeper	Max. 1/2" (12.7mm)
Faceplate Dimensions	4 1/2" x 1 1/2" x 1/2" (114x38x12.7mm)

Optional Faceplate SD-999E-210

Model	SD-999E-210
Dimensions	7 1/2" x 1 1/2" x 1/2" (190x38x12.7mm)
Construction	Stainless Steel

SECO-LARM®  
2600 West 10th Street, New York, USA 10008  
Phone: (201) 261-2288 | (800) 362-5888 Fax: (201) 261-1723  
Website: www.seco-larm.com | Email: info@seco-larm.com

SECO-LARM® ENFORCER® COMMUNISTERS, CMA, SLLI, CE

[pdf] Dimension Guide Borchure

Peter Lin Electric Door Strike with Horizontal Adjustment Home Controls To adjust the keeper 1 Loosen two adjustment screws 2 Move horizontally to desired position 3 Retighten keeper SESD995AA1Q Product Information homecontrols homecontrols products s SE SecoLarm SESD995AA1Q Information srslltd AfmBOor8E0SPA F fJg0EGT6Prg90OUw4VmfDld6cq3oXzINxRmfX LN Controls CLICK HERE FOR BROCHURE To keeper Seco Larm SD 995A A1Q Adjustable PSS Store SESD995AA1Q

Information SD brochure homecontrols LNcdn shopify files 1666 9427 brochure 3129087189970961868 ||| SECO-LARM Electric Door Strike with Horizontal Adjustment **SD-995A-A1Q** 8-16 VAC/12VDC, Fail-Secure Features: 1/4 Horizontal keeper adjustment compensates for installation difficulties such as warped doors, different-sized latch bolts, etc. Unique design accommodates both wood and metal doors ...

lang:en score:45 filesize: 288.46 K page\_count: 1 document date: 2015-12-02

**SECO-LARM®**

SD-995C-D3Q  
No-Cut Door Strike

Manual



**Features:**

- Low profile: Strike is only 1 1/16" deep for use with aluminum frames
- Field selectable for fail-safe or fail-secure operation
- Mounting tabs included for mounting to hollow aluminum & metal doors
- Reversible non-handed design fits either right hand or left hand doors
- For indoor use only
- 5 Lbs strength - 1,500 lb (680g)
- Dynamic strength - 70lb-ft (9.6kg-m)
- 120V VDC Operating voltage
- Tested to 250,000 cycles (UL Test), tested to 1,000,000 cycles (Factory Test)
- Low current draw: 300mA @ 12VDC, 150mA @ 24VDC
- The SD-995C-D3Q is intended to be used with UL Listed Exit Hardware
- The SD-995C-D3Q shall not impair the intended operation of an emergency exit
- The SD-995C-D3Q shall not impair the operation of panic hardware mounted on the door

NOTE: SD-995C-D3Q has no horizontal or vertical adjustments.

SECO-LARM® SLI CE

[pdf] User Manual Specifications Dimension Guide

Microsoft Word MI SD 995C D3Q 180306 docx jhollifield SEA Manual Seco Larm No Cut Door Strike Southwest Automated Security southwestautomated product attachment ||| SD-995C-D3Q No-Cut Door Strike Manual 43RG Features: Low profile: Strike is only 11/16 deep for u ... ike for Metal Doors Door Strike with Horizontal Adjustable Keeper Universal Door Strike SD-995C **SD-995A-A1Q** Surface-Mount Electric Rim Strike Mini No-Cut Electric Door Strike SD-996C-NUQ Electri...

lang:en score:44 filesize: 316.24 K page\_count: 4 document date: 2019-10-22



**SECO-LARM®**

SD-995C-D3Q  
No-Cut Door Strike

Manual



**Features:**

- Low profile: Strike is only 1 1/4" deep for use with aluminum frames.
- Field selectable for fail-safe or fail-secure operation.
- Mounting plate included for mounting to hollow aluminum frame doors.
- Reversible non-handed design fits either right-hand or left-hand doors.
- For indoor use only.
- Strike strength - 1,500 lb (680 kg).
- Dynamic strength - 750 lb (340 kg).
- 120 VDC Operating voltage.
- Tested to 250,000 cycles (UL Test), tested to 1000,000 cycles (Factory Test).
- Low current draw: 300mA @ 12VDC, 150mA @ 24VDC.
- The SD-995C-D3Q is intended to be used with UL Listed Exit Hardware.
- The SD-995C-D3Q shall not impair the intended operation of an emergency exit.
- The SD-995C-D3Q shall not impair the operation of panic hardware mounted on the door.

NOTE: SD-995C-D3Q has no horizontal or vertical adjustments.

SECO-LARM® SLI

[pdf] User Manual Specifications Dimension Guide

Microsoft Word MI SD 995C D3Q 180306 docx jhollifield Buy SECO LARM No Cut Door Strike 12 24 VDC Fail safe door unlocks when power is lost or fail secure locSD Mcctv net sites default files product M

SD-995C-D3Q No-Cut Door Strike Manual 43RG Features: Low profile: Strike is only 1 1/16 deep for u ... ike for Metal Doors Door Strike with Horizontal Adjustable Keeper Universal Door Strike SD-995C **SD-995A-A1Q** Surface-Mount Electric Rim Strike Mini No-Cut Electric Door Strike SD-996C-NUQ Electri...

lang:en score:34 filesize: 311.63 K page\_count: 4 document date: 2019-10-22

**ENFORCER**  
July Sales Flyer

Compact, Secure, Anywhere

SALE \$25<sup>00</sup>

Intertek  
Conforms to UL Std. 294

**E-941SA-80Q**

- 12-24VDC Operation
- Low current draw
- 8000 cycle minimum
- Durable mounting bracket for easy installation
- Waterproof for outdoor use (IP67)

For small, minimum security doors including cabinets and drawers



[pdf] Flyer Warranty

July Sales Flyer 240614 Export indd seco larm 2024 07 |||

July Sales Flyer Prices Effective 1-31 July 2024 Compact, Secure, Anywhere SALE 2510 MOQ: 20pcs ... -993B-SS Electric Shear Lock Sale 3230 MOQ: 2pcs Electric Door Strike with Horizontal Adjustment **SD-995A-A1Q** 8-16 VAC/12VDC Durable stainless-steel faceplate Miniature lock body for easier instal...

lang:en score:32 filesize: 6.12 M page\_count: 14 document date: 2024-07-01

**ENFORCER**  
November Sales Flyer

Price Effective 2024 1-30

<p><b>1,200 lb Single-Door Maglocks</b></p> <p>E-941SA-120Q • Anodized stainless housing (316 SS) • Quad-wire 12VDC operation • No neutral operation • Dead-bolt function</p> <p>SALE \$52<sup>00</sup></p>	<p><b>1" A, 7" Brackets for 1,200 lb Series Electromagnetic Locks (Electrol)</b></p> <p>E-941S-112Q1Q • For mounting on existing door • Includes one "C" bracket and one "D" bracket • Includes one plate for easy mounting • Mount to existing frame</p> <p>SALE \$37<sup>00</sup></p>
<p><b>1,200 lb Single-Door Maglocks with Bond Sensor</b></p> <p>E-941SA-112PQ • Same as E-941SA-120Q • Bond sensor included • Bond sensor for monitoring door status</p> <p>SALE \$75<sup>00</sup></p>	<p><b>1,200 lb Single-Door Maglocks with Bond Sensor and Timer</b></p> <p>E-941SA-112TPQ • Anodized stainless housing (316 SS) • Quad-wire 12VDC operation • 10-second delay • Sub-1/16" installation</p> <p>SALE \$83<sup>00</sup></p>
<p><b>1/2" Plate Spacer for 1,200 lb Series Electromagnetic Locks</b></p> <p>E-941S-112PQ Plate spacer</p> <p>SALE \$7<sup>00</sup></p>	<p><b>Glass Door U Bracket for 1,200 lb Series Electromagnetic Locks</b></p> <p>E-941S-112UQ U Bracket for glass doors • Adjustable for 1/2" max gap</p> <p>SALE \$31<sup>00</sup></p>
<p><b>1" Filler Plate for Electromagnetic Locks</b></p> <p>E-941S-112F-G1Q Complete kit: • E-941S-112F-G1Q • E-941S-112F-G1Q • E-941S-112F-G1Q • E-941S-112F-G1Q • E-941S-112F-G1Q</p> <p>SALE \$7<sup>00</sup></p>	<p><b>1" Filler Plate for Electromagnetic Locks</b></p> <p>E-941S-112F-S3Q Complete kit: • E-941S-112F-S3Q • E-941S-112F-S3Q • E-941S-112F-S3Q • E-941S-112F-S3Q • E-941S-112F-S3Q</p> <p>SALE \$9<sup>00</sup></p>
<p><b>True PhotoBeam Sensor for Gates</b></p> <p>E-960-D100Q Range: 10 to 500' (30m) • 120V/50Hz AC, 200mA • Free Cable: 150' (45.7m) • IP65 Weatherproof</p> <p>SALE \$53<sup>00</sup></p>	<p><b>True PhotoBeam with Laser Beam Alignment</b></p> <p>E-960-D100Q Output Range up to 500' (150m) • True PhotoBeam sensor provides precise accuracy, reducing false alarm from false triggering, false alarm</p> <p>SALE \$71<sup>00</sup></p>

[pdf] Flyer

MSF November 241009 Export indd seco larm 2024 11 |||

November Sales Flyer Prices Effective 1-30 November 2024 1,200-lb Single-Door Maglocks E-941SA-120 ... lectric Door Strike with Horizontal Adjustment Low-Profile Door Strike With Horizontal Adjustment **SD-995A-A1Q** 8-16 VAC/12VDC Durable stainless steel faceplate Miniature lock body for easier instal...

lang:en score:32 filesize: 5.88 M page\_count: 13 document date: 2024-11-01



**ENFORCER**  
**FEBRUARY SALES FLYER**  
 Prices effective from February 1st - February 28th, 2023

**Self-Contained Siren/Strobe**

SH-816S-BQ Siren Only SH-816S-SQ Siren/Strobe, Blue SH-816S-SQ/A Siren/Strobe, Amber SH-816S-SQ/C Siren/Strobe, Clear SH-816S-SQ/F Siren/Strobe, Red

- Shatter light can be triggered separately from siren
- 120V standard for residential use
- 24V standard for fire department use
- 100% duty cycle for 24-hour operation
- Mounts directly to wall or to brass corner lock body
- Siren chamber made with stainless steel, clear and white

SH-816S-BQ SH-816S-SQ SH-816S-SQ/A SH-816S-SQ/C SH-816S-SQ/F

Sale \$299 Sale \$399

MSRP \$399 MSRP \$499 MSRP \$399 MSRP \$499 MSRP \$399

**LED Strobe Light, 54 LEDs, 10000 Siren**

SL-101-SQ/B Amber SL-101-SQ/B Blue SL-101-SQ/C Clear SL-101-SQ/F Red

- Operating time over 100,000 hours (over 5.7 years)
- 100% duty cycle
- 100% brightness
- 100% reliability
- 100% durability
- 100% safety

SL-101-SQ/B SL-101-SQ/B SL-101-SQ/C SL-101-SQ/F

Sale \$299

MSRP \$399 MSRP \$499 MSRP \$399 MSRP \$499

**Mini Strobe Siren**

SM-41-T20B Blue Lens SM-41-T20C Red Lens

- Compact design with long operating life
- Mounts to wall or to brass corner lock body
- 100% duty cycle
- 100% brightness
- 100% reliability
- 100% durability
- 100% safety

SM-41-T20B SM-41-T20C

Sale \$199

MSRP \$299 MSRP \$399

**Screen Connect Surface Mount Contact**

SC-41-T20B Blue Lens SC-41-T20C Red Lens

- Compact design with long operating life
- Mounts to wall or to brass corner lock body
- 100% duty cycle
- 100% brightness
- 100% reliability
- 100% durability
- 100% safety

SC-41-T20B SC-41-T20C

Sale \$199

MSRP \$299 MSRP \$399

**Power Supply Charger, 1.5A**

PS-2005-1.5A

- Operates at 120V AC voltage output
- Operates at 12V DC voltage output
- Operates at 1.5A current output

PS-2005-1.5A

Sale \$799

MSRP \$999

**Power Supply Charger, 1.5A**

PS-2005-1.5A

- Operates at 120V AC voltage output
- Operates at 12V DC voltage output
- Operates at 1.5A current output

PS-2005-1.5A

Sale \$799

MSRP \$999

[pdf] Flyer

February Sales Flyer 230130 Index of 2023 02 seco larm |||

Self-Contained Siren/Strobe SH-816S-BQ Siren Only SH-816S-SQ/A Siren/Strobe, Amber SH-816S-SQ/C Siren/Strobe, Clear SH-816S-SQ/F Siren/Strobe, Red

Electric Door Strike with Horizontal Adjustment **SD-995A-A1Q** 8-16 VAC/12VDC

Durable stainless-steel faceplate Miniature lock body for easier installation

lang:en score:32 filesize: 3.05 M page\_count: 9 document date: 2023-01-30

**ENFORCER**  
**FEBRUARY SALES FLYER**  
 Prices effective from February 1st - February 28th, 2023

**Self-Contained Siren/Strobe**

SH-816S-BQ Siren Only SH-816S-SQ Siren/Strobe, Blue SH-816S-SQ/A Siren/Strobe, Amber SH-816S-SQ/C Siren/Strobe, Clear SH-816S-SQ/F Siren/Strobe, Red

- Shatter light can be triggered separately from siren
- 120V standard for residential use
- 24V standard for fire department use
- 100% duty cycle for 24-hour operation
- Mounts directly to wall or to brass corner lock body
- Siren chamber made with stainless steel, clear and white

SH-816S-BQ SH-816S-SQ SH-816S-SQ/A SH-816S-SQ/C SH-816S-SQ/F

Sale \$299 Sale \$399

MSRP \$399 MSRP \$499 MSRP \$399 MSRP \$499 MSRP \$399

**LED Strobe Light, 54 LEDs, 10000 Siren**

SL-101-SQ/B Amber SL-101-SQ/B Blue SL-101-SQ/C Clear SL-101-SQ/F Red

- Operating time over 100,000 hours (over 5.7 years)
- 100% duty cycle
- 100% brightness
- 100% reliability
- 100% durability
- 100% safety

SL-101-SQ/B SL-101-SQ/B SL-101-SQ/C SL-101-SQ/F

Sale \$299

MSRP \$399 MSRP \$499 MSRP \$399 MSRP \$499

**Mini Strobe Siren**

SM-41-T20B Blue Lens SM-41-T20C Red Lens

- Compact design with long operating life
- Mounts to wall or to brass corner lock body
- 100% duty cycle
- 100% brightness
- 100% reliability
- 100% durability
- 100% safety

SM-41-T20B SM-41-T20C

Sale \$199

MSRP \$299 MSRP \$399

**Screen Connect Surface Mount Contact**

SC-41-T20B Blue Lens SC-41-T20C Red Lens

- Compact design with long operating life
- Mounts to wall or to brass corner lock body
- 100% duty cycle
- 100% brightness
- 100% reliability
- 100% durability
- 100% safety

SC-41-T20B SC-41-T20C

Sale \$199

MSRP \$299 MSRP \$399

**Power Supply Charger, 1.5A**

PS-2005-1.5A

- Operates at 120V AC voltage output
- Operates at 12V DC voltage output
- Operates at 1.5A current output

PS-2005-1.5A

Sale \$799

MSRP \$999

**Power Supply Charger, 1.5A**

PS-2005-1.5A

- Operates at 120V AC voltage output
- Operates at 12V DC voltage output
- Operates at 1.5A current output

PS-2005-1.5A

Sale \$799

MSRP \$999

[pdf] Flyer

February Sales Flyer 230202 Export index of 2023 02 seco larm |||

Self-Contained Siren/Strobe SH-816S-BQ Siren Only SH-816S-SQ/A Siren/Strobe, Amber SH-816S-SQ/C Siren/Strobe, Clear SH-816S-SQ/F Siren/Strobe, Red

Electric Door Strike with Horizontal Adjustment **SD-995A-A1Q** 8-16 VAC/12VDC

Durable stainless-steel faceplate Miniature lock body for easier installation

lang:en score:31 filesize: 1.83 M page\_count: 9 document date: 2023-02-02

**SECO-LARM**

**SD-995A-A1Q**  
 Electric Door Strike  
 with Horizontal Adjustment  
 Manual



**Features:**

- 1/4" horizontal keeper adjustment compensates for installation difficulties such as warped doors, off-levelness, etc.
- Unique design accommodates both wood and metal doors
- Full-secure operation
- Reversible for right or left-handed doors
- Durable stainless-steel faceplate
- Miniature lock body for easier installation
- Corrosion-resistant case and mounting parts
- Complete mounting hardware included
- Some terminals for ease of wiring
- Operating voltage: 8-16VAC/12VDC
- 1,000-lb (453kg) Jaw strength
- Tested to 500,000 cycles
- Current draw: 750mA@12VDC
- Gauge depth: 7/16" (11.6mm)
- Latch depth: 1/2" (12.7mm)
- Stroke depth: 1/2" (12.7mm)
- ANSI/FPM/UL: 410/11V/1/4"
- (124x20x2.2 mm)
- Optional ANSI/FPM/UL: SD-995RE-21Q
- 7/16"x1/2"x1/4" (20.3x12.7x6.3 mm)

**SECO-LARM** **SL** **CE**

[pdf] User Manual

Microsoft Word MI SD 995A A1Q 151109 docx eddie Download Manual Seco Larm Reversible Electric Door Strike W Horizontal Ad manual v 1663797083 cdn shopify s files 1 0141 9617 8998 |||


lang:en score:30 filesize: 4.17 M page\_count: 4 document date: 2022-09-21



[\[pdf\]](#) User Manual Accessories Catalog

SECO LARM MrkTec Incorporates manual lock unlock cylinder to operate if power is lost turn Control garage doors gates house lights 2017 SLI FullCate 170822 low mrktec 10 Our new completely redesigned website much more intuitive informative and easier use Everything right at your fingertips seco larm image data A Documents 05 Catalogs a Condensed


FULL CATALOG For All Your Security Needs 47 years Wireless Access Sensors Security CCTV and Ac ... operation Includes three faceplates for nearly any type of door Horizontal-Adjustment Door Strike **SD-995A-A1Q** Adjustable keeper to compensate for installation issues Operating voltage: 8-16VAC and...  
lang:en score:28 filesize: 11.16 M page\_count: 128 document date: 2017-08-23

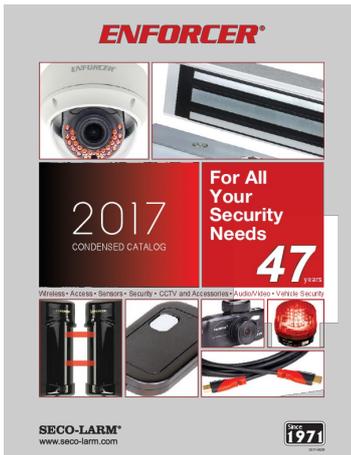

[\[pdf\]](#) Warranty Accessories Catalog

For All Your Security Needs SECO LARM use with door closers to control the release and closing of residential commercial public doors Adjustable armature plate reduces installation 2017 SLI MiniCate 170301 WEB seco larm image data A Documents 05 Catalogs a Condensed


CONDENSED CATALOG For All Your Security Needs 47years Wireless Access Sensors Security CCTV an ... ntal adjustment Metal or wood frame installation Electric Door Strike with Horizontal Adjustment **SD-995A-A1Q** SD-995RE-21Q Fail-secure Operation Optional Faceplate **SD-995A-A1Q** SD-995RE-21Q 1/4 ...  
lang:en score:28 filesize: 5.95 M page\_count: 32 document date: 2017-03-02

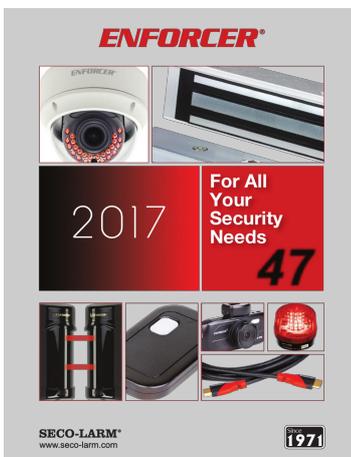

[\[pdf\]](#) Warranty Accessories Catalog


For All Your Security Needs SECO LARM use with door closers to control the release and closing of residential commercial public doors Adjustable armature plate reduces installation 2017 SLI MiniCate 170822 low seco larm image data A Documents 05 Catalogs a Condensed 80

CONDENSED CATALOG For All Your Security Needs 47 years Wireless Access Sensors Security CCTV a ... ntal adjustment Metal or wood frame installation Electric Door Strike with Horizontal Adjustment **SD-995A-A1Q** SD-995RE-21Q Fail-secure Operation Optional Faceplate **SD-995A-A1Q** SD-995RE-21Q 1/4 ...  
lang:en score:28 filesize: 6.23 M page\_count: 32 document date: 2017-08-23

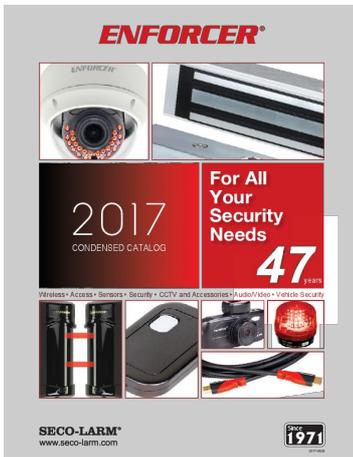

[\[pdf\]](#) Warranty Accessories Catalog

2017 SLI MiniCate 170224 Final Web seco larm image data A Documents 05 Catalogs a Condensed CONDENSED CATALOG For All Your Security Needs 47years Wireless Access Sensors Security CCTV an ... ntal adjustment Metal or wood frame installation Electric Door Strike with Horizontal Adjustment **SD-995A-A1Q** SD-995RE-21Q Fail-secure Operation Optional Faceplate **SD-995A-A1Q** SD-995RE-21Q 1/4 ...  
lang:en score:28 filesize: 5.97 M page\_count: 32 document date: 2017-02-24

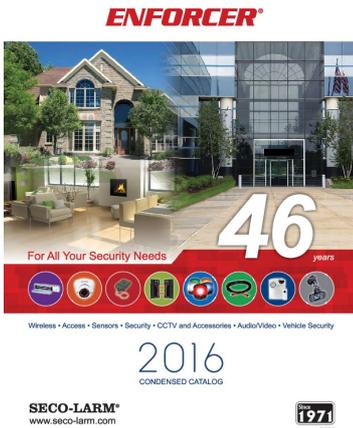


[\[pdf\]](#) Warranty Catalog

2016 SLI MiniCate 160317 indd E 941S 1K5 P Catalog Seco Larm Plate Spacer Mounting Bracket surveillance video media lanot attachments customimport |||  
2016-M04B E-941SA-1200 Standard lock, UL listed E-941SA-1K2PQ Bond sensor, status LED, UL listed E ... ntal adjustment Metal or wood frame installation Electric Door Strike with Horizontal Adjustment **SD-995A-A1Q** SD-995RE-21Q Fail-secure Operation Optional Faceplate **SD-995A-A1Q** SD-995RE-21Q 1/4 ...  
lang:en score:26 filesize: 5.19 M page\_count: 32 document date: 2016-04-04



[\[pdf\]](#) Catalog

2017 SLI MiniCate 170224 SP Final Web seco larm image data A Documents 05 Catalogs a Condensed Para Todas Sus Necesidades De Seguridad CATLOGO CONDENSADO 47aos Inalmbrico Acceso Sensores Se ... de 1,000-lb Consumo de corriente bajo 300mA 12V C.C. Cerraduras elctricas con ajuste horizontal **SD-995A-A1Q** Modo seguro SD-995RE-21Q Placa frontal opcional **SD-995A-A1Q** SD-995RE-21Q Cua arquero...  
lang:es score:26 filesize: 4.67 M page\_count: 32 document date: 2017-02-24

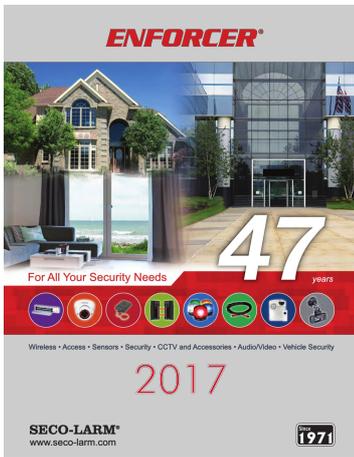

[\[pdf\]](#) User Manual Catalog

For All Your Security Needs FULL CATALOG SECO LARM When it comes to the business side of security is right choice for distributors and dealers around world This true today more than ever Just compare this catalog our Incorporates manual lock unlock cylinder operate if power lost turn Control garage doors gates house lights 2017 SLI FullCate 161215 low seco larm image data A Documents 05 Catalogs b Full

47 2017 FULL CATALOG For All Your Security Needs When it comes to the business side of security, ... SD-994C .....14 SD-994C24 .....14 **SD-995A-A1Q** .....15 SD-995A-D3Q .....17 SD-995C...


lang:en score:26 filesize: 10.45 M page\_count: 128 document date: 2016-12-15



[ENFORCER 2017 Catálogo Condensado: Soluciones Completas de Seguridad](#)

Explore el catálogo condensado 2017 de ENFORCER de SECO-LARM, que ofrece una amplia gama de productos de seguridad, incluyendo control de acceso, CCTV, sistemas inalámbricos, sensores, soluciones antirrobo y de seguridad, audio/video, seguridad autónoma y vehicular.

lang:es score:25 filesize: 4.66 M page\_count: 32 document date: 2017-02-24

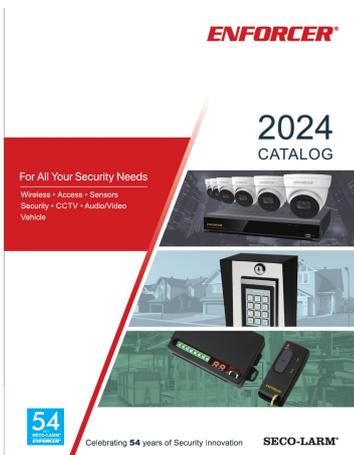


[\[pdf\]](#) Catalog

SECO LARM USA Inc 2024 SLI FullCate 240318 Final seco larm 04 |||

About SECO-LARM SECO-LARM has long been the best choice for distributors and dealers around the wor ... .....22 SD-994C24.....22 **SD-995A-A1Q**.....20 SD-995A-D3Q.....

lang:en score:25 filesize: 78.63 M page\_count: 144 document date: 2024-03-20

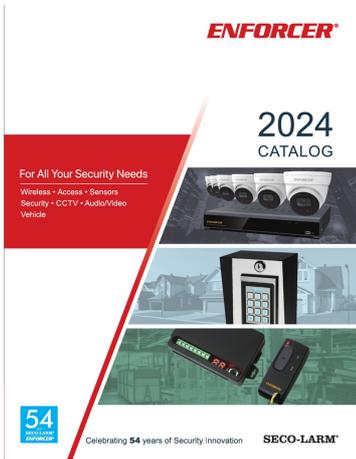

[\[pdf\]](#) Catalog

SECO LARM USA Inc 2024 SLI FullCate 231004 seco larm 2023 10 |||

About SECO-LARM SECO-LARM has long been the best choice for distributors and dealers around the wor ... ..22 SD-

994C24.....22 **SD-995A-**

**A1Q**.....20 SD-995A-D3Q.....

lang:en score:25 filesize: 77.82 M page\_count: 144 document date: 2023-10-19




[\[pdf\]](#) Catalog

Para Todas Sus Necesidades De Seguridad SECO LARM Fuerza de retención 1 200 lb Operación seleccionable 12 o 24V C Sin magnetismo residual Protección contra sobretensiones tipo MOV 2017 SLI MiniCate 170824 SP low seco larm image data A Documents 05 Catalogs a Condensed 80

Para Todas Sus Necesidades De Seguridad CATLOGO CONDENSADO 47 aos Inalmbriico Acceso Sensores S ... de 1,000-lb Consumo de corriente bajo 300mA 12V C.C. Cerraduras elctricas con ajuste horizontal **SD-995A-A1Q** Modo seguro SD-995RE-21Q Placa frontal opcional **SD-995A-A1Q** SD-995RE-21Q Cua arquero...

lang:es score:25 filesize: 6.08 M page\_count: 32 document date: 2017-08-24

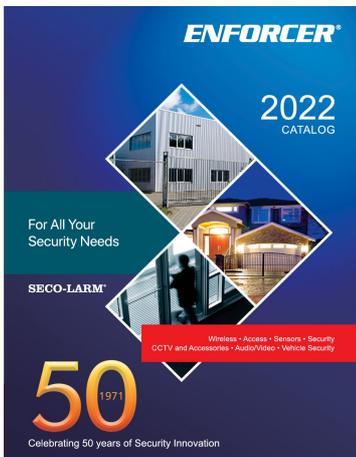

[\[pdf\]](#) Catalog


Page Not Found SECO LARM USA Inc 2022 SLI FullCate 210908 web dev seco larm 05 |||

About SECO-LARM SECO-LARM has long been the best choice for distributors and dealers around the wor ... ..15 SD-

994C24.....15 **SD-995A-**

**A1Q**.....16 SD-995A-D3Q.....

lang:en score:25 filesize: 34.11 M page\_count: 132 document date: 2022-03-30

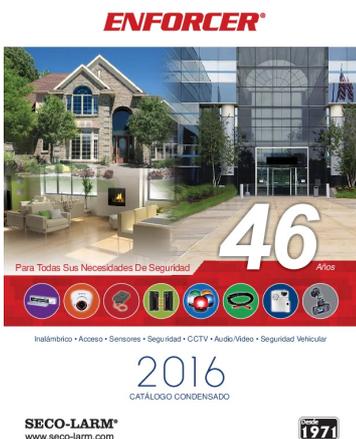


[\[pdf\]](#) Catalog

2016 SLI MiniCate SP 1603 Hi jchan Para Todas Sus Necesidades De Seguridad SECO LARM Fuerza de retención 1 200 lb Operación seleccionable 12 o 24V C Sin magnetismo residual Protección contra sobretensiones tipo MOV Low seco larm image data A Documents 05 Catalogs a Condensed 80


Para Todas Sus Necesidades De Seguridad Aos Inalmbriico Acceso Sensores Seguridad CCTV Audio/V ... de 1,500-lb Consumo de corriente bajo 250mA 12V C.C. Cerraduras elctricas con ajuste horizontal **SD-995A-A1Q** Modo seguro SD-995RE-21Q Placa frontal opcional **SD-995A-A1Q** SD-995RE-21Q Cua arquero...

lang:es score:25 filesize: 3.02 M page\_count: 32 document date: 2016-05-30

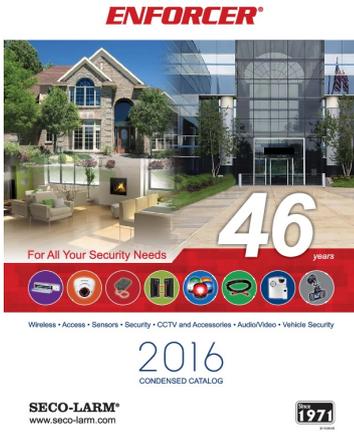

[\[pdf\]](#) Warranty Catalog

2016 SLI MiniCate 160504 Hi jchan E 946FC 1K2SQ Face and surface mount weldable bracket Weld or bolt brackets directly to the gate 1 200 lb Holding force Brackets are corrosion resistant zinc plated KDYHDEODFN Low seco larm image data A Documents 05 Catalogs a Condensed 2016-M04B E-941SA-1200 Standard lock, UL listed E-941SA-1K2PQ Bond sensor, status LED, UL listed E ... ntal adjustment Metal or wood frame installation Electric Door Strike with Horizontal Adjustment **SD-995A-A1Q** SD-995RE-21Q Fail-secure Operation Optional Faceplate **SD-995A-A1Q** SD-995RE-21Q 1/4 ... lang:en score:24 filesize: 3.87 M page\_count: 32 document date: 2016-05-30

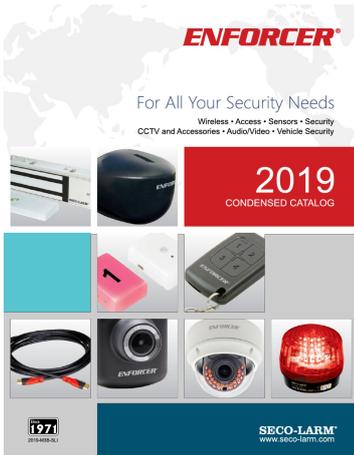

[SECO-LARM ENFORCER 2019 Condensed Catalog](#)

A comprehensive catalog of SECO-LARM ENFORCER security products for 2019, covering access control, CCTV, wireless devices, sensors, burglar and security systems, audio/video equipment, stand-alone security solutions, and vehicle security. lang:en score:24 filesize: 13.54 M page\_count: 32 document date: 2019-05-30



[\[pdf\]](#) Accessories Catalog

SECO LARM Surveillance Video Our new completely redesigned website is much more intuitive informative and easier to use Everything right at your fingertips 2017 SLI FullCate 172302 WEB seco larm image data A Documents 05 Catalogs b Full FULL CATALOG For All Your Security Needs 47years Wireless Access Sensors Security CCTV and Acc ... ure or fail-safe Includes 5 different stainless-steel faceplates Horizontal-Adjustment Door Strike **SD-995A-A1Q** Adjustable keeper to compensate for installation issues Operating voltage: 8-16VAC, 12... lang:en score:24 filesize: 11.69 M page\_count: 128 document date: 2017-03-27



[\[pdf\]](#) Accessories Catalog

For All Your Security Needs SECO LARM Our new completely redesigned website is much more intuitive informative and easier to use Everything right at your fingertips 2017 SLI FullCate 170724 low seco larm image data A Documents 05 Catalogs b Full FULL CATALOG For All Your Security Needs 47 years Wireless Access Sensors Security CCTV and Ac ... ure or fail-safe Includes 5 different stainless-steel faceplates Horizontal-Adjustment Door Strike **SD-995A-A1Q** Adjustable keeper to compensate for installation issues Operating voltage: 8-16VAC, 12... lang:en score:24 filesize: 11.31 M page\_count: 128 document date: 2017-07-24



[pdf] Warranty Catalog

2018 SLI CondenseCate 180323 Spanish web seco larm 80 image data A Documents 05 Catalogs a Condensed

2018-M3B CATLOGO CONDENSADO Inalmbrico ad Acceso id Sensores ur Seguridad g CCTV y Accesorios Se Au ... as / falla segura Fuerza esttica de 1,000 lb 454 kg Cerraduras Elctricas con Ajuste Horizontal **SD-995A-A1Q** SD-995RE-21Q Modo seguro Placa frontal opcional **SD-995A-A1Q** SD-995RE-21Q El ajuste ... lang:es score:24 filesize: 6.42 M page\_count: 32 document date: 2018-04-05

SECURITY SECULOARM Updated: 12/01/16

SECULOARM  
Commercial/Residential Security Systems and Accessories

Address: 1841 Hollister Ave., San Jose, California 95131  
Telephone: 408-941-9900, 941-1841  
Fax: 408-283-7138  
E-mail: sales@seco-larm.com  
Internet: www.seco-larm.com

Note: Minimum order quantities apply to some products.

Models listed are in 12 and 24V AC models.  
(\*Minimum quantity indicated)

Qty: Minimum order quantities apply to some products.  
Prices are approximate, subject to change without notice. Prices are subject to change without notice.

Model	Description	Quantity	Price	Unit	Qty. Order
SD-1000	Door Protection Device with 12V or 24V AC power source. Includes 12V or 24V AC power source, door sensor, and mounting hardware. (12V or 24V AC power source not included)	501.00	21.00	1	50
SD-1001	Door Protection Device with 12V or 24V AC power source. Includes 12V or 24V AC power source, door sensor, and mounting hardware. (12V or 24V AC power source not included)	501.00	21.00	1	50
SD-1002	Door Protection Device with 12V or 24V AC power source. Includes 12V or 24V AC power source, door sensor, and mounting hardware. (12V or 24V AC power source not included)	501.00	21.00	1	50
SD-1003	Door Protection Device with 12V or 24V AC power source. Includes 12V or 24V AC power source, door sensor, and mounting hardware. (12V or 24V AC power source not included)	501.00	21.00	1	50
SD-1004	Door Protection Device with 12V or 24V AC power source. Includes 12V or 24V AC power source, door sensor, and mounting hardware. (12V or 24V AC power source not included)	501.00	21.00	1	50
SD-1005	Door Protection Device with 12V or 24V AC power source. Includes 12V or 24V AC power source, door sensor, and mounting hardware. (12V or 24V AC power source not included)	501.00	21.00	1	50
SD-1006	Door Protection Device with 12V or 24V AC power source. Includes 12V or 24V AC power source, door sensor, and mounting hardware. (12V or 24V AC power source not included)	501.00	21.00	1	50
SD-1007	Door Protection Device with 12V or 24V AC power source. Includes 12V or 24V AC power source, door sensor, and mounting hardware. (12V or 24V AC power source not included)	501.00	21.00	1	50
SD-1008	Door Protection Device with 12V or 24V AC power source. Includes 12V or 24V AC power source, door sensor, and mounting hardware. (12V or 24V AC power source not included)	501.00	21.00	1	50
SD-1009	Door Protection Device with 12V or 24V AC power source. Includes 12V or 24V AC power source, door sensor, and mounting hardware. (12V or 24V AC power source not included)	501.00	21.00	1	50
SD-1010	Door Protection Device with 12V or 24V AC power source. Includes 12V or 24V AC power source, door sensor, and mounting hardware. (12V or 24V AC power source not included)	501.00	21.00	1	50
SD-1011	Door Protection Device with 12V or 24V AC power source. Includes 12V or 24V AC power source, door sensor, and mounting hardware. (12V or 24V AC power source not included)	501.00	21.00	1	50
SD-1012	Door Protection Device with 12V or 24V AC power source. Includes 12V or 24V AC power source, door sensor, and mounting hardware. (12V or 24V AC power source not included)	501.00	21.00	1	50
SD-1013	Door Protection Device with 12V or 24V AC power source. Includes 12V or 24V AC power source, door sensor, and mounting hardware. (12V or 24V AC power source not included)	501.00	21.00	1	50
SD-1014	Door Protection Device with 12V or 24V AC power source. Includes 12V or 24V AC power source, door sensor, and mounting hardware. (12V or 24V AC power source not included)	501.00	21.00	1	50
SD-1015	Door Protection Device with 12V or 24V AC power source. Includes 12V or 24V AC power source, door sensor, and mounting hardware. (12V or 24V AC power source not included)	501.00	21.00	1	50
SD-1016	Door Protection Device with 12V or 24V AC power source. Includes 12V or 24V AC power source, door sensor, and mounting hardware. (12V or 24V AC power source not included)	501.00	21.00	1	50
SD-1017	Door Protection Device with 12V or 24V AC power source. Includes 12V or 24V AC power source, door sensor, and mounting hardware. (12V or 24V AC power source not included)	501.00	21.00	1	50
SD-1018	Door Protection Device with 12V or 24V AC power source. Includes 12V or 24V AC power source, door sensor, and mounting hardware. (12V or 24V AC power source not included)	501.00	21.00	1	50
SD-1019	Door Protection Device with 12V or 24V AC power source. Includes 12V or 24V AC power source, door sensor, and mounting hardware. (12V or 24V AC power source not included)	501.00	21.00	1	50
SD-1020	Door Protection Device with 12V or 24V AC power source. Includes 12V or 24V AC power source, door sensor, and mounting hardware. (12V or 24V AC power source not included)	501.00	21.00	1	50

Page 1 of 12

[pdf] Accessories

Katrina King BVDIST 080216 PRICES e mail seco larm 80 image data A Documents Marketing DISTRIBUTOR SECULOARM SECULOARM Commercial/Residential Security Systems and Accessories Address: 1 ... 9-T15Q/B SD-969-T15Q/S SD-993B-SS SD-993S-SB SD-993S-UB SD-994A-A1AQ SD-994A-A1SQ SD-994C SD-994C24 **SD-995A-A1Q** DESCRIPTION Outdoor single-gang No-Touch Sensor with mechanical override button. Adjust...

lang:en score:24 filesize: 806.17 K page\_count: 32 document date: 2016-08-03



[pdf] Catalog

CCTV SECULOARM Fuerza de sujeción 1 200 lb 545kg Operación seleccionable 12 o 24 V C Sin magnetismo residual Protección contra sobretensiones MOV 2018 SLI CondenseCate 181112 Spanish seco larm image data A Documents 05 Catalogs b Condensed

Control de Acceso Cerraduras Electromagnéticas de 1,200-lb E-941SA-1200 Cerradura estndar, listada ... as / falla segura Fuerza esttica de 1,000 lb 454 kg Cerraduras Elctricas con Ajuste Horizontal **SD-995A-A1Q** SD-995RE-21Q Modo seguro Placa frontal opcional SD-995RE-21Q **SD-995A-A1Q** El ajuste de... lang:es score:24 filesize: 12.8 M page\_count: 32 document date: 2018-11-12




[pdf] Accessories Catalog

2019 SLI FullCate 190522 SECO LARM Our new completely redesigned website is much more intuitive informative and easier to use Everything right at your fingertips seco larm image data A Documents 05 Catalogs Catalog

ADDRESS 16842 Millikan Avenue Irvine, CA 92606 PHONE/FAX 800 662-0800 949 261-2999 Fax: 949 ... ..15 SD-994C24.....15 **SD-995A-**

**A1Q**.....16 SD-995A-D3Q.....

lang:en score:23 filesize: 17.32 M page\_count: 128 document date: 2019-05-30

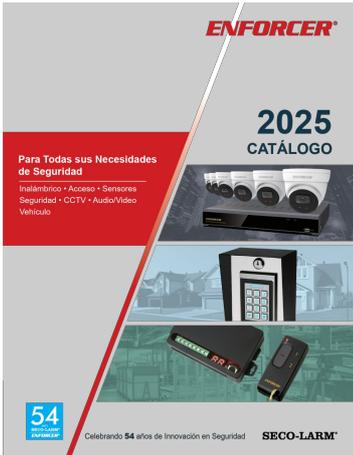

[pdf]

PC 2025 SLI SP 241120 seco larm 2024 11 |||

Para Todas sus Necesidades de Seguridad Inalámbrico Acceso Sensores Seguridad CCTV Audio/Video Ve ... ..22 SD-994C24.....22 **SD-995A-**

**A1Q**.....20 SD-995A-D3Q.....

lang:es score:22 filesize: 56.17 M page\_count: 144 document date: 2024-11-20




[pdf] Catalog

2023 SLI FullCate 230306 SP Web Index of 03 seco larm |||

elebrando 50 aos de innovacin en segur Para Todas sus Necesidades de Seguridad C CATALOGAR Inalámbr ... ..19 SD-994C24.....19 **SD-995A-**

**A1Q**.....20 SD-995A-D3Q.....

lang:es score:22 filesize: 34.95 M page\_count: 144 document date: 2023-03-06

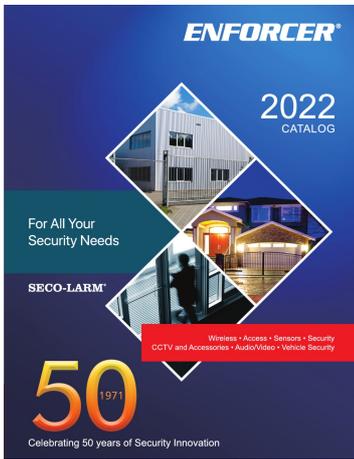

[\[pdf\]](#) Catalog

2022 SLI FullCate 210908 Hi 1 seco larm image data A Documents 05 Catalogs Catalog

About SECO-LARM SECO-LARM has long been the best choice for distributors and dealers around the wor ... ..15 SD-

994C24.....15 **SD-995A-**

**A1Q**.....16 SD-995A-D3Q.....

lang:en score:22 filesize: 77.96 M page\_count: 132 document date: 2021-09-08



[\[pdf\]](#)

2023 SLI FullCate 230306 SP Web 1 Index of 03 seco larm |||

elebrando 50 aos de innovacin en segur Para Todas sus Necesidades de Seguridad

C CATLOGO Inalambric ... ..19 SD-

994C24.....19 **SD-995A-**

**A1Q**.....20 SD-995A-D3Q.....

lang:es score:22 filesize: 33.35 M page\_count: 144 document date: 2023-03-06



[\[pdf\]](#) Catalog

Download Catalogs 2022 SLI FullCate 220211 SP web seco larm image data A Documents 05 Catalog |||

Sobre SECO-LARM SECO-LARM ha sido durante mucho tiempo la mejor opcin para los distribuidores y con ... ..15 SD-

994C24.....15 **SD-995A-**

**A1Q**.....16 SD-995A-D3Q.....

lang:es score:21 filesize: 50.41 M page\_count: 132 document date: 2022-07-07

**SECO-LARM®** Access

**Electric Door Strike with Horizontal Adjustment**  
**SD-995A-A1Q**  
 5-16 VAC/12VDC, Fail-Secure

**Features:**

- 1/2" horizontal keeper adjustment compensates for installation differences such as warped doors, different sized lock bolts, etc.
- Unique design accommodates both wood and metal doors
- Fail secure operation
- Reversible for right or left-handed doors
- Durable stainless-steel housing
- Minimum lock bolt for easier installation
- Corrosion-resistant case and moving parts
- Complete mounting hardware included
- Screw terminals for ease of wiring
- Operating voltage: 5-16VAC/12VDC
- UL94B-0 (V0) fire rating
- Meets UL 300 fire rating
- Current draw: 750mA @ 12VDC
- Receiver depth: 1 1/2" (38.1mm)
- Lock depth: 1 1/2" (38.1mm)
- Strike depth: 1 1/2" (38.1mm)
- ANSI compatible case: 4 1/2" x 1 1/2" x 1 1/2" (114.3x38.1x38.1 mm)
- Case: ANSI compatible SD-8995E-21Q (114.3x38.1 mm)
- Case: ANSI compatible SD-8995E-21Q (114.3x38.1 mm)

**Dimensions:**

**Keeper Adjustment:**  
 The keeper can be easily adjusted horizontally to account for various installation anomalies. To adjust the keeper:

- Loosen the two keeper adjustment screws.
- Slide the keeper horizontally to fit the desired clearance.
- Tighten the two keeper adjustment screws.

**Specifications:**

Model	SD-995A-A1Q
Operator	Fail-secure
Operating voltage	5-16 VAC/12VDC
Current	1.25A @ 12VDC
Power	15W
Operating temperature	14°-131° F / 5°-48° C
Weight	13.5g (0.48oz)
Max. lock throw	1/2" (12.7mm)
Strike depth	1 1/2" (38.1mm)
Design	Reversible Non-Handed
Adjustable keeper	Max. 1/2" (12.7mm)
Receiver dimensions	4 1/2" x 1 1/2" x 1 1/2" (114.3x38.1 mm)

**Optional Receiver SD-8995E-21Q**

Model	SD-8995E-21Q
Dimensions	1 1/2" x 1 1/2" x 1 1/2" (38.1x38.1 mm)
Construction	Stainless Steel

**SECO-LARM® U.S.A., Inc.**  
 1992 Wilbur Street, Suite 100, San Jose, CA 95128  
 Phone: (408) 251-2289 • (800) 642-8852 Fax: (408) 251-7320  
 Website: [www.seco-larm.com](http://www.seco-larm.com) Email: [info@seco-larm.com](mailto:info@seco-larm.com)

**SECO-LARM® ENFORCER® COMMERCIAL** 1971

[pdf] Specifications

PI SD 995A A1Q 1604 eddie Download Specs Seco Larm Reversible Electric Door Strike W Horizontal Ad specs v 1663797084 cdn shopify s files 1 0141 9617 8998 |||

lang:es score:21 filesize: 448.84 K page\_count: 1 document date: 2022-09-21

**ENFORCER®**

**46** years

For All Your Security Needs

Wireless • Access • Sensors • Security • CCTV and Accessories • Audio/Video • Vehicle Security

**2016**  
FULL CATALOG

**SECO-LARM®**  
www.seco-larm.com

**1971**

[pdf] Catalog

2016 FullCatalog 160527 Hi jchan M04B SECO LARM For All Your Security Needs When it comes to the business side of security is right choice for distributors and dealers around world This true today more than ever Just compare We at have been developing manufacturing selling state art access control products 46 Low seco larm image data A Documents 05 Catalogs b Full 80

2016-M04B For All Your Security Needs When it comes to the business side of security, SECO-LARM i ... SD-994C .....14 SD-994C24 .....14 SD-995A-A1Q .....15 SD-995A-D3Q .....17 SD-995C...

lang:en score:21 filesize: 6.56 M page\_count: 128 document date: 2016-05-30