

SmarterFresh SF-W60

SmarterFresh SF-W60 Warm Water Faucet Bidet Sprayer Instruction Manual

Model: SF-W60 | **Brand:** SmarterFresh

1. INTRODUCTION

This manual provides comprehensive instructions for the installation, operation, and maintenance of your SmarterFresh SF-W60 Warm Water Faucet Bidet Sprayer. This product is designed to provide a comfortable and hygienic cleaning experience by utilizing warm water directly from your bathroom sink faucet.

Please read these instructions carefully before installation and use to ensure proper function and longevity of your bidet sprayer.

2. PACKAGE CONTENTS

Verify that all components are present before beginning installation:

- Handheld Bidet Sprayer Head (Stainless Steel)
- Faucet Diverter Valve (Solid Brass, Chrome Plated)
- Stainless Steel Braided Hose (86 inches)
- Sprayer Holder (Wall Mount and Toilet Hook options)
- Various Faucet Adapters
- Installation Manual

SELF-INSTALLATION KIT



Image 2.1: Components of the SmarterFresh SF-W60 Bidet Sprayer kit, including the sprayer head, faucet diverter, braided hose, and mounting options.

3. SAFETY INFORMATION

- Always turn off the bathroom faucet after using the bidet sprayer to prevent accidental leaks and to prolong the life of the diverter and sprayer components.
- Ensure all connections are tightened securely to prevent leaks. Do not overtighten.
- Do not use abrasive cleaners or harsh chemicals on the product, as this may damage the finish.
- Keep out of reach of children when not in use to prevent misuse or water spills.

4. INSTALLATION GUIDE

The SmarterFresh SF-W60 is designed for easy installation, typically completed within 10 minutes without the need for a plumber. This system connects directly to your bathroom sink faucet.

4.1. Faucet Compatibility

This bidet sprayer is compatible only with faucets that have a removable aerator. It is **not** designed for use with shower heads, tub spouts, pump-style, or pull-out style faucets. Please verify your faucet type before proceeding.

2 MOUNT OPTIONS



Image 4.1: Illustration showing a compatible faucet with a removable aerator and examples of incompatible faucet types (pull-out, spout, shower pipes).

4.2. Step-by-Step Installation

1. **Prepare Your Faucet:** Unscrew and remove the existing aerator from your bathroom sink faucet.
2. **Install Faucet Diverter:** Attach the appropriate adapter (if needed) and then screw the faucet diverter valve onto your faucet spout. Ensure it is hand-tightened securely. Use thread tape if necessary to prevent leaks.
3. **Connect Bidet Hose:** Connect one end of the stainless steel braided hose to the bottom outlet of the faucet diverter valve. Connect the other end of the hose to the handheld bidet sprayer head.
4. **Mount Sprayer Holder:** Choose your preferred mounting option:
 - **Toilet Hook Mount:** Slide the toilet hook holder onto the side of your toilet tank.
 - **Wall Mount:** Use the provided screws and anchors to secure the wall mount holder to a suitable wall surface near your toilet.

5. **Test for Leaks:** Slowly turn on your bathroom faucet to a low flow. Check all connections for any leaks. If leaks occur, tighten connections further or reapply thread tape.



Image 4.2: Visual representation of the bidet sprayer hose connecting from the bathroom sink faucet to the toilet area.

SIMPLE & EASY TO USE!



Image 4.3: Depiction of the two available mounting options for the sprayer holder: a toilet tank hook and a wall-mounted bracket.

5. OPERATING INSTRUCTIONS

5.1. Water Flow and Temperature Control

The SmarterFresh SF-W60 allows for precise control over both water temperature and pressure.

- **Activate Water Flow:** Turn on your bathroom sink faucet to the desired temperature and flow rate.
- **Divert Water to Sprayer:** Use the lever on the faucet diverter valve to switch the water flow from the faucet spout to the bidet sprayer hose.
- **Adjust Temperature:** The water temperature is controlled directly by your sink faucet's hot and cold water handles. Adjust these to achieve your preferred warm water setting.
- **Control Pressure:** The water pressure from the sprayer head can be controlled by how much you depress the lever on the handheld sprayer. For a gentle spray, press lightly; for a stronger spray, press more firmly.

NO MORE COLD WATER SHOCK!

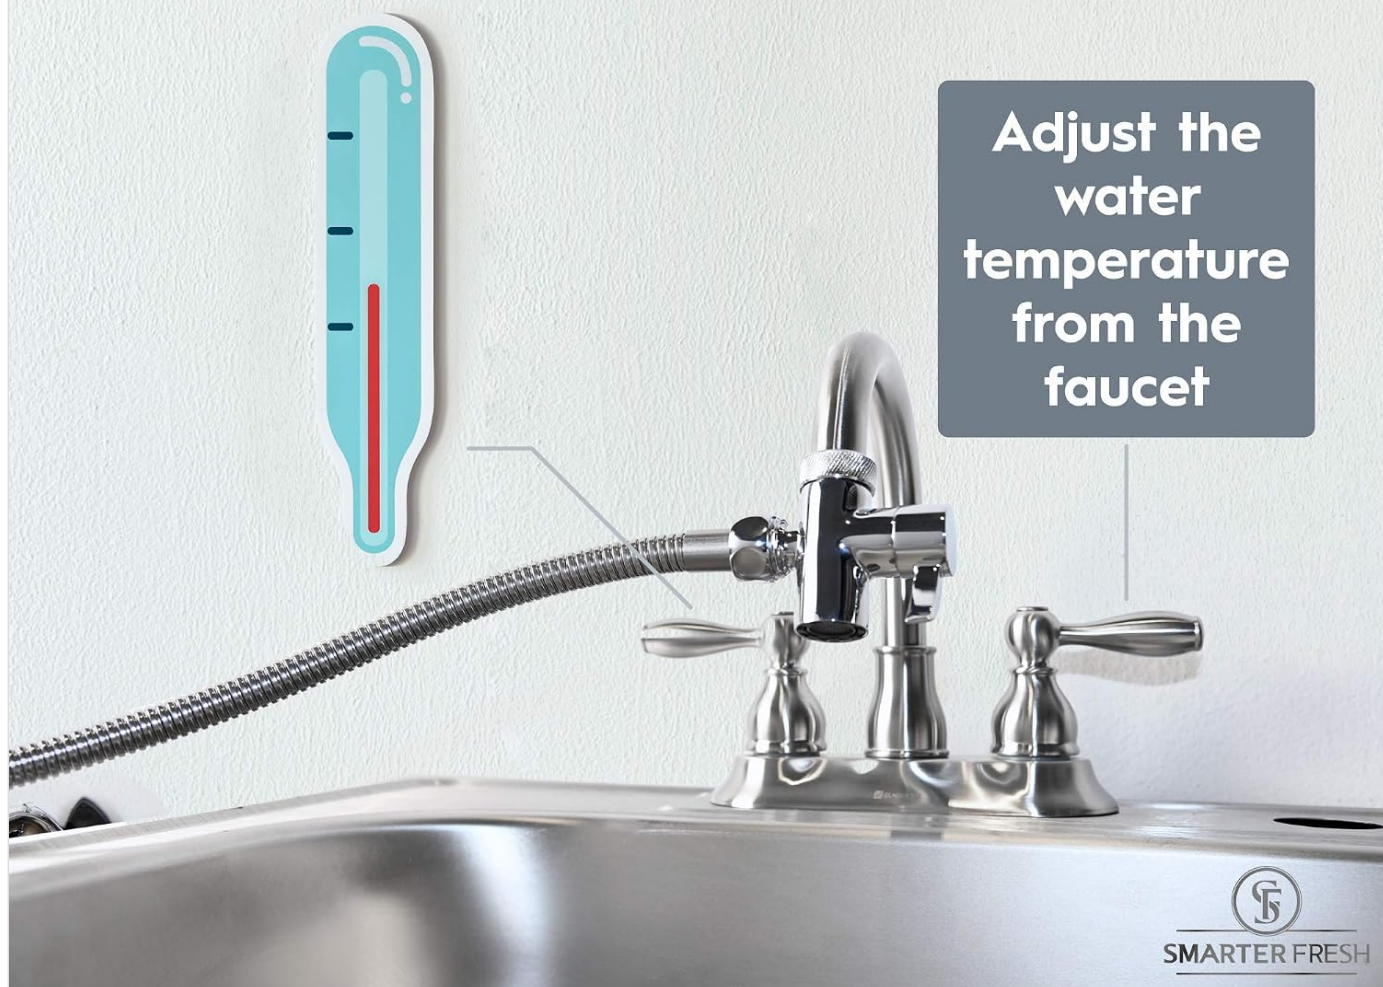


Image 5.1: Illustration demonstrating how to adjust water temperature using the existing sink faucet handles, with a thermometer graphic indicating warm water.



SMARTER FRESH

LIFETIME GUARANTEE

COVERS

- ✓ Leaks
- ✓ Manufacturing defects
- ✓ Loss of water pressure



Image 5.2: Visual guide on how to operate the faucet diverter to switch water flow between the sink faucet and the bidet sprayer.

6. MAINTENANCE

- **Cleaning:** Wipe the bidet sprayer and hose with a soft, damp cloth regularly. For stubborn stains, use a mild soap solution. Rinse thoroughly and dry.
- **Avoid Harsh Cleaners:** Do not use abrasive pads, harsh chemicals, or ammonia-based cleaners, as these can damage the stainless steel finish.
- **Aerator Cleaning:** Periodically check the faucet aerator (part of the diverter) for mineral buildup. Unscrew and clean as needed.
- **Hose Inspection:** Inspect the hose for any signs of wear or damage. Replace if necessary to prevent leaks.

7. TROUBLESHOOTING

Problem	Possible Cause	Solution
---------	----------------	----------

Problem	Possible Cause	Solution
Water leaks from connections.	Loose connections, missing or damaged washers, insufficient thread tape.	Ensure all connections are hand-tightened. Check for proper placement of washers. Apply plumber's thread tape to threaded connections.
Low water pressure from sprayer.	Faucet not fully open, diverter not fully engaged, clogged sprayer head or aerator.	Ensure faucet is fully open. Verify diverter lever is completely switched. Clean sprayer head nozzles and faucet aerator for mineral buildup.
No warm water.	Faucet hot water supply not open, faucet temperature not adjusted.	Ensure your sink faucet's hot water handle is open and adjusted to the desired temperature.

8. SPECIFICATIONS

- **Model Name:** SF-W60
- **Material:** Stainless Steel (Sprayer Head, Hose), Brass (Diverter Valve)
- **Finish:** Polished Silver
- **Hose Length:** 86 Inches
- **Mounting Type:** Wall Mount, Toilet Tank Mount
- **Recommended Uses:** Bathroom (Personal Hygiene, Elderly Care, Pet Bathing, Cleaning)
- **Item Weight:** 1.96 pounds
- **Product Dimensions:** 10 x 3.5 x 6.5 inches (packaging)
- **UPC:** 735204871230

9. WARRANTY AND SUPPORT

The SmarterFresh SF-W60 Warm Water Faucet Bidet Sprayer comes with a **one-year warranty** covering manufacturer defects. This warranty ensures that the product is free from defects in material and workmanship under normal use.

For warranty claims, technical assistance, or if you require additional faucet adapters, please contact SmarterFresh customer service. Our support team is available to assist you with any questions or issues you may encounter.

For further assistance, please visit the [SmarterFresh Store on Amazon](#).

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question