Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

Duravit 002079

Duravit DuraStyle Elongated Toilet Seat User Manual

Model: 002079

Introduction

Thank you for choosing the Duravit DuraStyle Elongated Closed-Front Toilet Seat with Soft Close. This manual provides essential information for the proper installation, operation, maintenance, and care of your new toilet seat. Please read this manual thoroughly before installation and keep it for future reference.



Image: The Duravit DuraStyle Elongated Closed-Front Toilet Seat in white, viewed from above with the lid closed.

Safety Information

- Always handle the toilet seat and hardware with care to prevent damage or injury.
- Do not use abrasive cleaners or harsh chemicals, as these can damage the finish and material.
- Ensure all mounting hardware is securely tightened to prevent movement or instability.
- Keep small parts out of reach of children.

Package Contents

Before beginning installation, verify that all components are present:

- Duravit DuraStyle Elongated Toilet Seat with Lid
- Mounting Hardware (bolts, washers, nuts)

If any parts are missing or damaged, please contact Duravit customer support.

Setup and Installation

This section provides step-by-step instructions for installing your new toilet seat. Ensure the toilet surface is clean and dry before installation.

1. **Prepare the Toilet:** If replacing an old seat, remove it by unscrewing the nuts from the bolts underneath the toilet bowl rim. Clean the area thoroughly.
2. **Position the Seat:** Place the new Duravit toilet seat onto the toilet bowl, aligning the mounting holes on the seat with the holes on the toilet bowl.
3. **Insert Mounting Bolts:** Insert the provided mounting bolts through the holes in the toilet seat and down through the toilet bowl holes.
4. **Secure with Washers and Nuts:** From underneath the toilet bowl, place a washer onto each bolt, followed by a nut. Hand-tighten the nuts initially.
5. **Adjust Alignment:** Adjust the position of the toilet seat to ensure it is centered and properly aligned with the toilet bowl.
6. **Final Tightening:** Once aligned, use a wrench or appropriate tool to securely tighten the nuts. Do not overtighten, as this can damage the toilet or seat.



Image: The Duravit DuraStyle toilet seat properly installed on a white toilet, demonstrating its elongated design.

Operating the Soft-Close Feature

The Duravit DuraStyle toilet seat is equipped with a soft-close mechanism for both the seat and the lid, preventing

slamming and reducing noise.

- To engage the soft-close feature, simply push the seat or lid down gently. The mechanism will take over, allowing it to close slowly and quietly.
- Do not force the seat or lid down, as this can damage the soft-close mechanism. Allow it to close at its own controlled pace.



Image: A visual sequence illustrating the smooth, controlled descent of the toilet seat and lid due to the soft-close mechanism.

Maintenance and Cleaning

Proper care will ensure the longevity and appearance of your Duravit toilet seat.

- **Cleaning:** Use a soft cloth and mild, non-abrasive soap and water for regular cleaning. Wipe dry immediately after cleaning to prevent water spots.
- **Avoid Harsh Cleaners:** Do not use abrasive powders, scouring pads, strong detergents, disinfectants, or cleaners containing chlorine, ammonia, or acids, as these can damage the plastic material and finish.
- **Hinge Care:** Periodically check the mounting hardware for tightness and re-tighten if necessary. Keep the hinge area clean to ensure smooth operation.

Troubleshooting

Problem	Possible Cause	Solution
Seat is loose or wobbly.	Mounting nuts are loose.	Tighten the mounting nuts underneath the toilet bowl.

Problem	Possible Cause	Solution
Soft-close feature not working smoothly.	Mechanism is dirty or damaged.	Clean the hinge area. If still not working, contact customer support. Do not force the mechanism.
Seat does not align properly.	Seat was not centered during installation.	Loosen mounting nuts, adjust seat position, then re-tighten.

Specifications

- **Model:** Duravit DuraStyle Elongated Closed-Front Toilet Seat
- **Part Number:** 0020790000
- **Color:** White
- **Material:** Plastic (Urea-Duroplast)
- **Shape:** Elongated
- **Features:** Soft-Close Lid and Seat
- **Approximate Dimensions (L x W):** 14.69 inches x 16.93 inches (373 mm x 430 mm)
- **Item Weight:** 5.28 pounds (2.4 kg)

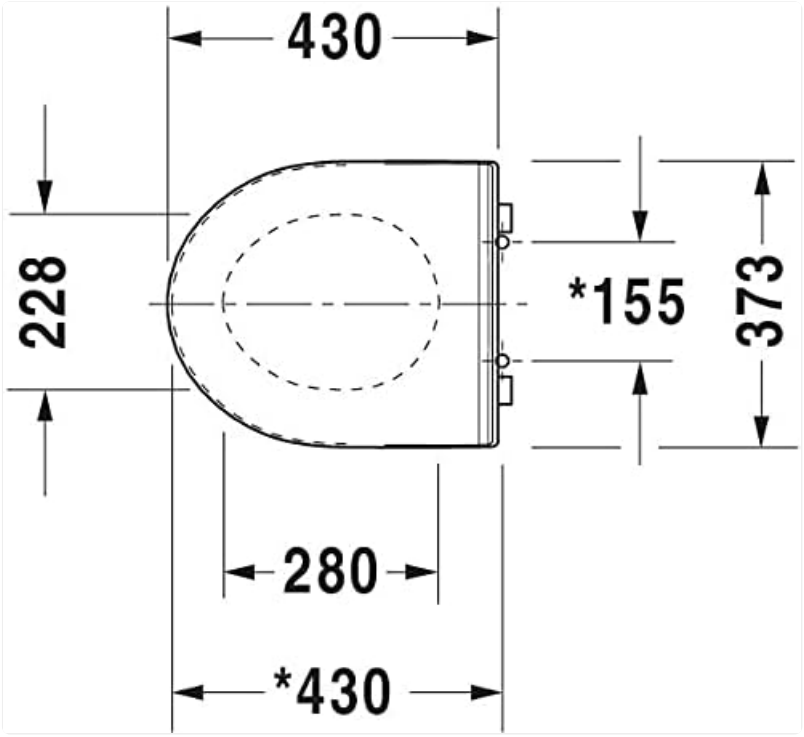


Image: Technical drawing detailing the dimensions of the Duravit DuraStyle toilet seat, including length, width, and mounting hole spacing.

Warranty and Support

The Duravit DuraStyle Elongated Closed-Front Toilet Seat is covered under Duravit's**5-year warranty** from the date of purchase. This warranty covers defects in material and workmanship under normal use and service.
For warranty claims, technical assistance, or to order replacement parts, please contact Duravit customer support:

- **Website:** www.duravit.us
- **Contact Information:** Refer to the official Duravit website for the most current contact details (phone, email).

Please have your model number (002079) and proof of purchase ready when contacting support.

© 2025 Duravit AG. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B01E7ICK4E

More documents and user manuals: **https://manuals.plus/**