

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [Moen](#) /

› [Moen Align Chrome One-Handle Pre-Rinse Spring Pulldown Kitchen Faucet, Model 5923 User Manual](#)

Moen 5923

Moen Align Chrome One-Handle Pre-Rinse Spring Pulldown Kitchen Faucet, Model 5923 User Manual

Model: 5923

INTRODUCTION

This manual provides comprehensive instructions for the installation, operation, maintenance, and troubleshooting of your Moen Align Chrome One-Handle Pre-Rinse Spring Pulldown Kitchen Faucet, Model 5923. Please read these instructions carefully before beginning installation or use to ensure proper function and to prevent damage.

SAFETY INFORMATION

Always adhere to local plumbing and building codes. If you are unsure about any part of the installation, consult a qualified professional. This faucet complies with the Federal Safe Drinking Water Act and NSF 61 standards, ensuring safe drinking water. It is also ADA Compliant, meeting specifications for accessibility.

PACKAGE CONTENTS

Verify that all components are present before beginning installation:

- Moen Align Kitchen Faucet (Model 5923)
- Flexible supply lines with 3/8" compression fittings
- Instruction Manual





Image: The Moen Align Chrome One-Handle Pre-Rinse Spring Pulldown Kitchen Faucet, Model 5923, showcasing its design and chrome finish.

SETUP (INSTALLATION)

This faucet is designed for single-hole deck mount installation. Ensure your sink or countertop has a compatible opening. An optional deckplate (Moen #141002) is sold separately for multi-hole installations if needed.

Key Installation Features:

- **Duralock Quick Connect System:** The faucet includes the Duralock quick connect system for simplified installation of the supply lines, often without the need for additional tools.
- **Flexible Supply Lines:** Pre-attached flexible supply lines with 3/8" compression fittings are provided for direct connection to your water supply.

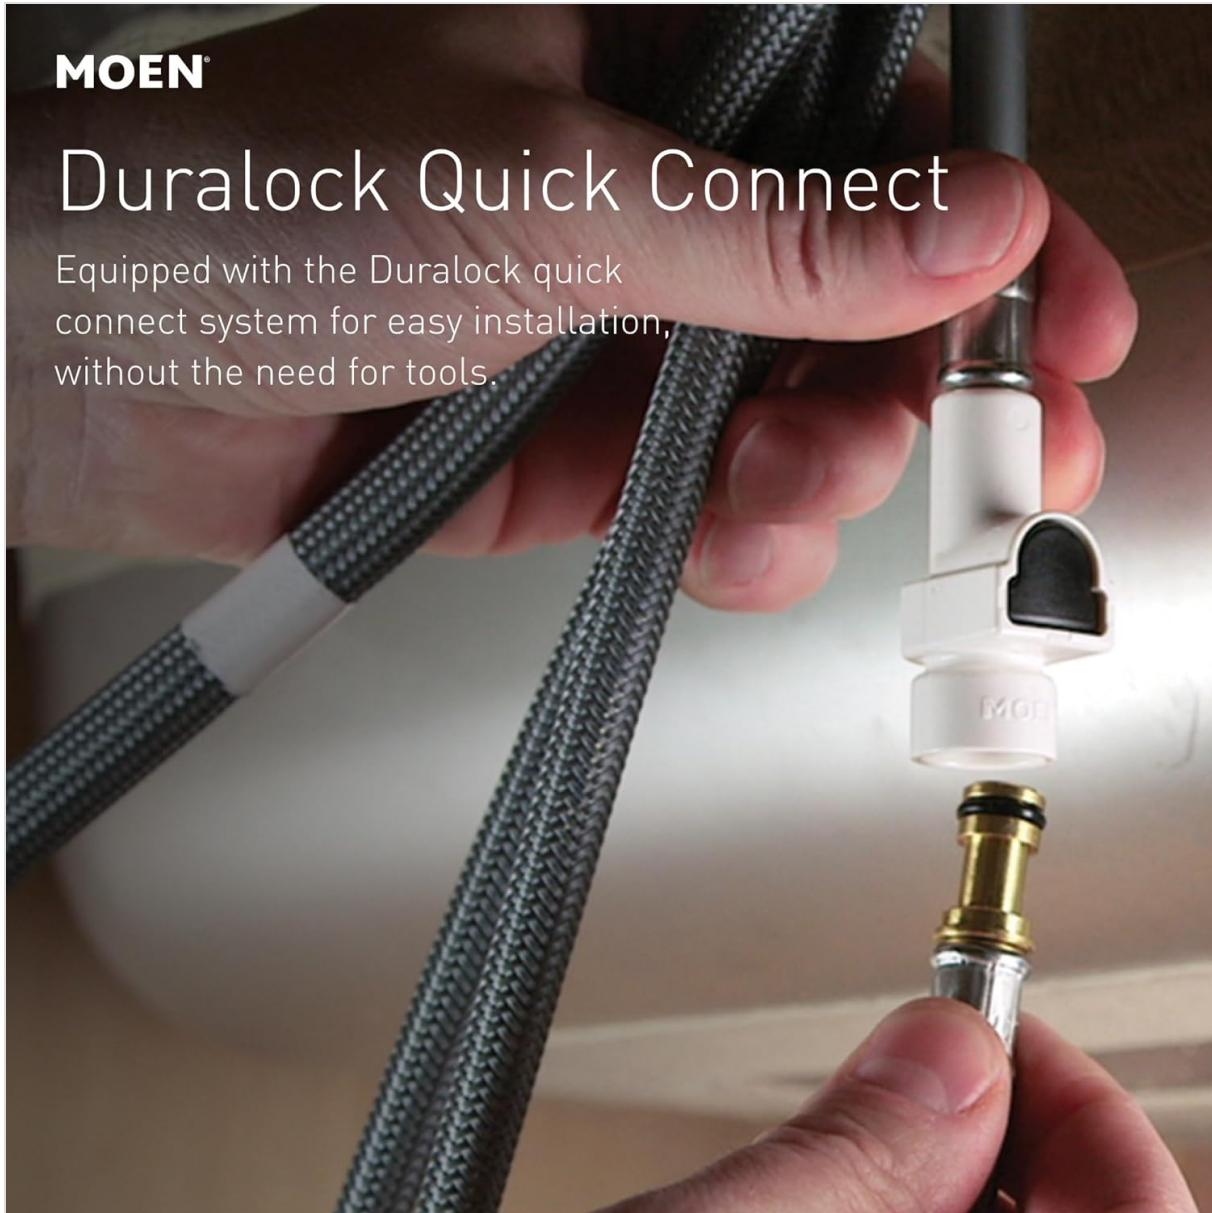


Image: Close-up view of the Duralock Quick Connect system, showing how the flexible supply line connects securely to the faucet without tools.

Installation Steps:

1. Turn off the main water supply to your kitchen.
2. Remove any existing faucet from the sink or countertop.
3. Insert the new Moen Align faucet into the single mounting hole.
4. Secure the faucet from underneath the sink using the provided mounting hardware.
5. Connect the flexible supply lines to the hot and cold water shut-off valves using the Duralock quick connect system. Ensure connections are tight to prevent leaks.

6. Flush the water lines by slowly turning on the hot and cold water supplies and allowing water to run for a few minutes.
7. Check all connections for leaks.

OPERATING INSTRUCTIONS

Water Flow and Temperature Control:

The faucet features a single handle for controlling both water flow and temperature. Move the handle up to increase flow and down to decrease it. Move the handle left for hot water and right for cold water.

Pulldown Sprayer with Power Boost:

The integrated pulldown sprayer offers enhanced functionality. The Reflex system ensures smooth operation, easy movement, and secure docking of the spray head after use.

- **Standard Stream/Spray:** Press the button on the spray head to switch between a steady stream and a wide spray pattern.
- **Power Boost:** Activate Moen's exclusive Power Boost technology by pressing the dedicated button on the spray head. This provides a stronger stream or spray for faster cleaning and filling of pots.



POWERBOOST™

Boosted water performance with the push of a button.
Boosted spray cleans 50% faster while boosted stream fills pots quickly.

Image: A hand holding the pulldown sprayer, demonstrating the powerful spray function for cleaning dishes.



Image: A hand using the pulldown sprayer to rinse grapes in a colander, highlighting its versatility.

MAINTENANCE

Cleaning the Faucet:

To maintain the chrome finish, clean regularly with a soft cloth and mild soap. Avoid abrasive cleaners, harsh chemicals, or scouring pads, as these can damage the finish. Rinse thoroughly after cleaning and dry with a soft cloth.

Aerator Maintenance:

If water flow decreases, the aerator may be clogged. Unscrew the aerator from the tip of the spray head, clean any debris, and reattach.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Low water flow	Clogged aerator or debris in supply lines.	Clean the aerator. Flush supply lines by disconnecting them from the faucet and running water into a bucket.
Leaks at connections	Loose connections or damaged O-rings.	Tighten connections. Inspect and replace O-rings if necessary.
Sprayer does not retract fully	Obstruction under the sink or weight not properly positioned.	Clear any obstructions. Ensure the sprayer hose weight is positioned correctly for optimal retraction.
Difficulty switching between spray modes	Mineral buildup in the spray head.	Soak the spray head in a vinegar solution to dissolve mineral deposits.

SPECIFICATIONS

Feature	Detail
Brand	Moen
Model Name	5923
Series ID	Align
Color	Chrome
Finish Type	Chrome
Material	Steel, Metal (Handle)
Mounting Type	Deck Mount
Installation Type	Deck Mounted, 1 Hole Installation
Number of Handles	1
Handle Location	Right
Spout Design	Pull Down
Spout Height	21.75 Inches
Spout Reach	10 Inches
Hose Length	68 Inches
Maximum Flow Rate	1.5 Gallons Per Minute

Feature	Detail
Product Dimensions	2.06"D x 10"W x 21.75"H
Item Weight	1.52 pounds (690 Grams)
Special Features	Pull Down Sprayer, Power Boost Technology
UPC	026508267028



Image: Technical diagram illustrating the dimensions of the Moen Align Faucet, including spout reach and height.

WARRANTY AND SUPPORT

Warranty Information:

This Moen faucet is backed by a **Limited Lifetime Warranty**. For specific details regarding coverage and terms, please refer to the warranty documentation included with your product or visit the official Moen website.

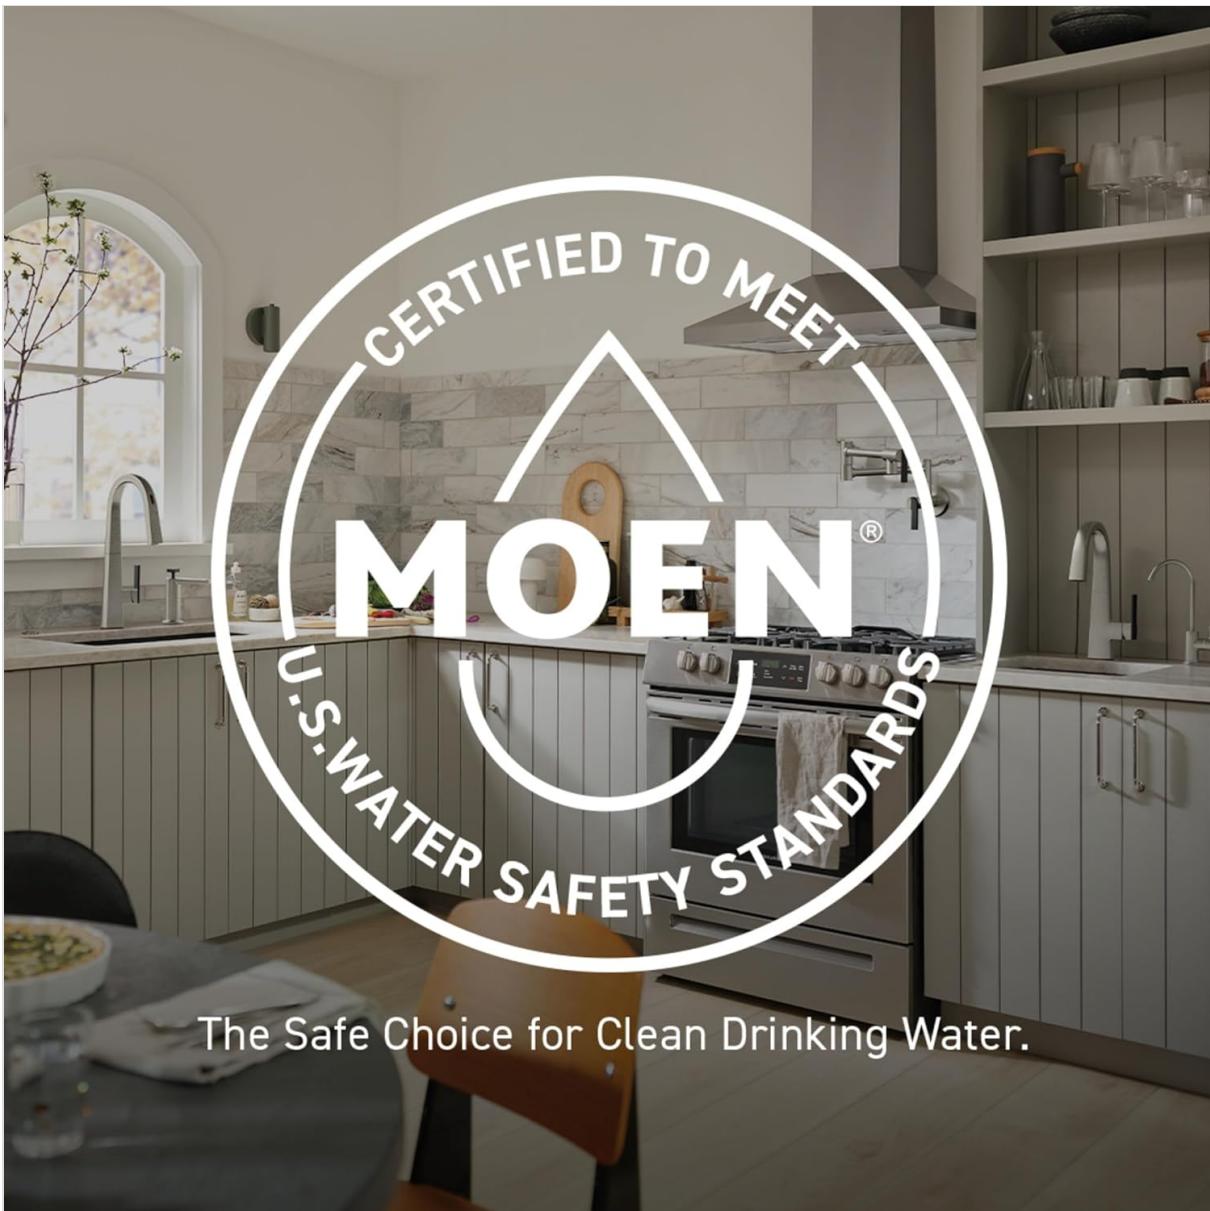


Image: Moen certification seal, indicating compliance with U.S. water safety standards, reinforcing product quality and safety.

Customer Support:



For further assistance, technical support, or to inquire about replacement parts, please contact Moen customer service. You can find contact information and additional resources on the official Moen website: www.moen.com.

© Moen Incorporated. All rights reserved.

Related Documents - 5923



[Moen INS10951 One Handle Pre-Rinse Spring Pulldown Kitchen Faucet Installation Guide](#)
Official installation guide and parts list for the Moen INS10951 One Handle Pre-Rinse Spring Pulldown Kitchen Faucet. Includes contact information, parts breakdown, and helpful tips.

	<p>Moen Single Handle Pulldown Kitchen Faucet Installation Guide (INS10105D)</p> <p>Official installation guide and product information for the Moen Single Handle Pulldown Kitchen Faucet, model INS10105D. Features multilingual support, step-by-step assembly instructions, parts lists, and troubleshooting tips.</p>
	<p>Moen SINEMA MotionSense Wave Pulldown Kitchen Faucet Illustrated Parts S5235EW Series</p> <p>Illustrated parts list for the Moen SINEMA MotionSense Wave Single Handle Pre-Rinse Spring Pulldown Kitchen Faucet, Model Series S5235EW. Includes part numbers, finishes, and ordering information.</p>
	<p>Moen One-Handle Pulldown Kitchen Faucet Support and Registration</p> <p>Find installation help, replacement parts, and register your Moen one-handle pulldown kitchen faucet (model INS10205C). Contact Moen for support and access online registration.</p>
	<p>Moen One-Handle Pulldown Kitchen Faucet Installation Guide</p> <p>Comprehensive installation guide for the Moen One-Handle Pulldown Kitchen Faucet (Model INS10205C). Includes parts list, step-by-step instructions, troubleshooting, and warranty information.</p>
	<p>Moen Belfield MotionSense Wave 7260EW Series Kitchen Faucet Illustrated Parts</p> <p>Illustrated parts list for the Moen Belfield MotionSense Wave™ Hands-Free, Single-Handle High Arc Pulldown Kitchen Faucet, model 7260EW Series. Find kit numbers and finishes for replacement parts.</p>