



[Manuals.plus](#) /

> [Jan Nowak](#) /

> Jan Nowak C001 Metal Office Cabinet Instruction Manual

Jan Nowak C001

Jan Nowak C001 Metal Office Cabinet Instruction Manual

Model: C001 | Brand: Jan Nowak

INTRODUCTION

This manual provides comprehensive instructions for the assembly, operation, maintenance, and troubleshooting of your Jan Nowak C001 Metal Office Cabinet. Please read this manual carefully before beginning assembly or use to ensure proper function and safety. Keep this manual for future reference.

SAFETY INSTRUCTIONS

- Always assemble the cabinet on a flat, stable surface.
- Ensure all components are present and undamaged before assembly.
- Do not overload shelves. The maximum load capacity per shelf is approximately 50 kg.
- Keep children and pets away during assembly.
- Use appropriate tools as specified in the assembly section.
- Secure the cabinet to a wall if there is a risk of tipping, especially in high-traffic areas or if storing heavy items on upper shelves.

PACKAGE CONTENTS

Verify that all parts are included in your package. If any parts are missing or damaged, please contact customer support.

Component	Quantity
Cabinet Panels (Top, Bottom, Sides, Back)	Various
Doors	2
Adjustable Shelves	Quantity varies by model (typically 4-5)
Locking Mechanism & Keys	1 set (2 keys)

Component	Quantity
Assembly Hardware (Screws, Nuts, Bolts, Shelf Pins)	1 bag

SETUP AND ASSEMBLY

Assembly is required. It is recommended to have two people for assembly. Please follow these steps carefully.

Step 1: Prepare the Area

Clear a spacious, flat area for assembly. Lay down a blanket or cardboard to protect the cabinet parts and your floor from scratches.

Step 2: Assemble the Frame

Connect the side panels to the base and top panels using the provided screws and bolts. Ensure all connections are secure but do not overtighten initially.




Image: A visual representation of the cabinet frame during initial assembly, showing the connection points of the main panels.

Step 3: Install the Back Panel

Slide or attach the back panel into the designated grooves or using the provided fasteners. This step adds rigidity to the cabinet structure.

Step 4: Attach the Doors

Mount the two reinforced swing doors to the cabinet frame using the hinges. Ensure the doors align properly and swing freely. The opening angle is approximately 110 degrees.

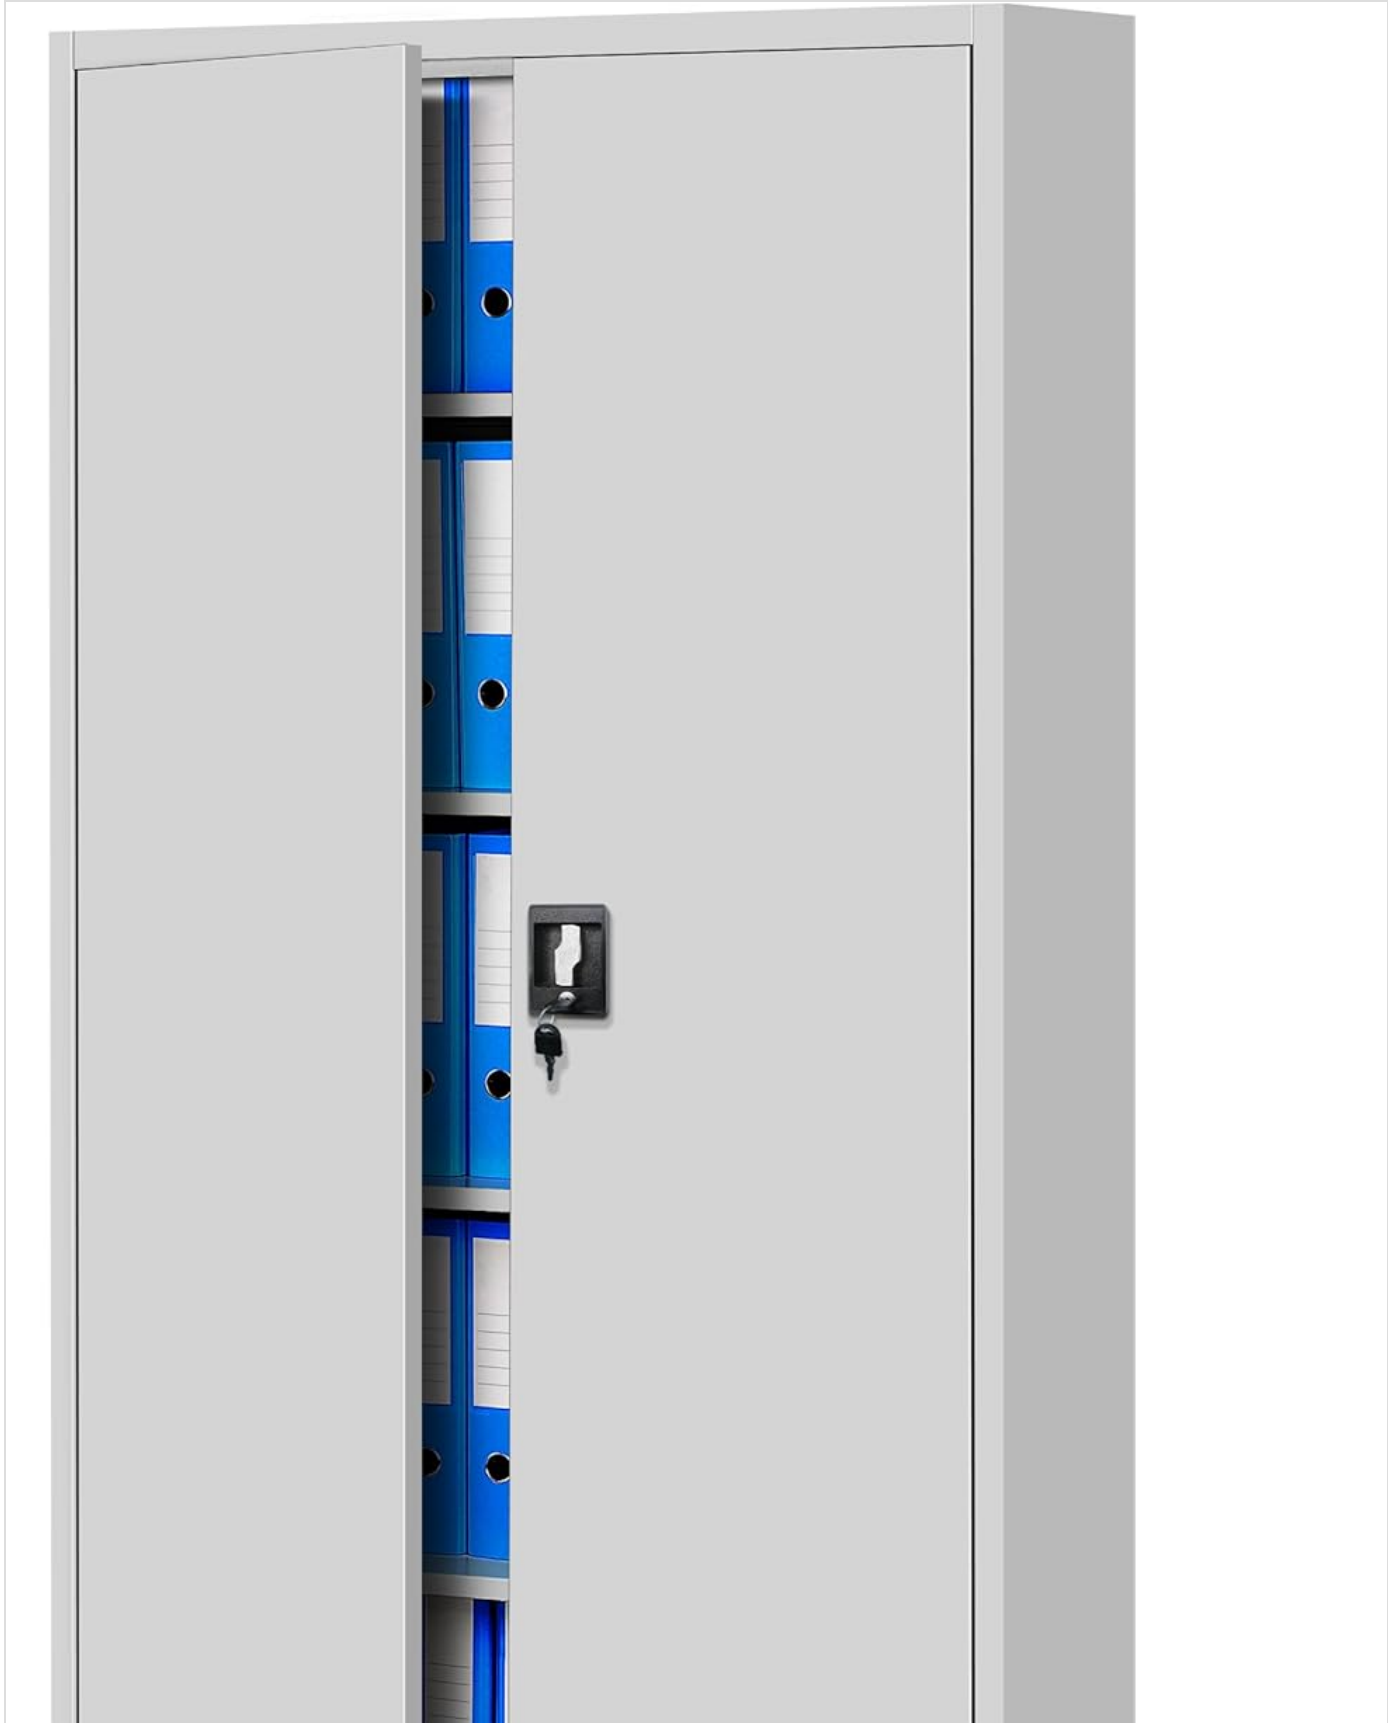

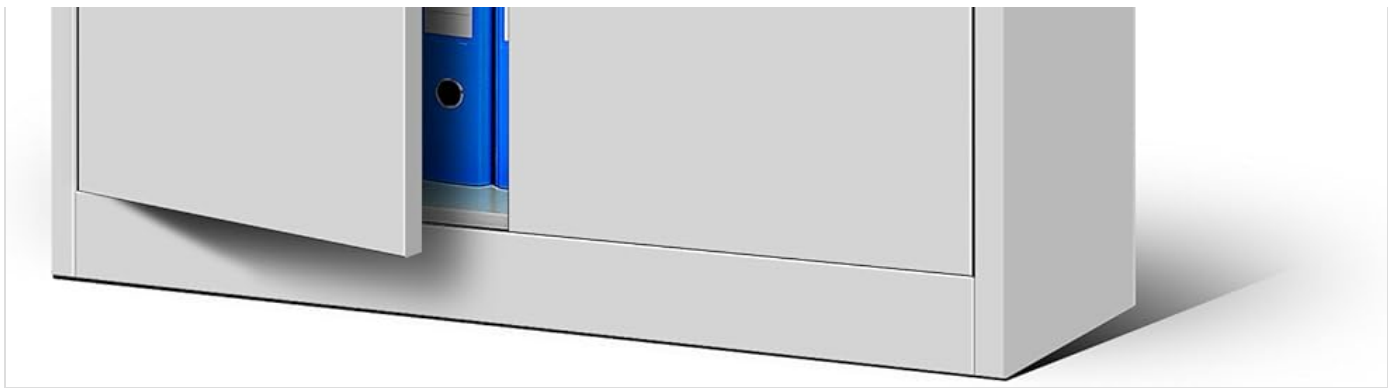


Image: The fully assembled cabinet with doors, highlighting the lock and key mechanism.

Step 5: Install Shelves and Locking Mechanism

Insert the shelf pins into the desired height adjustments (25mm increments). Place the adjustable shelves onto the pins. Install the cremone bolt lock and security cylinder lock with the two provided keys. Test the locking mechanism to ensure it functions correctly.

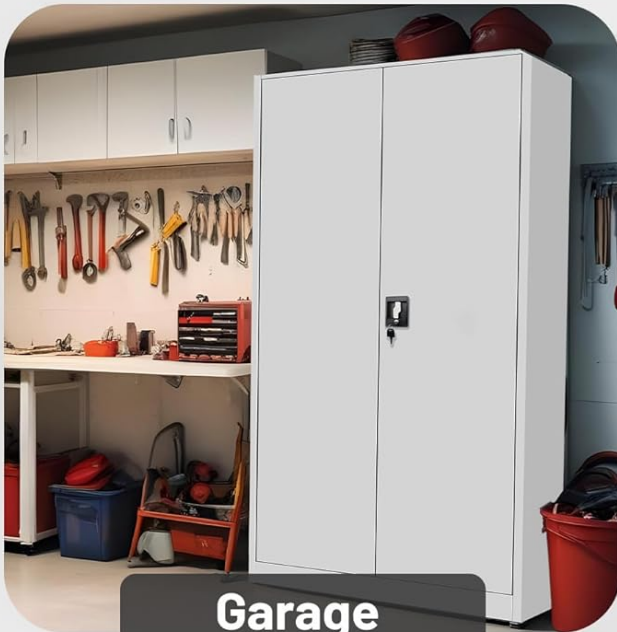


Image: Inside the cabinet, demonstrating the adjustable shelves and the secure locking system with keys.



Image: The cabinet interior showcasing its capacity to store numerous files and binders.

OPERATING INSTRUCTIONS

Adjusting Shelves

The shelves can be adjusted in 25mm increments to accommodate items of various sizes. To adjust, remove all items from the shelf, lift the shelf, reposition the shelf pins to the desired height, and then place the shelf back onto the pins.

Locking and Unlocking

To lock the cabinet, ensure both doors are fully closed. Insert one of the provided keys into the cylinder lock and turn it to engage the cremone bolt mechanism. To unlock, insert the key and turn it in the opposite direction.

Storage Capacity

Each shelf has a load capacity of approximately 50 kg. Distribute weight evenly across shelves to maintain stability. The cabinet is

designed for clear and secure storage of documents, files, and other items in office, basement, or garage environments.



Image: The cabinet in a workshop, demonstrating its versatility for storing tools and equipment.



Image: The cabinet in an office, showing its use for document storage.

MAINTENANCE

The Jan Nowak C001 cabinet is made of high-quality steel with a powder-coated finish, making it easy to clean and resistant to

corrosion and mechanical damage.

Cleaning

Wipe the cabinet surfaces with a soft, damp cloth. For stubborn dirt, a mild detergent can be used. Avoid abrasive cleaners or solvents, as these may damage the powder-coated finish.

Lock Care

Periodically lubricate the lock mechanism with a small amount of graphite powder or a silicone-based lubricant to ensure smooth operation.

General Care

Inspect the cabinet periodically for any loose screws or connections and tighten them as needed. Ensure the cabinet remains on a level surface to prevent stress on the frame and doors.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Doors do not close properly or are misaligned.	Uneven assembly, loose hinges, or cabinet not level.	Check that the cabinet is on a level surface. Tighten hinge screws. Re-check assembly steps for proper alignment of panels.
Lock mechanism is stiff or difficult to turn.	Lack of lubrication, debris in lock, or misaligned doors.	Apply graphite powder or silicone lubricant to the lock. Ensure doors are fully closed and aligned before locking.
Shelves sag or are unstable.	Overloaded shelf, incorrect shelf pin placement, or damaged shelf.	Reduce weight on the shelf (max 50 kg). Ensure shelf pins are fully inserted and correctly positioned. Inspect shelf for damage.
Cabinet wobbles or is unstable.	Uneven floor, loose connections, or not properly secured.	Ensure the cabinet is on a level surface. Tighten all assembly screws. Consider securing the cabinet to a wall for added stability.

SPECIFICATIONS

Model: C001

Brand: Jan Nowak

Material: High-quality steel, powder-coated

Material Thickness: 0.6 mm

Color: Grey (RAL 7035)

Dimensions (H x W x D): 185 cm x 90 cm x 40 cm

Weight: Approximately 27 kg

Shelf Load Capacity: Approximately 50 kg per shelf

Doors: 2 reinforced swing doors

Door Opening Angle: Approximately 110°

Locking Mechanism: Cremone bolt lock, security cylinder lock with 2 keys

Adjustable Shelves: Yes, in 25 mm increments

Recommended Use: Indoor

WARRANTY AND SUPPORT

Jan Nowak products are manufactured to high-quality standards. For information regarding warranty coverage, please refer to the warranty card included with your purchase or visit the official Jan Nowak website. If you encounter any issues or require assistance, please contact Jan Nowak customer support.

Customer Support: Please refer to the contact information provided on the Jan Nowak official website or your purchase documentation.

Returns: This product is returnable within 30 days of receipt. Please refer to the retailer's return policy for details.