

[Manuals.plus](#) /

› [UPBRIGHT](#) /

› UpBright 9V AC/DC Adapter User Manual

UPBRIGHT BC-SW-15-101-BK

User Manual

UPBRIGHT 9V AC/DC ADAPTER

Model: BC-SW-15-101-BK

[Overview](#)

[Setup](#)

[Operation](#)

[Maintenance](#)

[Troubleshooting](#)

[Specifications](#)

[Warranty](#)

[Support](#)

Product Overview

The UpBright 9V AC/DC Adapter, model BC-SW-15-101-BK, is a switching power supply designed to provide stable 9V DC power to compatible electronic devices. It features a universal input voltage range (100-240V AC) and delivers up to 2 Amps of current, making it suitable for various applications requiring a 9V power source.




Image: The UpBright 9V AC/DC Adapter, showing the main unit with a two-prong US plug and the attached DC output cable with a barrel connector.

Setup Instructions

1. **Verify Compatibility:** Before connecting, ensure your device requires a 9V DC input and that its power input port is compatible with the adapter's barrel connector. Check the device's specifications for voltage (V), amperage (A), and polarity. This adapter provides 9V DC at up to 2A.
2. **Connect to Device:** Insert the barrel connector of the UpBright adapter firmly into the power input port of your electronic device.
3. **Connect to Power Outlet:** Plug the AC prongs of the adapter into a standard wall power outlet (100-240V AC, 50/60Hz).
4. **Power On Device:** Once connected, power on your electronic device. The adapter will automatically supply power.

Come With A Suitable Outlet Adapter (Only One) to Fit

Your Country/Area For International Order

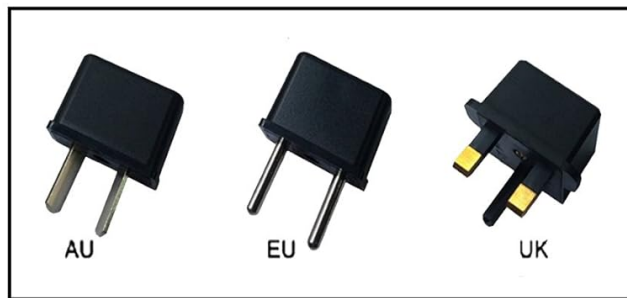

THIS PRODUCT COMES WITH A UPBRIGHT®

LIMITED WARRANTY CERTIFICATE
+ UPBRIGHT® LIMITED WARRANTY



Image: The UpBright 9V AC/DC Adapter shown alongside various international plug adapters (AU, EU, UK), indicating its global compatibility when used with appropriate regional adapters.

Note: If your region uses a different plug type than the one provided, you may need a suitable outlet adapter (e.g., AU, EU, UK) for international use. Ensure the outlet adapter is rated for the appropriate voltage and current.

Operating Instructions

The UpBright AC/DC Adapter operates automatically once connected to a power source and a compatible device. It is designed for continuous operation within its specified voltage and current limits.

- Ensure the adapter is placed in a well-ventilated area to prevent overheating.
- Do not overload the adapter by connecting devices that draw more than 2 Amps of current.
- Disconnect the adapter from the wall outlet when not in use for extended periods.

Maintenance

This adapter requires minimal maintenance. Follow these guidelines to ensure its longevity and safe operation:

- **Cleaning:** Disconnect the adapter from power before cleaning. Use a soft, dry cloth to wipe the exterior. Do not use liquid cleaners or solvents.
- **Storage:** Store the adapter in a cool, dry place away from direct sunlight and extreme temperatures when not in use.
- **Cable Care:** Avoid bending or crimping the power cord excessively. Do not place heavy objects on the cord.
- **Inspection:** Periodically inspect the adapter and its cables for any signs of damage, such as frayed wires or cracked casing. If damage is found, discontinue use immediately.

Troubleshooting

If you encounter issues with your UpBright AC/DC Adapter, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Device not powering on.	• Adapter not plugged in. • Wall outlet is not active. • Device requires different voltage/amperage. • Loose connection. • Damaged adapter/cable.	• Ensure adapter is fully plugged into wall outlet. • Test outlet with another device or check circuit breaker. • Verify device's power requirements match adapter (9V DC, max 2A). • Ensure barrel connector is securely inserted into device. • Inspect adapter and cable for visible damage. If damaged, replace.
Adapter feels hot.	• Normal operation (slight warmth). • Overloaded. • Poor ventilation.	• Slight warmth is normal. • Ensure connected device does not exceed 2A. • Place adapter in an open area, away from heat sources.
Intermittent power.	• Loose connection. • Damaged cable.	• Check all connections for tightness. • Inspect cable for breaks or kinks. Replace if damaged.

If the problem persists after trying these solutions, contact UpBright customer support.

Product Specifications

Brand	UPBRIGHT
Model Number	BC-SW-15-101-BK
Input Voltage	100-240V AC, 50/60Hz
Output Voltage	9V DC
Output Amperage	1.66A - 2A (1660mA - 2000mA)
Power Output	15W
Connector Type	Barrel Connector
Color	Black

Certifications

CE, CCC, ROHS (as per product description)

Warranty Information

This UpBright product comes with a Limited Warranty Certificate. Please refer to the certificate included with your purchase for specific terms and conditions, including warranty period, coverage details, and claim procedures.



Image: A visual representation indicating that the product includes a UpBright Limited Warranty Certificate.

Typically, the warranty covers defects in materials and workmanship under normal use. It does not cover damage caused by misuse, accidents, unauthorized modifications, or natural disasters.

Customer Support

For technical assistance, warranty claims, or any other inquiries regarding your UpBright 9V AC/DC Adapter, please contact UpBright customer support.

Refer to the contact information provided on the product packaging or the official UpBright website for the most current support details.

When contacting support, please have your product model number (BC-SW-15-101-BK) and purchase details readily available.

© 2024 UPBRIGHT. All rights reserved.

This manual is for informational purposes only. Specifications are subject to change without notice.