Manuals+

Q & A | Deep Search | Upload

manuals.plus /

- > PRESTIGE /
- > PRESTIGE Paints Interior Paint and Primer In One, 1-Gallon, Semi-Gloss, SW6943-PCM Instruction Manual

PRESTIGE P500-N-SW6943

PRESTIGE Paints Interior Paint and Primer In One

Model: SW6943-PCM Semi-Gloss, 1-Gallon
Brand: PRESTIGE

1. PRODUCT OVERVIEW

PRESTIGE Paints Ultra Premium Acrylic Latex Interior Paint is formulated as a paint and primer in one. It is suitable for properly prepared uncoated drywall, stucco, plaster, or previously painted interior surfaces. This product is ideal for various indoor spaces including living rooms, family rooms, media rooms, bedrooms, dining rooms, and hallways. It features a semi-gloss finish, which is more reflective than satin but less shiny than a full gloss, providing a bright appearance and ease of cleaning.



Image: PRESTIGE Paints 1-Gallon Semi-Gloss paint can in Intense Teal color.

2. SETUP AND UNBOXING

Your PRESTIGE Paints 1-gallon paint can is shipped in a specially designed, drop-tested box to prevent spills. Upon receipt, carefully open the box with the 'UP' arrows pointing upwards.

- 1. Remove the paint stick, informational pamphlet, and lid opener tool from the box.
- 2. Lift the cardboard circle from the top of the paint can lid to reveal the color dab, allowing you to verify the ordered color.
- 3. Carefully lift the paint can out of the box and place it on a stable, hard surface.
- 4. Use the provided lid opener tool or a household screwdriver to gently pry off the metal clips securing the lid.
- 5. Once the clips are removed, carefully lift the lid.
- 6. Although the paint is shaken before shipping, it is recommended to stir the paint thoroughly with the provided paint stick before application to ensure color uniformity.



Image: Unboxing contents, including paint stick and lid opener.



Image: PRESTIGE paint can with lid secured.



Image: Prying off metal clips from the paint can lid.



Image: Removing the final metal clip.

3. Surface Preparation

Proper surface preparation is crucial for optimal paint adhesion and finish quality.

- 1. Remove all loose paint from the surface.
- 2. Clean the surface thoroughly with a detergent to remove dirt, grease, and other contaminants. Rinse well to ensure all soap residue is gone, then allow the surface to dry completely.
- 3. For glossy surfaces, scuff sand them to create a better adhesion profile.
- 4. Repair any imperfections such as cracks or holes. Sand smooth when dry.

- 5. Remove all dust with a damp cloth and allow to dry.
- 6. For new plaster, ensure it is properly cured before painting.
- 7. For new wood, an oil-based primer/sealer may be required.
- 8. For metal surfaces, use an appropriate rust primer before applying paint.
- 9. For stained or glossy surfaces, use a stain-blocking primer sealer.

4. APPLICATION INSTRUCTIONS

Follow these steps for effective paint application:

- 1. Stir or mix the paint thoroughly before using. If using multiple containers of the same color, intermix them to ensure color uniformity.
- 2. Apply the paint as is, using a high-quality applicator such as a 3/8-inch nap roller cover, brush, or pad painter.
- 3. If necessary for spraying, thin sparingly with water.
- 4. Average coverage is 250-400 sq. ft. (37 square meters) per gallon.
- 5. The paint dries to the touch in approximately one hour.
- 6. If a second coat is needed, recoat after four hours. Certain colors may require more than one coat for complete hide.



Image: Example of Flat finish application.



Image: Example of Eggshell finish application.



Image: Example of Satin finish application.



Image: Example of Semi-Gloss finish application.

5. PRODUCT FEATURES

- Paint and Primer in One: Simplifies the painting process by combining priming and painting steps.
- 100% Acrylic Latex: Ensures easy cleanup with soap and water.
- Low VOC: Contains less than 5 g/l prior to tinting, contributing to better indoor air quality.
- **Semi-Gloss Finish:** Provides a durable, washable, and reflective surface, ideal for high-humidity areas like bathrooms and kitchens.
- Smooth Application: Designed for easy and consistent coverage.



Visit our Brand Store to see Thousands of Paint Color options!

Image: Key features of PRESTIGE Paints.

6. SPECIFICATIONS

Brand	PRESTIGE
Color	SW6943-PCM (Intense Teal comparable match)
Finish Type	Semi-Gloss
Size	1 Count (Pack of 1), 128 Fluid Ounces
Special Feature	Paint-and-primer-in-one
Paint Type	Acrylic
Specific Uses For Product	Interior
Surface Recommendation	Plaster, Drywall, Stucco, Previously Painted Surfaces
Full Cure Time	4 Hours (for recoat)

Coverage	325-400 sq. ft. per gallon
Item Weight	12 pounds
Product Dimensions	10.69 x 9.13 x 10.69 inches
Model Number	P500-N-SW6943

7. MAINTENANCE

The semi-gloss finish of this paint is designed for durability and ease of cleaning. After 14 days, the painted surface can be gently cleaned with a non-abrasive cleaner. Avoid harsh chemicals or abrasive scrubbing that could damage the finish.

8. TROUBLESHOOTING

If you encounter issues during or after application, consider the following:

- **Uneven Coverage:** Ensure the paint is thoroughly stirred before and during application. Apply in thin, even coats. Some colors may naturally require additional coats for full opacity.
- Poor Adhesion: This often results from inadequate surface preparation. Ensure surfaces are clean, dry, dull (if previously glossy), and free of loose material. Priming stained or glossy surfaces with a stain-blocking primer is essential.
- Color Discrepancy: Actual paint colors can vary from on-screen representations due to differences in sheen, lighting, surface texture, and application method. Always verify the color dab on the can lid matches your order.

9. WARRANTY INFORMATION

PRESTIGE Paints' interior and exterior paint, when applied according to all label directions on a properly prepared surface, is warranted for a lifetime. This warranty excludes failures due to structural defects, failure of previous paint, or deterioration of the underlying surface. If this paint fails to perform according to the warranty, return the container with the receipt to the place of purchase for replacement paint or a refund of the purchase price. This warranty does not cover labor or the cost of labor for paint application or removal. This warranty provides specific rights, and you may have other rights that vary from state to state.


10. SUPPORT AND CONTACT

For further assistance or inquiries regarding your PRESTIGE Paints product, please refer to the contact information provided on the product label or the informational pamphlet included in your packaging. You may also visit the official PRESTIGE Paints website for additional resources and support.



Image: PRESTIGE ColorMatch feature for color selection assistance.

Related Documents - P500-N-SW6943

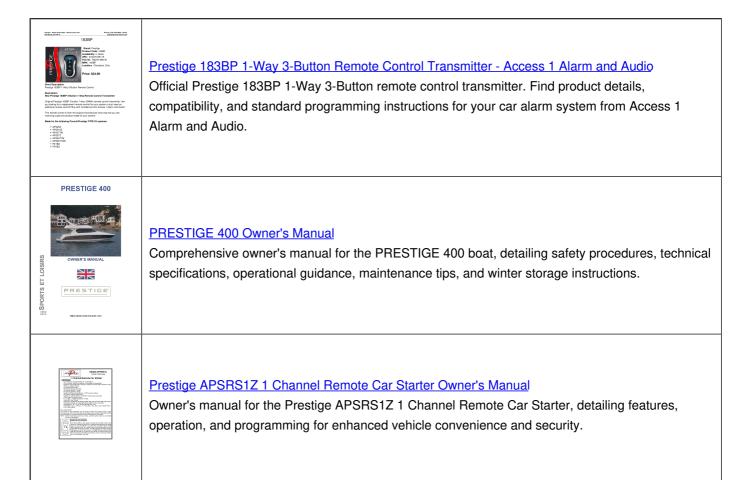



Prestige 18LCDSP-1 Car Alarm Manual and FCC Information

This document provides the user manual and FCC compliance information for the Prestige 18LCDSP-1 car alarm system, detailing its features, button functions, and RF exposure guidelines.



Prestige Pro Line Hoods (PL) Installation Guide and Manual

This official installation guide provides comprehensive instructions for Prestige Pro Line (PL) model range hoods. It covers safety, handling, ventilation, cleaning, maintenance, installation steps, wiring diagrams, and warranty information for domestic kitchen use.



<u>Prestige Outer Lid Pressure Cooker Range User Manual | Safety, Usage, and Maintenance Guide</u>

Comprehensive user manual for Prestige Outer Lid Pressure Cookers. Learn about safety features, how to use, clean, maintain, and troubleshoot your Prestige pressure cooker. Includes cooking reference and warranty information.