

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [FULUPET](#) /

› [FULUPET Wireless Dog Fence & Training Collar System User Manual](#)

FULUPET FULUPETXW-T18

FULUPET Wireless Dog Fence & Training Collar System User Manual

Model: FULUPETXW-T18

PRODUCT OVERVIEW

The FULUPET 2-in-1 Wireless Dog Fence and Training Collar System offers a comprehensive solution for pet containment and behavior correction. This upgraded 2025 model features a sleek LCD color screen for intuitive setup and operation. Utilizing 2.4GHz technology, it provides reliable signal accuracy, even through obstacles like walls or trees, making it suitable for various environments from backyards to travel. The system functions both as a customizable wireless fence and a multi-dog training collar, offering beep, vibration, and static correction modes.



The FULUPET 2-in-1 Wireless Dog Fence and Training Collar System, including the remote transmitter and two receiver collars.

Key Features:

- **2025 Upgraded System:** Features a sleek LCD color screen for instant setup and intuitive control.
- **2-in-1 Functionality:** Operates as both a wireless electric fence and a training collar.
- **Advanced Electric Dog Fence Mode:** Customizable safety zone from 50 to 990 feet radius with 6 boundary levels.
- **Multi-Dog Training:** Capable of training up to 4 dogs simultaneously with individual settings.
- **3 Training Modes:** Offers adjustable beep, vibration, and 10 levels of static correction (0-9).
- **IPX6 Waterproof Collar:** Receiver collar is waterproof for use in various weather conditions and water activities.
- **Long-Lasting Power:** Rechargeable batteries for both transmitter and collar, with 1-2 hour charging time and 1-2 days of use.
- **Night-Safe Adjustable Collar:** Fits 15-120 lb dogs (8-29 inches neck size) with reflective straps for visibility.
- **2.4GHz Technology:** Ensures stable and accurate signal transmission.


Follow these steps to set up your FULUPET Wireless Dog Fence and Training Collar System:

1. **Charge Devices:** Ensure both the transmitter and receiver collars are fully charged using the provided USB charging cable. Full charge typically takes 1-2 hours.
2. **Mount Transmitter:** Mount the transmitter on a wall at least 3.5 feet high for optimal signal transmission. Avoid placing it near large metal objects or concrete walls that may interfere with the signal.
3. **Prepare Collar:** Attach the silicone caps to the metal probes on the receiver collar to prevent chafing and ensure comfort for your dog.
4. **Adjust Collar Fit:** Adjust the length of the receiver collar to fit your dog's neck. Ensure it is snug enough for the probes to make contact with the skin, but loose enough for two fingers to fit comfortably underneath. The collar is suitable for dogs weighing 15-120 lbs with neck sizes from 8-29 inches.
5. **Power On:** Press the power button on both the transmitter and the receiver collar to turn them on.
6. **Select Mode:** On the transmitter, press the "MODE" button to switch between "Fence" mode and "Training" mode.
7. **Set Fence Range (Fence Mode):** In "Fence" mode, use the "+" or "-" buttons to adjust the control range from 50 feet to 990 feet radius. Start with a wider boundary to help your dog learn the limits.
8. **Configure Training Settings (Training Mode):** In "Training" mode, use the "CH" button to select the specific dog's collar you wish to control (A, B, C, or D). For each dog, you can adjust the warning mode (Beep, Vibration, or Static) and the strength level (0-9) using the respective buttons.
9. **Lock/Unlock Device:** To lock or unlock the transmitter, press the "+" and "-" buttons simultaneously. The lock icon on the LCD screen will indicate the status.

Pioneering LCD Big Colored Screen




Built-in 2.4G PFC antenna

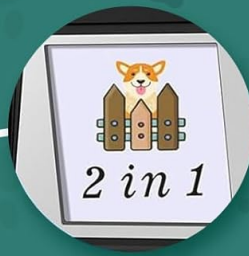

User-friendly interface




Transmitter and Receiver Collar are rechargeable and portable for outdoor use

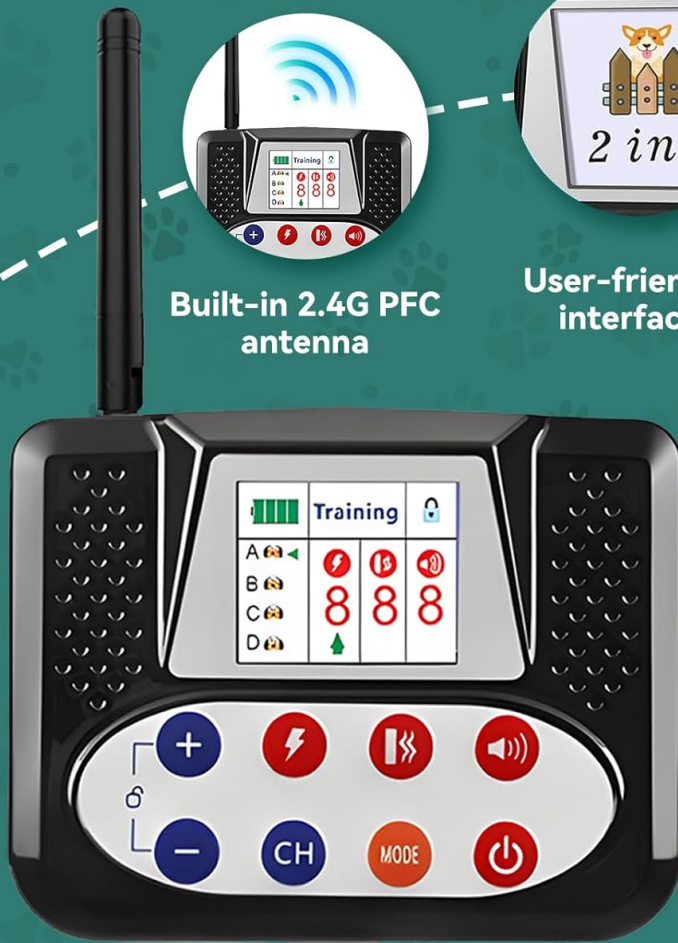

Visual guide for the simple setup process of the FULUPET system.

Suitable for Most Sizes of Dogs

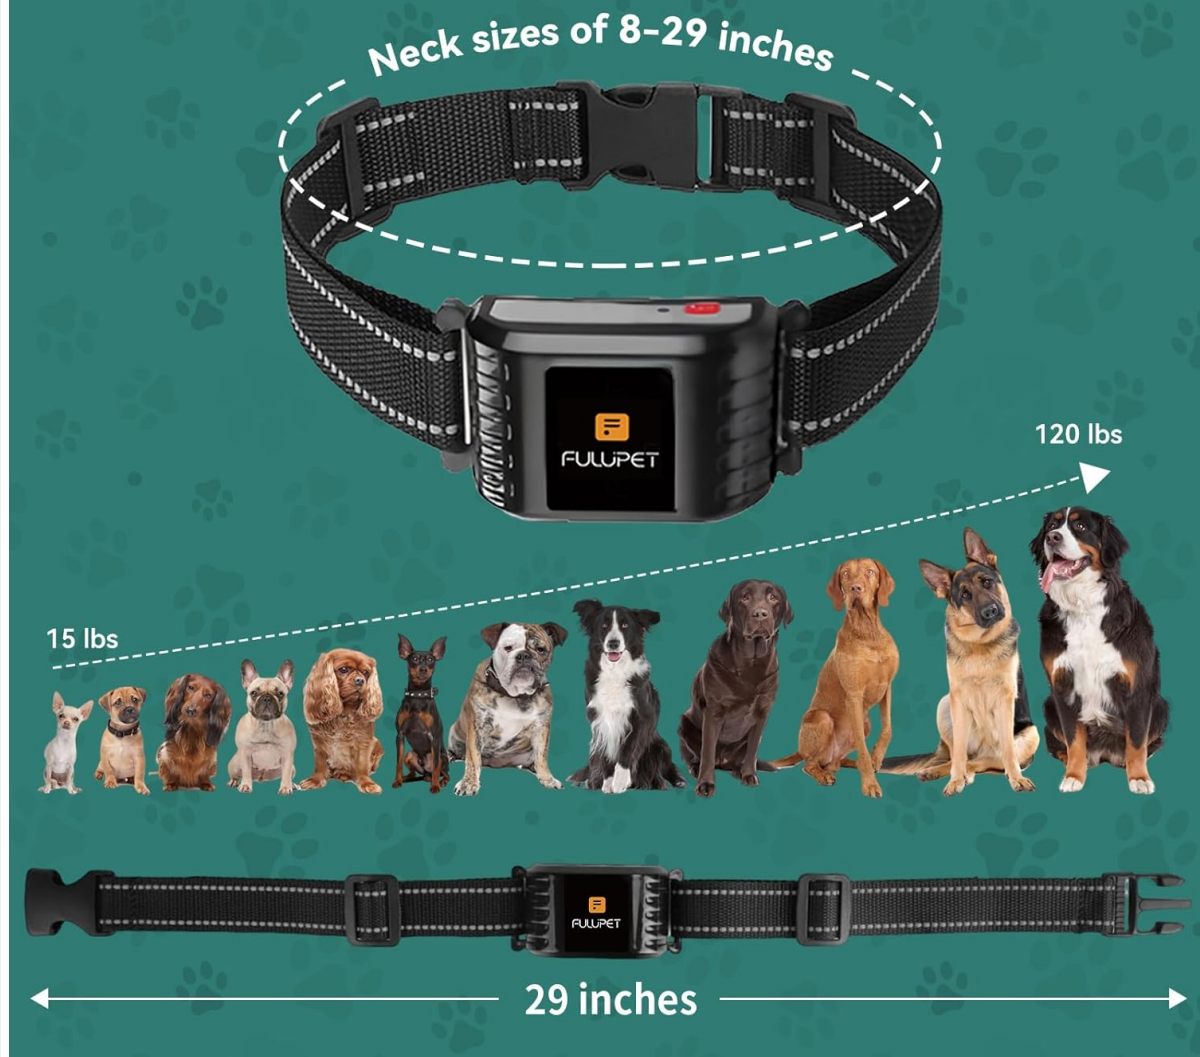

Information on charging the transmitter and collar, highlighting long battery life and USB charging capability.

OPERATING INSTRUCTIONS

The FULUPET system offers two primary operating modes: Wireless Fence and Remote Training.

Wireless Fence Mode:

In this mode, the system creates a circular boundary around the transmitter. When your dog approaches the boundary, the collar will activate a warning sequence:

- **Warning Zone:** As the dog approaches the set boundary, the collar will first emit a beep sound.
- **Correction Zone:** If the dog continues past the warning zone, the collar will then activate vibration or gentle static correction, depending on your chosen settings.

The radius of the fence can be adjusted from 50 to 990 feet using the "MODE" button and the "+" or "-" buttons on the transmitter. It is recommended to start with a larger boundary and gradually decrease it as your dog learns the limits.



Visual representation of the adjustable wireless fence boundary and correction zones.

Remote Training Mode:

This mode allows you to manually control the training collar for behavior correction. You can train up to 4 dogs simultaneously, with individual settings for each collar.

- **Select Dog:** Use the "CH" button on the transmitter to select the specific dog's collar you wish to control (A, B, C, or D).
- **Choose Warning Mode:** The system offers three distinct warning modes:
 - **Beep:** Audible tone (0-9 levels).
 - **Vibration:** Gentle vibration (0-9 levels).
 - **SAFE Static:** Low-voltage static correction (0-9 levels).
- **Adjust Intensity:** Use the "+" and "-" buttons to adjust the intensity level (0-9) for the selected warning mode. Level 0 is a warning-only mode without correction.



**Remote
Dog Collar**
can control up to **4 dogs** at the same time

The remote transmitter allows control of up to 4 dogs simultaneously.

Easy To Set Up



① Press Power Button to turn on / off the device



② Press Mode Button to switch between "Fence" & "Training" mode



③ Under Fence Mode, press "+" or "-" button to adjust the control range from 50 ft to 990 ft



④ Under Training Mode, press "CH" button to switch between different dogs



⑤ Under Training Mode, press "Beep" "Vibration" "Safety Static" button to choose the warning mode



⑥ Under Training Mode, press "+" or "-" button to adjust the warning strength between 0-9 levels



⑦ Press "+" and "-" button at the same time to lock & unlock the device

Overview of the three available training modes and their adjustable intensity levels.

Official product video demonstrating the features and functionality of the FULUPET wireless dog fence and training system.

MAINTENANCE

- **Charging:** Both the transmitter and receiver collars are rechargeable. Use the provided USB cable to charge them. A full charge takes approximately 1-2 hours and provides 1-2 days of use for the collar.
- **Waterproof Collar:** The receiver collar is IPX6 waterproof, meaning it can withstand splashes, rain, and even brief immersion. This allows your dog to play in wet conditions without damaging the collar. However, the transmitter is NOT waterproof and should be protected from moisture.
- **Collar Cleaning:** Regularly clean the collar and the contact points on the receiver with a damp cloth to ensure proper function and hygiene.
- **Collar Adjustment:** Periodically check the collar fit to ensure it remains comfortable and effective as your dog grows or changes weight.

Longer Battery Life & USB Charging



 **2 Hour**
quick charge

 **190 Days**
standby time



120 hours of wireless dog fence usage

The receiver collar is IPX6 waterproof, suitable for various wet conditions.

TROUBLESHOOTING

If you encounter issues with your FULUPET Wireless Dog Fence and Training Collar System, consider the following common solutions:

- **Signal Spotty/Interference:** The 2.4GHz signal can be affected by concrete walls, large metal structures, or other interference. Try repositioning the transmitter to a more open area, away from obstructions. Performance may vary depending on your specific environment.
- **Collar Not Responding:**
 - Ensure both the transmitter and the collar are fully charged and powered on.
 - Verify that the collar is properly paired with the transmitter and set to the correct channel.
 - Check the fit of the collar to ensure the contact points are making proper contact with your dog's skin.
 - Increase the intensity level of the chosen correction mode on the transmitter.
- **Dog Not Responding to Correction:**
 - Ensure the collar is fitted correctly and the contact points are making good contact.

- Increase the intensity level of the correction.
- Re-evaluate your dog's training. Some dogs may require more consistent training or a different correction level.
- **Transmitter Display Issues:** If the LCD screen is not displaying correctly, ensure the transmitter is charged and try restarting it by turning it off and on.

For further assistance, please refer to the Warranty & Support section.

SPECIFICATIONS

Feature	Detail
Brand	FULUPET
Model Number	FULUPETXW-T18
Item Weight	8 ounces
Item Dimensions (LxWxH)	3 x 2 x 1 inches
Power Source	1 Lithium Ion batteries required (included)
Control Range	50-990 ft radius (wireless fence mode)
Training Modes	Beep, Vibration, SAFE Static (0-9 levels)
Collar Waterproof Rating	IPX6
Collar Fit	15-120 lb dogs, 8-29 inches neck size
Included Components	1 X Kit Accessories, 1 X Manual, 1 X Transmitter, 2 X Collar Receiver

WARRANTY & SUPPORT

The FULUPET Wireless Dog Fence and Training Collar System comes with a **1 Year Limited Warranty** from the date of purchase.

For any questions, technical support, or warranty claims, please contact FULUPET customer service. Our support team is available 24/7 to assist you.

You can visit the official FULUPET Store on Amazon for more information and support: [FULUPET Store](#)