

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

Manuals.plus /

- › [Schulte](#) /
- › Schulte Turbo Bathroom Radiator Instruction Manual H1530 04

Schulte H1530 04

Schulte Turbo Bathroom Radiator Instruction Manual

Model: H1530 04

Brand: Gebrüder Schulte

INTRODUCTION

This manual provides essential information for the safe and efficient installation, operation, and maintenance of your Schulte Turbo Bathroom Radiator. Please read these instructions carefully before installation and retain them for future reference.

The Schulte Turbo Bathroom Radiator is designed to provide comfortable warmth and serve as a towel warmer in various rooms, including bathrooms, offices, attics, and living areas. It features a powder-coated steel construction and offers flexible connection options.



Image: Schulte Turbo Bathroom Radiator (Model H1530 04) in Alpine White, installed in a modern bathroom setting. The radiator is mounted vertically on a light grey wall, adjacent to a vanity with a mirror.

1. SETUP AND INSTALLATION

Important Safety Information: Installation should only be performed by a qualified professional in accordance with local building and plumbing codes. Ensure the main water supply is turned off before beginning installation.

1.1. Unpacking and Inspection

Carefully remove the radiator and all components from the packaging. Inspect for any signs of damage. Do not install if any damage is observed. Keep packaging materials away from children.

1.2. Included Components

Verify that all parts are present:

- 1 x Radiator

- 1 x Wall mounting accessories (brackets, screws, wall plugs)
- 1 x Bleed plug
- 1 x Blanking plug
- 1 x Printed assembly instructions (this manual)

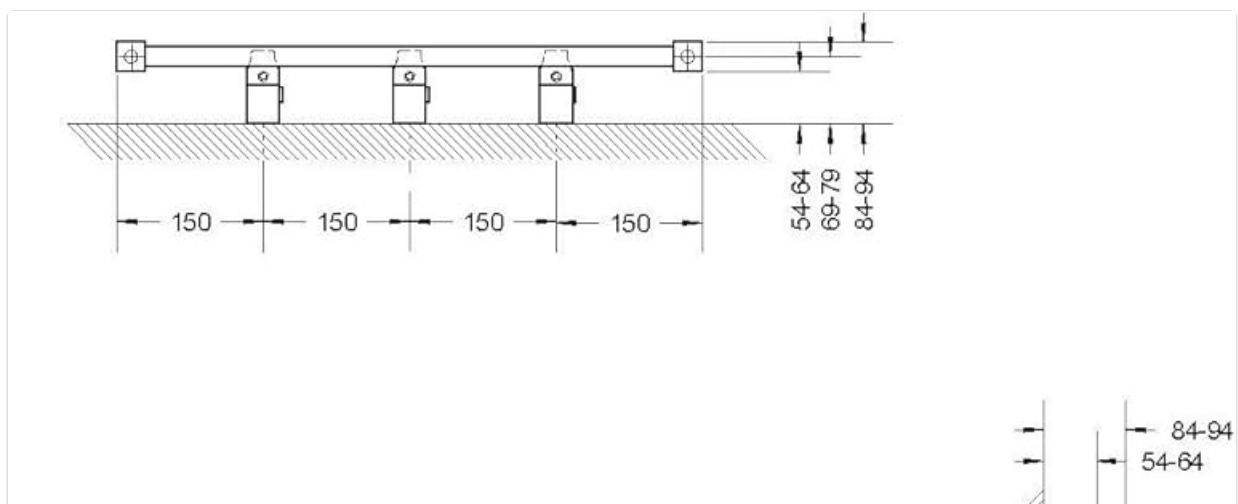


Image: Close-up view of a white plastic wall mounting bracket, part of the accessory kit for securing the radiator to the wall.

1.3. Mounting Location and Dimensions

Choose a suitable wall location, ensuring it can support the weight of the radiator when filled with water (approximately 12.5 kg dry weight). The radiator dimensions are 153 cm (height) x 60 cm (width).

The design allows for a 10 mm wall compensation, which facilitates installation even on walls with slight irregularities.



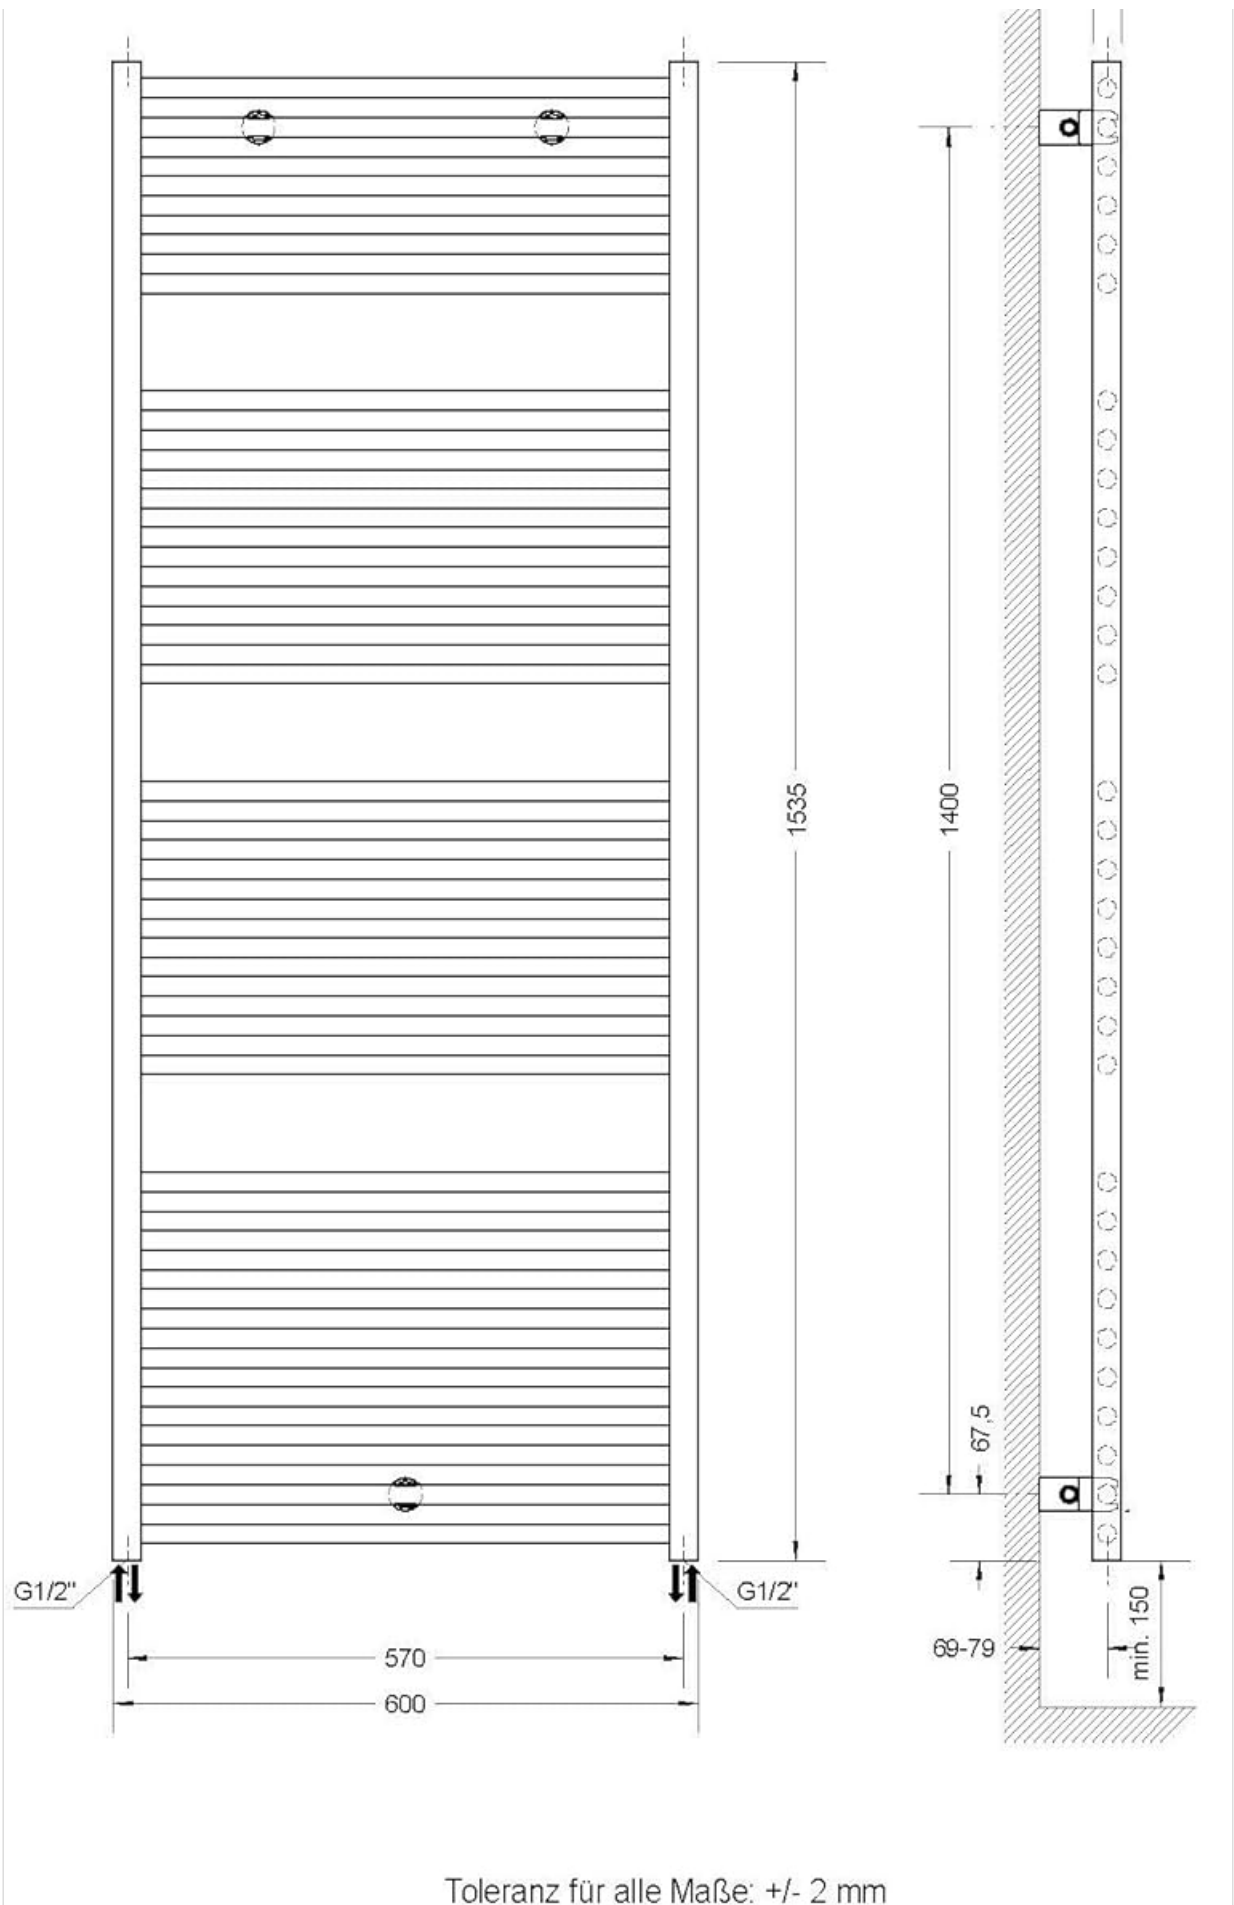


Image: Technical diagram illustrating the precise dimensions (1535mm height, 600mm width) and connection points (G1/2" threads) of the Schulte Turbo Bathroom Radiator. It also shows wall clearance and mounting bracket positions.

1.4. Wall Mounting

1. Mark the drilling points on the wall according to the provided template or the technical drawing.
2. Drill holes and insert appropriate wall plugs.
3. Attach the wall mounting brackets securely to the wall.
4. Carefully lift the radiator and hang it onto the installed brackets.
5. Secure the radiator to the brackets as per the detailed instructions in the printed manual.

1.5. Plumbing Connections

The radiator features connections on both sides at the bottom. Connect the flow and return pipes to the G1/2" threads. Ensure all connections are sealed properly to prevent leaks. Install the bleed plug and blanking plug in the designated openings at the top of the radiator.

2. OPERATING INSTRUCTIONS

The Schulte Turbo Bathroom Radiator is designed for versatile heating applications.

2.1. Filling and Bleeding

1. Once plumbing connections are complete, slowly open the water supply to fill the radiator.
2. Open the bleed plug at the top of the radiator using a radiator key. Allow air to escape until a steady stream of water emerges.
3. Close the bleed plug.
4. Check the system pressure and top up if necessary according to your heating system's requirements.

2.2. Heating Modes

This radiator is compatible with various heating systems:

- **Central Heating:** Connects directly to your existing central heating system.
- **District Heating:** Can be integrated into district heating networks.
- **Electric Operation:** Requires the installation of an electric heating element (not included) for standalone electric heating.
- **Mixed Operation:** Combines central heating with an electric heating element for year-round use, even when the central heating is off.

2.3. Towel Warmer Function

The horizontal bars of the radiator are designed to warm and dry towels. Hang towels evenly across the bars to ensure efficient heat transfer and drying.

3. MAINTENANCE

Regular maintenance ensures optimal performance and longevity of your radiator.

3.1. Cleaning

Clean the radiator regularly with a soft, damp cloth. Do not use abrasive cleaners, solvents, or harsh chemicals, as these can damage the powder-coated finish. For stubborn dirt, a mild soap solution can be used, followed by wiping with a clean, damp cloth.

3.2. Bleeding the Radiator

If the radiator does not heat evenly or makes gurgling noises, it may contain air. Bleed the radiator as described in section

2.1. This should be done periodically, especially at the beginning of the heating season.

3.3. Annual Inspection

It is recommended to have your heating system, including the radiator, inspected annually by a qualified professional to ensure all components are functioning correctly and efficiently.

4. TROUBLESHOOTING

This section addresses common issues you might encounter with your radiator.

4.1. Radiator Not Heating

- **No heat:** Check if the heating system is operational and the thermostat is set correctly.
- **Partially cold:** The radiator may contain air. Bleed the radiator (see section 2.1).
- **No water flow:** Ensure all valves are fully open. Check system pressure.

4.2. Leaks

- **Minor drips:** Tighten connections carefully. Do not overtighten.
- **Persistent leaks:** Immediately turn off the water supply to the radiator and contact a qualified plumber.

4.3. Unusual Noises

- **Gurgling/Hissing:** Indicates air in the system. Bleed the radiator (see section 2.1).
- **Knocking:** May be caused by water hammer or pipe expansion. Consult a heating professional.

5. SPECIFICATIONS

Schulte Turbo Bathroom Radiator (Model H1530 04)

Brand	Gebrüder Schulte
Model Number	H1530 04
Dimensions (H x W x D)	153.5 cm x 60 cm x 9.4 cm
Weight	12.5 kg (empty)
Material	Powder-coated steel
Color	Alpine White
Wattage (Heat Output)	886 watts
Maximum Pressure	10 Bar
Connection Type	Standard connection, bottom side (G1/2" threads)
Included Components	Radiator, wall mounting accessories, bleed plug, blanking plug, assembly instructions

6. WARRANTY INFORMATION

Gebrüder Schulte provides a manufacturer's warranty for this product. Please refer to the specific warranty terms and

conditions provided with your purchase documentation or visit the official Schulte website for detailed information. Keep your proof of purchase for warranty claims.

7. CUSTOMER SUPPORT

For technical assistance, spare parts, or further inquiries, please contact Gebrüder Schulte customer service. Contact details can typically be found on the manufacturer's website or in your purchase documentation.

Website: www.schulte.de

When contacting support, please have your model number (H1530 04) and purchase date available.