

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

- › [Gorilla](#) /
- › [Gorilla Heavy Duty Spray Adhesive User Manual](#)

Gorilla 6301502

Gorilla Heavy Duty Spray Adhesive Instruction Manual

Model: 6301502

1. PRODUCT OVERVIEW

Gorilla Heavy Duty Spray Adhesive is a versatile, multi-purpose adhesive designed for strong, permanent bonds. It is formulated to be moisture resistant and suitable for both indoor and outdoor projects. The adhesive dries clear and is photo-safe, ensuring your projects maintain their aesthetic appeal without yellowing.

Key features include:

- **Heavy Duty Bond:** Forms a clear, permanent bond.
- **Easy to Use:** Features a comfort nozzle for controlled, fine mist application.
- **Dries Clear:** Non-yellowing formula maintains project appearance.
- **Indoor/Outdoor Use:** Moisture resistant for diverse applications.
- **Photo-Safe:** Safe for use with photographs.



Figure 1: Gorilla Heavy Duty Spray Adhesive product can.

2. WHAT'S IN THE BOX

- One (1) 14 ounce can of Gorilla Heavy Duty Spray Adhesive.

3. SETUP AND PREPARATION

3.1 Surface Preparation

Ensure all surfaces to be bonded are clean, dry, and free of dirt, grease, and oil. It is crucial to protect surrounding areas from overspray to prevent unintended adhesive residue.

3.2 Compatible Materials

This adhesive is suitable for bonding a wide variety of materials, including:

- Wood
- Metal
- Fabric
- Foam
- Plastic** (see warnings below)
- Cardboard
- Paper
- Glass
- Leather

****Note:** Not recommended for use on polypropylene (PP) or polyethylene (PE) plastics, vinyl, or any type of rubber with high oil or plasticizer content. Not for use on food contact surfaces. Do not use for bonding weighted materials.



Figure 2: Applying adhesive to fabric for bonding.

4. OPERATING INSTRUCTIONS

4.1 Application

1. **Shake Can:** Shake the can well before each use to ensure proper mixing of contents.
2. **Spray Application:** Hold the can 6 to 8 inches away from the surfaces to be bonded. Apply an even coat of adhesive.

4.2 Bonding Types

- **For Maximum Bond Strength:** Spray both surfaces to be joined. Allow the adhesive to dry to a tacky state (approximately 1 minute). Once tacky, press the surfaces firmly together.
- **For Repositionable Bonds:** Apply a light, even coat to only one surface. Allow it to dry for 1-3 minutes before joining. The bond will remain repositionable for up to 10 minutes, depending on the surface type, before becoming permanent. To

remove, gently peel from a corner.

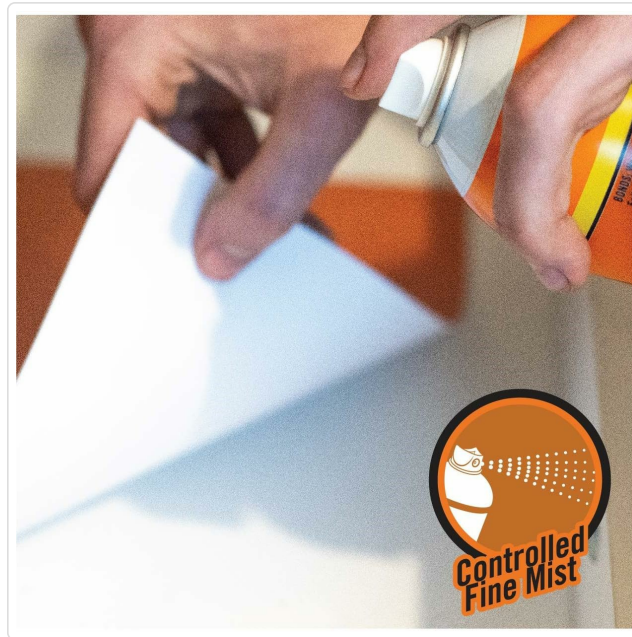


Figure 3: Demonstrating the controlled fine mist spray on paper.

5. USAGE TIPS

- **Prevent Clogging:** To avoid possible clogging of the nozzle, turn the can away from your body, turn it upside down, and spray a short jet of clear gas after completing each use.
- **Clear Drying:** The adhesive dries clear and does not yellow, making it ideal for projects where appearance is critical.



Figure 4: The adhesive dries clear, maintaining the original color of materials.

6. STORAGE AND MAINTENANCE

After each use, wipe the nozzle with a dry cloth and replace the cap securely. Store Gorilla Spray Adhesive in a cool, dry place, away from direct sunlight and temperatures above 120°F (49°C). This is a flammable adhesive and should not be used or stored near heat, sparks, flames, or while smoking.

7. SAFETY INFORMATION

DANGER: Vapor harmful. Extremely flammable. Vapors may cause flash fire. Contents under pressure. Vapor harmful. Eye & skin irritant. Read cautions on back panel.

- Keep out of reach of children.
- Use in a well-ventilated area.
- Avoid contact with eyes and skin. In case of contact, flush immediately with plenty of water.
- Do not puncture or incinerate can.
- Direct UV exposure may affect color of the adhesive over time.

8. SPECIFICATIONS

Attribute	Detail
Product Dimensions	2.5 x 2.5 x 9.5 inches
Item Weight	14 ounces
Item Model Number	6301502
Manufacturer	Gorilla Glue
Item Form	Spray
Compatible Materials	Foam, Wood, Glass, Leather, Paper, Metal, Fabric, Cardboard
Country of Origin	USA

9. TROUBLESHOOTING

For common issues such as clogging or insufficient bond strength, please refer to the 'Usage Tips' and 'Application' sections. Ensure proper surface preparation and application techniques are followed. If problems persist, contact Gorilla customer support.

10. WARRANTY AND SUPPORT

For information regarding product warranty or to contact customer support, please visit the official Gorilla Glue website or refer to the contact details provided on the product packaging. Keep your purchase receipt for warranty claims.

Related Documents - 6301502

