

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

> [ANJIELO SMART](#) /

> [ANJIELO SMART Wired Video Intercom System \(Model 66012+67024B\) - Instruction Manual](#)

ANJIELO SMART 66012+67024B

ANJIELO SMART Wired Video Intercom System

MODEL: 66012+67024B - INSTRUCTION MANUAL

Introduction

This manual provides detailed instructions for the installation, operation, and maintenance of your ANJIELO SMART Wired Video Intercom System. This system features a 7-inch color touch monitor and a 1080P doorbell camera, designed to enhance your home security and communication. Please read this manual thoroughly before using the product to ensure proper functionality and safety.

Package Contents

Verify that all items listed below are included in your package:

- 1 x Outdoor Doorbell Camera
- 2 x Indoor 7-inch Touch Monitors
- Power Adapters for Monitors
- Mounting Screws and Hardware
- Wiring Cables
- User Manual (this document)

Specifications

Feature	Description
Video Capture Resolution	1080p
Indoor Monitor	7-inch HD IPS Touch Screen, Acrylic Wire Drawing Panel
Outdoor Doorbell Camera	1080P FHD, 140° Wide Angle, 2 White LEDs for Night Vision, IP65 Weatherproof, Anti-destructive Metal Material
Connectivity	Wired, Supports Wi-Fi for Tuya Smart / Smart Life App
Intercom Mode	Hands-free dual-way communication, Room-to-Room Intercom

Storage	Built-in memory for 86 pictures, supports external Max. 128GB SD Card (not included)
Security Features	Motion Detection, Anti-Tamper Alarm, Dual Door Unlock Support (Electric Lock)
Power Supply	External power DC15V 1.2A
Operating Temperature	-45°C to +60°C
Dimensions (Monitor)	7 x 5 x 0.7 inches

Setup Guide

Follow these steps to set up your ANJIELO SMART Video Intercom System:

- 1. Mounting the Doorbell Camera:** Install the outdoor doorbell camera at your desired location using the provided screws and hardware. Ensure it is within reach of your existing doorbell wiring or a new wired connection.
- 2. Mounting the Indoor Monitors:** Install the indoor monitors at convenient locations within your home.
- 3. Wiring Connections:** Connect the doorbell camera to the indoor monitors using the provided wiring. Refer to the wiring diagram in the separate installation guide for specific connections. Ensure all connections are secure.
- 4. Power Connection:** Connect the power adapters to the indoor monitors and plug them into a power outlet. The system will power on automatically.
- 5. App Download and Connection:**
Download the **Tuya Smart** or **Smart Life** app from your mobile device's app store. Once installed, open the app and follow the on-screen instructions to add your device. You will typically scan a QR code displayed on the indoor monitor to bind the app to your system.

Easy internet connection

Scan QR code on the monitor to bind the APP



Image: Easy internet connection via QR code scanning on the monitor to bind the mobile app.

Operating Instructions

This section details the various functions and operations of your intercom system.

Product Overview and Key Functions

Video: This product overview demonstrates making calls from the doorbell to monitors, two-way intercom functionality, controlling door and gate locks, transferring calls between outdoor units and indoor monitors, switching between CCTV camera views, enabling motion detection, displaying weather forecasts, and reviewing recorded media.

1. Two-Way Intercom

When a visitor presses the doorbell, the indoor monitor will ring and display the visitor's image. You can engage in two-way audio communication with the visitor. If you are away, notifications will be sent to your mobile device via the app, allowing you to communicate remotely.

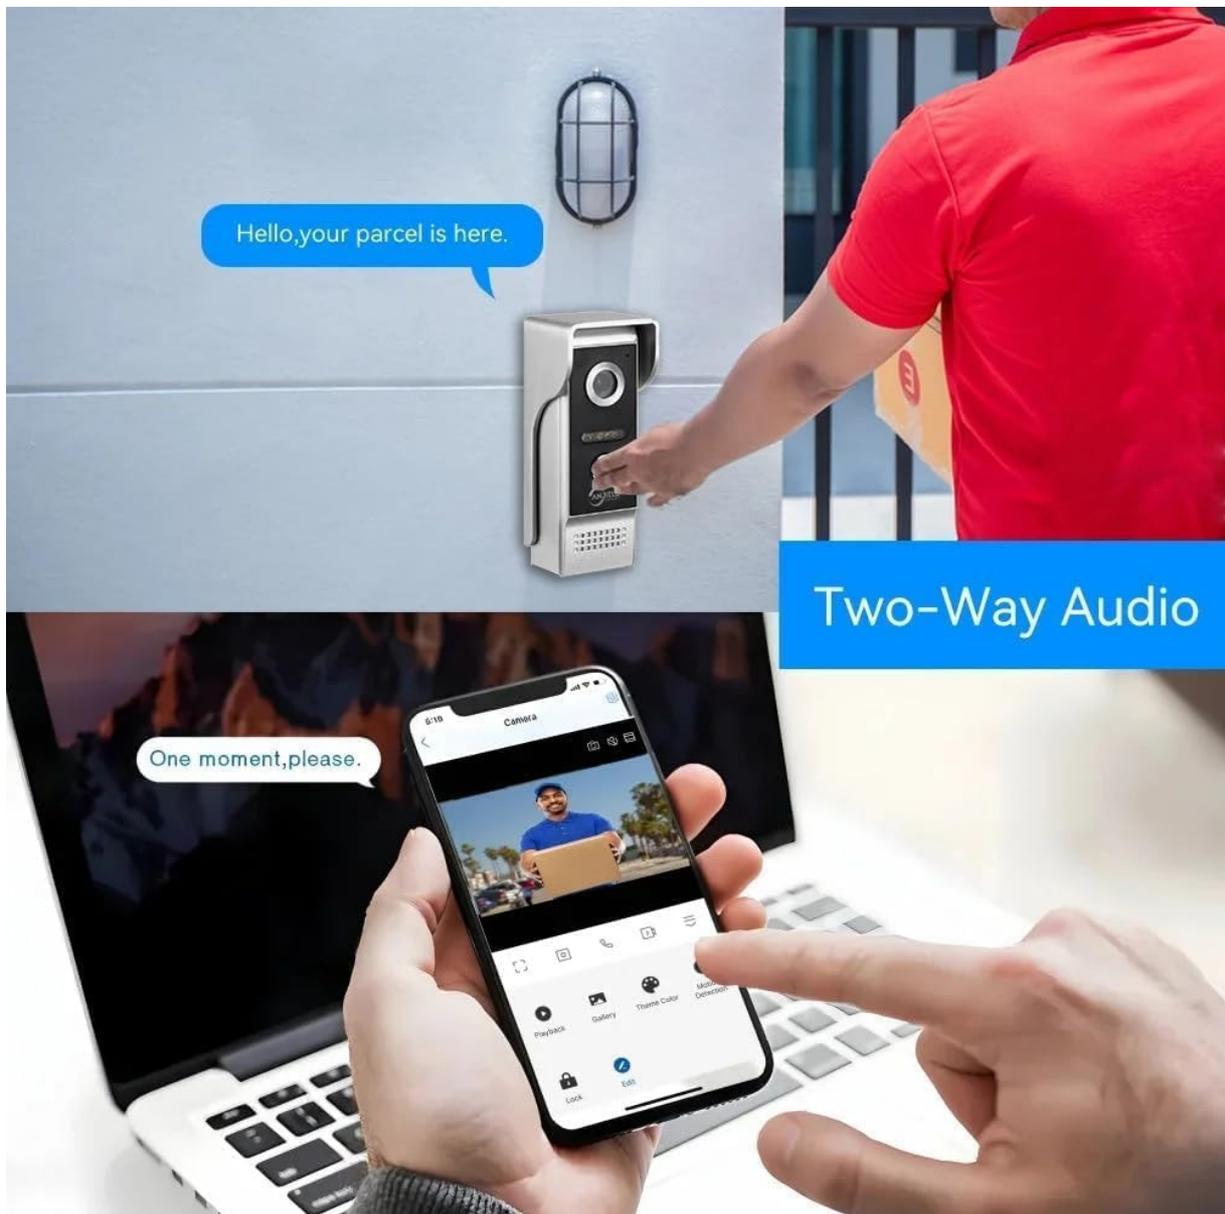


Image: Two-way audio communication between the outdoor doorbell and an indoor monitor or mobile device.

2. Remote View and Unlock via App

With the Tuya Smart / Smart Life app, you can view your doorstep from anywhere, anytime. The app also allows you to remotely unlock connected electric locks for visitors or deliveries.

APP View and Remote Unlock

Download "Tuya Smart" APP, see out of your door anytime, anywhere.

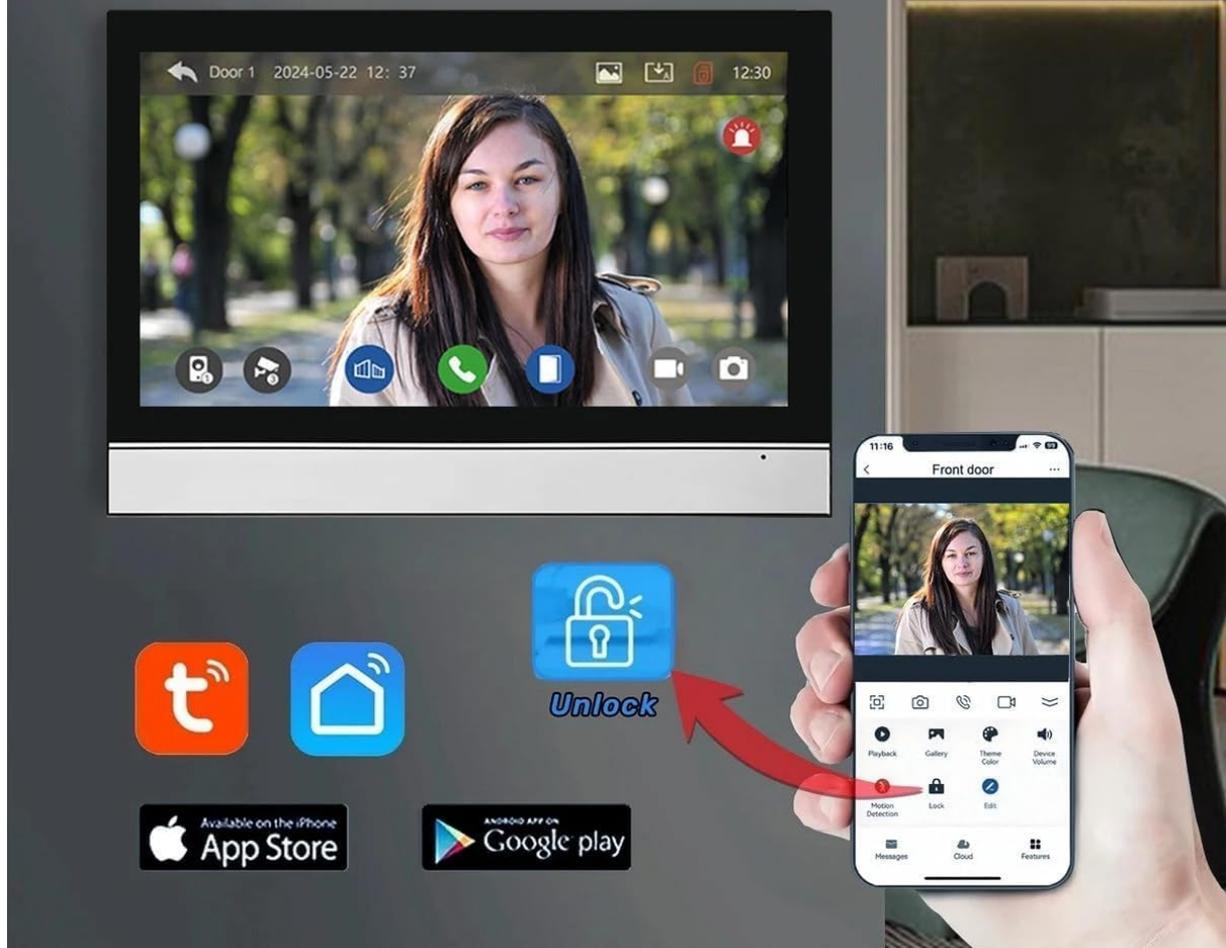


Image: Remote viewing and unlocking functionality through the mobile application.

3. Motion Detection and Automatic Recording

The system is equipped with motion detection. When motion is detected or the doorbell is pressed, the camera will automatically record videos or capture snapshots. These recordings are saved to the additional Micro SD card (32GB card included) and can be reviewed on your mobile phone or the indoor monitor.

4. Anti-Tamper Alarm

The system includes an anti-tamper alarm function. If the outdoor unit is tampered with, an alarm will be triggered, and alerts will be sent to your mobile phone, providing an additional layer of security.



Image: The system supports a siren alarm feature for enhanced security against tampering.

5. Night Vision

The outdoor doorbell camera features 2 white LEDs for night vision, ensuring clear visibility even in low-light or dark conditions. This allows you to identify visitors at any time.



Image: Infrared night vision ensures clear visibility and detail capture even in complete darkness.

6. Dual Lock Control

The indoor monitor supports one-button operation to switch between and control two connected electric locks, such as a main door lock and a patio gate lock.

One-button operation to switch on the double-lock mode of the indoor unit



Patio Locks



Door Locks

Image: One-button operation on the indoor unit to control double-lock modes for patio and door locks.

7. Multi-Device Usage and Expansion

The system is expandable, supporting connections for up to 2 outdoor doorbell cameras, 4 indoor monitors, and 2 additional 1080P AHD CCTV cameras for comprehensive security coverage.

System capacity with 2 door stations+4 monitors+2 CCTV cameras

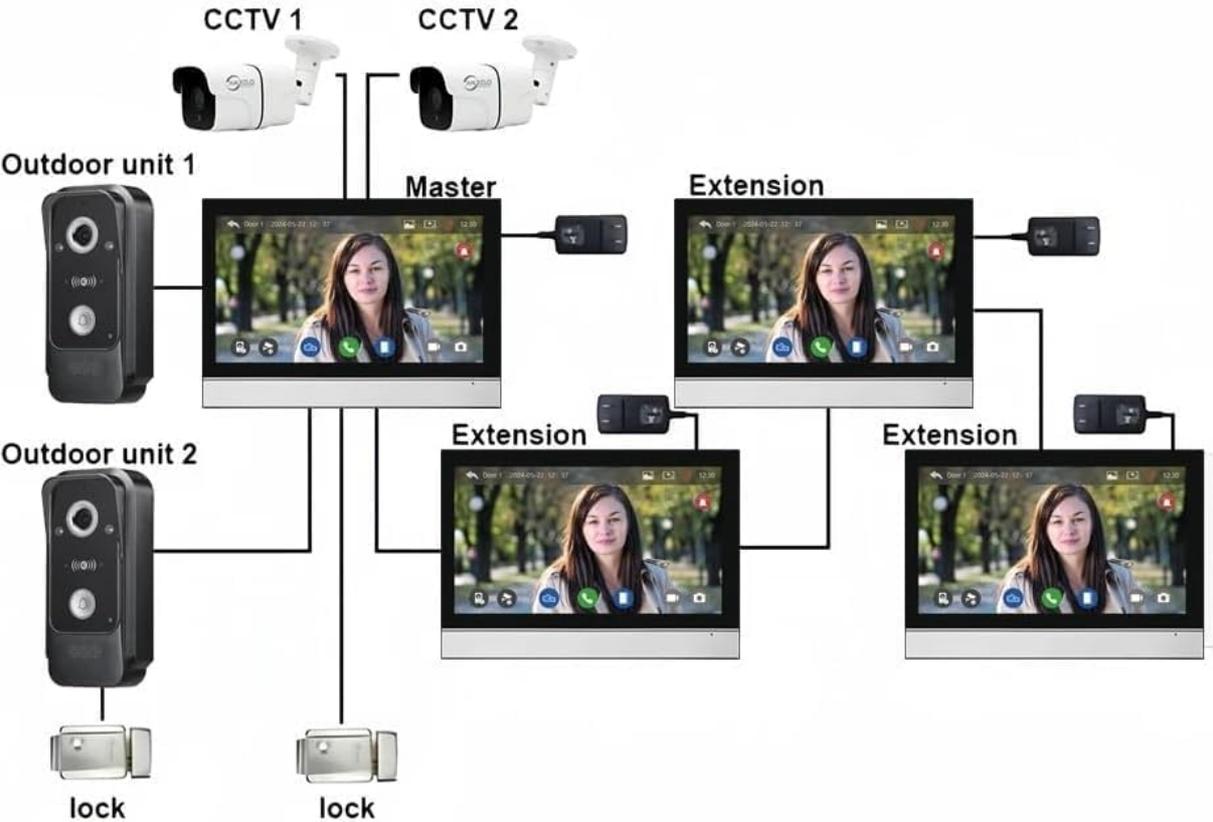


Image: System capacity diagram showing connections for multiple door stations, monitors, and CCTV cameras.

8. Weatherproof Outdoor Unit

The outdoor doorbell camera is IP65 rated, making it waterproof and dustproof. It is designed to withstand various weather conditions with a high-performance temperature resistance from -45°C to +60°C.

IP 65 Waterproof

Operation Temp: -40°C~+50°C



Image: The outdoor doorbell unit features an IP65 waterproof rating, suitable for various weather conditions.

Maintenance

To ensure optimal performance and longevity of your ANJIELO SMART Video Intercom System, follow these maintenance guidelines:

- **Cleaning:** Regularly wipe the indoor monitors and outdoor doorbell camera with a soft, dry cloth. Avoid using abrasive cleaners or solvents that could damage the surfaces.
- **Check Connections:** Periodically inspect all wired connections to ensure they are secure and free from corrosion or damage.
- **Software Updates:** Check the Tuya Smart / Smart Life app or the manufacturer's website for any available firmware updates for your system. Keeping the software updated can improve performance and add new features.
- **SD Card Management:** If using an SD card for recording, periodically review and manage stored footage to ensure sufficient space is available.

Troubleshooting

If you encounter issues with your intercom system, refer to the following common troubleshooting steps:

- **No Power:** Ensure all power adapters are securely plugged into both the monitors and working power outlets. Check circuit breakers if necessary.
- **No Video/Audio:** Verify all wiring connections between the doorbell camera and monitors are correct and secure. Restart the system by unplugging and replugging the power.
- **App Connectivity Issues:** Ensure your Wi-Fi network is active and the monitors are connected. Restart your router and the monitors. Re-attempt the app binding process if needed.
- **Poor Night Vision:** Ensure the camera lens is clean and free from obstructions.
- **Motion Detection Not Working:** Check the settings on your indoor monitor and the mobile app to ensure motion detection is enabled and configured correctly.
- **Door/Gate Unlock Failure:** Verify that the electric locks are correctly wired to the system and are receiving power. Check the unlock duration settings on the monitor.

For further assistance, please contact ANJIELO SMART customer support.

Warranty and Support

Your ANJIELO SMART Wired Video Intercom System is covered by a manufacturer's warranty. Please refer to the warranty card included in your package or visit the official ANJIELO SMART website for detailed warranty terms and conditions.

For technical support, product inquiries, or warranty claims, please contact ANJIELO SMART customer service through their official channels. Keep your purchase receipt and product model number (66012+67024B) handy when contacting support.

Online Support: [Visit the ANJIELO SMART Store on Amazon](#)