

T POWER PRO-qZ9-ELS

T-Power 19V AC/DC Adapter Charger for JMGO Projectors

Model: PRO-qZ9-ELS

1. INTRODUCTION

This manual provides essential information for the safe and effective use of your T-Power 19V AC/DC Adapter Charger. This power supply is designed to provide reliable power to compatible JMGO Nut N7L, G3, J6, P2, J6S, G3pro, E8, and C6 Full HD Smart Home Cinema Video Projectors. Please read this manual thoroughly before use and retain it for future reference.

2. PRODUCT OVERVIEW

The T-Power AC/DC Adapter Charger consists of the main adapter unit and a detachable power cord. It converts standard AC wall power to the required DC voltage for your projector.



Image: The T-Power 19V AC/DC Adapter Charger connected to its power cord, ready for use.



Image: The T-Power 19V AC/DC Adapter Charger shown alongside its detachable power cord.

3. SAFETY INFORMATION

Your T-Power adapter is designed with multiple safety features to protect your device and ensure safe operation. Always use the adapter as intended.

- **Over-Current Protection:** Prevents damage from excessive current flow.
- **Over-Temperature Protection:** Safeguards against overheating.
- **Over-Voltage Protection:** Protects against voltage surges.

- **Short Circuit Protection:** Prevents damage in case of a short circuit.
- **Electrostatic Protection:** Minimizes risk from electrostatic discharge.
- **Magnetic Field Protection:** Shields against magnetic interference.





Over-Current Protection



Over-Temp Protection



Over-Voltage Protection



Short Circuit Protection

SUPERIOR SAFETY POWER ADAPTER



Warm Tips


Please check our compatible Model List and Notice. Make sure the Model# or Part# match your device.

please feel free to contact us for any inquiries



Professional of Power Adapters

T-Power adapters are tested on the original device to ensure compatibility. Certified by T-power technicians 100% compatible.



Safety Features with Safety certified

Safeguards against incorrect voltage, short circuit, and internal overheating. (CE/FCC/RoHS certified)



Reinforced Power Cord

Long lasting DC cord for your convenience and charge your device.

T-Power is a globally trusted provider of premier power supplies and power supply products.



30-Day Return for Any Reason

You may return your undamaged product and packaging within 30 days of purchase to receive a FULL REFUND for any reason.



12-Month Warranty

We will take care of all quality-related issues, **Easy Exchang** with a REPLACEMENT including any return shipping costs.



Technical Support

Received the wrong item?
Looking for Charger for your device?
Adapter tip doesn't fit your device?
We can help, just let us know.

Image: Visual representation of the adapter's superior safety features, including protection against over-current, over-temperature, over-voltage, and short circuits.

T POWER offers a massive in stock AC/DC Power adapter selection. You get to choose a power adapter from the industry's leading manufacturers.

We offer a variety of power adapter form factors to meet the specific needs of any power adapter application. Whether you are searching a power adapter for Home, Office, School, Led Light, Printer, Wi-Fi Router, Vacuum-cleaner , any digital devices. we have the ideal power adapter solution.



Safety Protection



Short circuit Protection



Overheating Protection



Overcurrent Protection



Electrostatic Protection



Magnetic Field Protection



Overvoltage Protection

Image: A graphic detailing the comprehensive safety protections integrated into the adapter, such as short circuit, overheating, overcurrent, electrostatic, magnetic field, and overvoltage protection.

4. SETUP INSTRUCTIONS

1. **Verify Compatibility:** Before connecting, ensure your JMGO projector model (e.g., N7L, G3, J6, P2, J6S, G3pro, E8, C6) requires a 19V DC input and has a compatible barrel connector. Refer to your projector's manual for specific power requirements.
2. **Connect Power Cord:** Insert the detachable power cord firmly into the AC input port of the T-Power adapter.
3. **Connect to Projector:** Plug the barrel connector end of the adapter's output cable into the DC input port of your JMGO projector.
4. **Connect to Wall Outlet:** Plug the other end of the power cord into a standard AC 100-240V wall outlet.
5. **Power On:** Once all connections are secure, you can power on your projector according to its operating instructions.

5. OPERATING INSTRUCTIONS

The T-Power adapter operates automatically once connected. It provides a stable 19V DC output to your compatible JMGO projector. No user intervention is required for its operation.

- Ensure the adapter is placed in a well-ventilated area to prevent heat buildup.
- Avoid covering the adapter during operation.
- Disconnect the adapter from the wall outlet when not in use for extended periods.

6. MAINTENANCE

Proper maintenance ensures the longevity and safe operation of your T-Power adapter.

- **Cleaning:** Disconnect the adapter from all power sources before cleaning. Use a soft, dry cloth to wipe the exterior. Do not use liquid cleaners or solvents.
- **Storage:** Store the adapter in a cool, dry place away from direct sunlight and extreme temperatures. Avoid tightly coiling the cables to prevent damage.
- **Inspection:** Periodically inspect the adapter and cables for any signs of damage, such as frayed wires, cracked casing, or bent connectors. If damage is found, discontinue use immediately and replace the adapter.

Longer Lifespan

Tested to withstand 10,000 bends

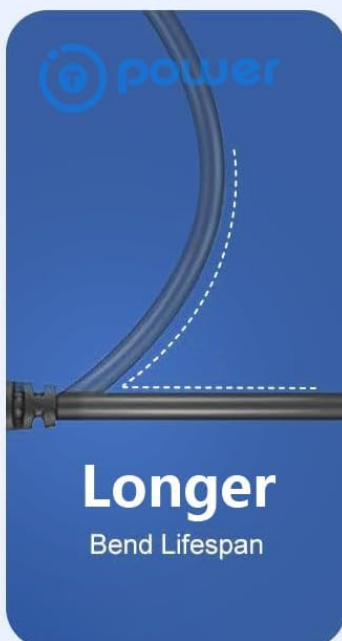


Image: Features contributing to the adapter's longer lifespan, including a reinforced cord tested for durability and high-quality materials.

7. TROUBLESHOOTING

If you encounter issues with your T-Power adapter, refer to the following common solutions:

Problem	Possible Cause	Solution
Projector not receiving power	Loose connection, faulty outlet, incompatible adapter, damaged cable.	Ensure all connections are secure. Test the wall outlet with another device. Verify adapter compatibility with your projector model. Inspect cables for damage; replace if necessary.
Adapter feels excessively hot	Poor ventilation, overloading, internal fault.	Ensure the adapter is in a well-ventilated area and not covered. Disconnect and allow to cool. If overheating persists, discontinue use and contact support.
Intermittent power to projector	Loose connection, damaged cable, internal adapter issue.	Check all connections. Inspect cables for damage. If the issue persists, the adapter may need replacement.

If these steps do not resolve the issue, please contact T-Power customer support for further assistance.

8. SPECIFICATIONS

- **Model Number:** PRO-qZ9-ELS
- **Input Voltage Range:** AC 100V - 240V
- **Output Voltage:** 19 Volts DC
- **Amperage:** 5 Amps
- **Connector Type:** Barrel Connector
- **Item Weight:** 4 Ounces (approx. 113 grams)
- **Item Dimensions:** 4 x 4 x 2 inches (approx. 10.16 x 10.16 x 5.08 cm)
- **Certifications:** CE, FCC, RoHS compliant

9. WARRANTY AND SUPPORT

This T-Power adapter comes with a **60-day limited warranty** from the date of purchase. This warranty covers manufacturing defects under normal use. It does not cover damage caused by misuse, accidents, unauthorized modifications, or external causes.

For warranty claims, technical support, or any inquiries, please contact T-Power customer service. You can typically find contact information on the product packaging or the retailer's website where the product was purchased. Please have your model number (PRO-qZ9-ELS) and proof of purchase ready when contacting support.

