

Mapei Ultracolor Plus FA

Mapei Ultracolor Plus FA Grout Instruction Manual

1. PRODUCT OVERVIEW

Mapei Ultracolor Plus FA with DropEffect technology is an ultra-premium, fine aggregate, fast-setting, polymer-modified, color-consistent, non-shrinking, efflorescence-free grout. It is designed for joint widths from 1/16" to 3/4" (1.5 to 19 mm).

The innovative DropEffect technology reduces surface absorption, helping to repel water, dirt, and grime from penetrating grout joints. Ultracolor Plus FA is formulated with Mapei's High-Hydrated Cement Technology (HCT) to address common issues associated with Portland-cement grout, such as color inconsistency and efflorescence. HCT also contributes to higher polymer content, reduced absorption, and increased stain resistance compared to standard cement grouts.

This product contains 10% recycled content and meets the ANSI A138.1 specification for GreenSquared certification.



Image 1.1: Front view of a 25 lbs bag of Mapei Ultracolor Plus FA Grout, highlighting key features and certifications.

2. SAFETY INFORMATION

Always read and follow all safety instructions and warnings provided on the product packaging before use. This product contains cement and may cause irritation to eyes and skin. Inhalation of dust may be harmful.

- Wear appropriate personal protective equipment (PPE), including safety glasses, gloves, and a dust mask, during mixing and application.
- Avoid contact with eyes and skin. In case of contact, rinse immediately with plenty of water and seek medical advice.

- Ensure adequate ventilation when working in enclosed spaces.
- Keep out of reach of children and pets.
- Do not ingest. If swallowed, seek immediate medical attention.

For detailed safety data sheets (SDS), please refer to the Mapei website or contact Mapei technical support.

3. PREPARATION

3.1 Surface and Joint Preparation

- Ensure all tile adhesive has cured completely according to the manufacturer's instructions before grouting.
- Grout joints must be clean, dry, and free from any loose debris, dust, or contaminants.
- Remove any spacers or shims from the tile joints.
- The depth of the grout joint should be consistent and at least 2/3 the thickness of the tile.

3.2 Environmental Conditions

- Maintain ambient and substrate temperatures between 50°F and 90°F (10°C and 32°C) during application and for at least 72 hours thereafter.
- Avoid direct sunlight or strong drafts during application, as this can lead to rapid drying and potential issues.

4. MIXING INSTRUCTIONS (SETUP)

Accurate mixing is crucial for achieving optimal performance and color consistency.

1. **Water Measurement:** Refer to the product packaging for the precise water-to-grout ratio. Typically, for a 25 lbs (11.3 kg) bag, you will need approximately 4.5 to 5.5 quarts (4.3 to 5.2 L) of clean, cool water. Always measure water accurately.
2. **Initial Mixing:** Pour the measured water into a clean mixing bucket. Gradually add the Ultracolor Plus FA grout powder while mixing with a low-speed drill (300 rpm or less) and a paddle mixer.
3. **Achieve Consistency:** Mix until a smooth, lump-free, and creamy consistency is achieved. Avoid over-mixing, which can entrain air and affect performance.
4. **Slake Time:** Allow the mixture to stand (slake) for 5 to 10 minutes. This allows the polymers to fully hydrate.
5. **Final Remix:** Remix the grout for 1 to 2 minutes without adding more water. The grout is now ready for application.

Note: Do not add any admixtures or Portland cement to Ultracolor Plus FA, as this will alter its properties and void the warranty.

5. APPLICATION (OPERATING)

Apply the grout using a rubber-faced grout float.

1. **Spread Grout:** Hold the grout float at a 45-degree angle and spread the grout diagonally across the tile surface, ensuring that the joints are completely filled.
2. **Work in Sections:** Work in manageable sections (e.g., 10 sq. ft. or 1 sq. meter) to prevent the grout from drying too quickly.

3. **Remove Excess:** After filling the joints, hold the float at a 90-degree angle and scrape off excess grout from the tile surface, moving diagonally to avoid pulling grout out of the joints.

6. CURING AND CLEANING (MAINTENANCE)

Proper curing and cleaning are essential for the longevity and appearance of the grouted surface.

6.1 Initial Cleaning

- Wait approximately 15 to 30 minutes after application, or until the grout has firmed up slightly.
- Using a damp (not wet) sponge, gently wipe the tile surface in a circular motion to remove grout haze. Rinse the sponge frequently in clean water.
- Avoid using excessive water, as this can lead to color variation or efflorescence.

6.2 Final Cleaning and Curing

- After 24 hours, a slight haze may remain. This can be removed with a clean, dry cloth or a specialized grout haze remover if necessary. Always test haze removers in an inconspicuous area first.
- Protect the grouted area from heavy traffic and moisture for at least 72 hours.
- Full cure and maximum stain resistance are typically achieved in 21 to 28 days.

7. TROUBLESHOOTING

Addressing common issues during and after grouting.

- **Inconsistent Color:** Often caused by inconsistent water ratios during mixing, over-watering during cleaning, or uneven drying conditions. Ensure precise water measurement and consistent cleaning techniques.
- **Efflorescence:** White powdery residue on the grout surface. While Ultracolor Plus FA is designed to be efflorescence-free, excessive water during mixing or cleaning, or moisture from the substrate, can contribute to it. Ensure proper mixing and cleaning, and address any substrate moisture issues.
- **Cracking:** Can result from insufficient joint depth, movement in the substrate, or improper mixing (too dry). Ensure joints are adequately deep and the substrate is stable.
- **Grout Haze:** A film left on the tile surface after cleaning. Typically removed with a second cleaning pass using a clean, damp sponge or a specialized haze remover.

If problems persist, consult Mapei technical support or a qualified professional.

8. SPECIFICATIONS

Key technical specifications for Mapei Ultracolor Plus FA Grout.

Specification	Detail
Brand	Mapei
Model	Ultracolor Plus FA
Material	Polymer-Modified Cement
Item Weight	25 Pounds (11.3 kg)

Specification	Detail
Joint Width	1/16" to 3/4" (1.5 to 19 mm)
Water Resistance Level	Water Resistant
First Available	December 27, 2017

Mapei	WHITE	Mapei	**TERRA COTTA
Mapei	ALABASTER	Mapei	AVALANCHE
Mapei	PEWTER	Mapei	IVORY
Mapei	BAHAMA BEIGE	Mapei	**IRISH CREAM
Mapei	CHAMOIS	Mapei	MOCHA
Mapei	HARVEST	Mapei	PALE UMBER
Mapei	CHOCOLATE	Mapei	**SLATE
Mapei	GRAY	Mapei	CHARCOAL
Mapei	BLACK	Mapei	LIGHT ALMOND
Mapei	SAHARA BEIGE	Mapei	**MAGNOLIA
Mapei	BISCUIT	Mapei	**CAMEL
Mapei	**MALT	Mapei	FROST
Mapei	PEARL GRAY	Mapei	COCOA
Mapei	**SUMMER TAN	Mapei	WARM GRAY
Mapei	SILVER	Mapei	STRAW
Mapei	**GREEN TEA	Mapei	**SAND
Mapei	NAVAJO BROWN	Mapei	**WATERFALL


Image 8.1: Mapei Ultracolor Plus FA Grout color chart, displaying various available colors including Harvest.


9. WARRANTY AND SUPPORT

Specific warranty details for Mapei Ultracolor Plus FA Grout are not provided within this manual. For comprehensive warranty information, please refer to the official Mapei website or the product packaging.

For technical assistance, product inquiries, or support, please contact Mapei customer service directly through their official channels. Always provide the product name and batch number when seeking support.

Related Documents - Ultracolor Plus FA


	<u>MAPEI ANSI A118.15 Tile and Stone Mortars: High-Performance Solutions</u> Comprehensive guide to MAPEI's ANSI A118.15 compliant tile and stone mortars. Details product features, benefits, industry standards (ISO 13007, ANSI), and technical requirements for high-performance installations in challenging environments. Includes Granirapid, Ultraflex, and Ultralite product lines.
	<u>MAPEI Flexcolor 4 LVT: Ready-to-Use Grout for Luxury Vinyl Tile</u> Technical data sheet for MAPEI Flexcolor 4 LVT, a ready-to-use grout formulated with fine aggregate for luxury vinyl tile (LVT) and luxury vinyl plank (LVP) installations. Details features, benefits, application, limitations, and technical specifications.
	<u>MAPEI Uncoupling Membrane Mortar: Premium Tile and Thin-Set Mortar for Large and Heavy Tiles</u> Technical data sheet for MAPEI Uncoupling Membrane Mortar, a premium dry-set mortar for large-and-heavy-tile and thin-set applications on floors and walls. Includes features, specifications, application instructions, and industry approvals.
	<u>Mapei Mapelastick AquaDefense Zero: Flexible Waterproofing Membrane for Interior & Exterior Surfaces</u> Discover Mapei Mapelastick AquaDefense Zero, a ready-to-use, quick-drying, flexible liquid membrane for waterproofing bathrooms, balconies, and more. Learn about its features, application, and technical specifications.
	<u>Декларация за характеристиките на строителен продукт MAPEI Ultracolor Plus № 0015-BG</u> Официална декларация за характеристиките на строителния продукт MAPEI Ultracolor Plus (код на продукта 0015-BG), описваща показателите за ефективност и съответствието с EN 13888 и българските нормативни уредби.
	<u>MAPEI Ultrabond Eco VS60: Multifunktioneller Dispersionsklebstoff für Boden- und Wandbeläge</u> Technisches Datenblatt für MAPEI Ultrabond Eco VS60, ein Dispersionsklebstoff mit hoher Anfangshaftung für PVC-, Textil-, Linoleum- und Designbeläge an Böden und Wänden. Enthält Anwendungs-, technische und Sicherheitshinweise.

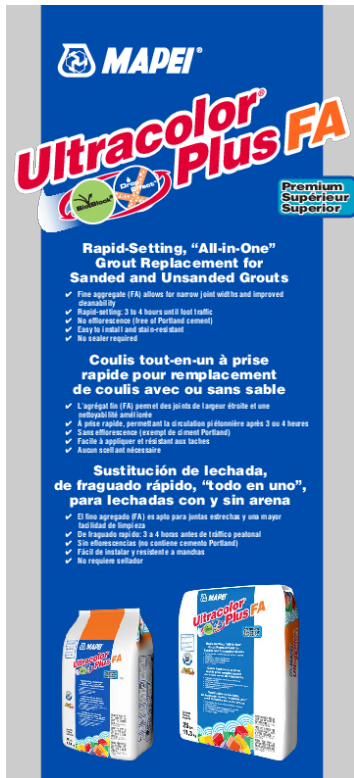

[pdf] Installation Guide Instructions Tech Sheet

21 2924 Ultracolor Plus FA Mobile Friendly English USA technical sheet Mapei 17 3000144 ultracolor plus fa instructions ac6ddd05386e4b808d18fe7dfddc64ed cdnmedia mapei docs librariesprovider10 products documents sfvrn ccd7cd31 0 |||

UltracoPlolurs FA Premium Suprieur Superior Rapid-Setting, All-in-One Grout Replacement for Sa ... most current product data and BEST-BACKEDSM warranty information, visit www.mapei.com. DESCRIPTION Ultracolor Plus FA with DropEffectTM technology is an ultra premium, fine-aggregate, fast-setting, p... lang:es score:52 filesize: 209.11 K page_count: 4 document date: 2021-11-19

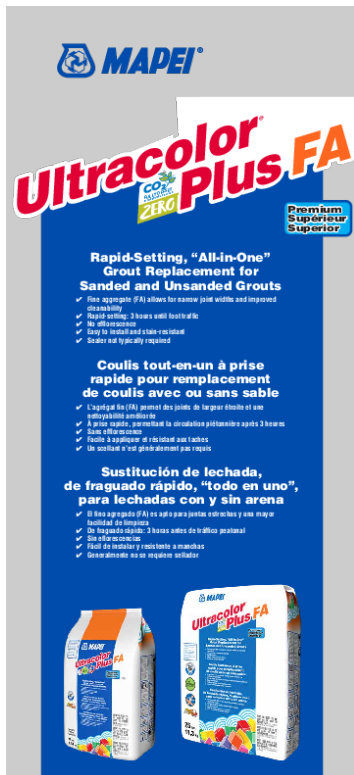

[pdf] Installation Guide Instructions

24 1074 Ultracolor Plus FA Mobile Friendly Installation Instructions 2248568 BuildSiteUltracolor is specially formulated with MAPEI s High Hydrated Cement Technology HCT™ to eliminate common problems such as color consistency and buildsite mapei |||

UltracoPlolurs FA IFNUTHLELENYTIROELFFESCYLELTE Premium Suprieur Superior Rapid-Setting, All ... most current product data and BEST-BACKEDSM warranty information, visit www.mapei.com. DESCRIPTION Ultracolor Plus FA with DropEffectTM technology and CO2 emissions fully offset in the product s lif... lang:es score:48 filesize: 371.26 K page_count: 4 document date: 2024-01-19




[pdf] User Manual

MAPEI 6BU523205 Installation Manual Ultracolor Plus FA 10 lb Night Sky 5232 All in one Grout

093994232052 64287316 lowes productdocuments 80a43b5d 508d 432c bee7 91ddc83604ba |||

Ultracolor Plus FA Rapid-Setting, All-in-One Grout Replacement for Sanded and Unsanded Grouts DESCRIPTION Ultracolor Plus FA with DropEffect™ technology and zero impact on climate change is an ultra premium, fine-aggregate, fast-setting, polymer-modified, color-consistent, nonshrinking, efflor...

lang:en score:45 filesize: 5.45 M page_count: 10 document date: 0000-00-00

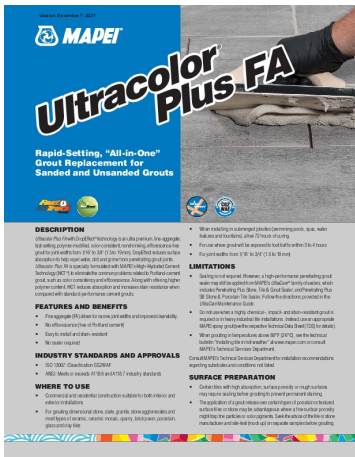


[pdf] User Manual Installation Guide

MAPEI 6BU500411 Installation Manual Ultracolor Plus FA 25 lb Bahama Beige All in one Sanded Grout

093994004116 07712000 lowes productdocuments 5d2a959c 96d1 449f 933c b8aeaa0c7b8c |||

Version: December 7, 2021 UltracoPlolurs FA Rapid-Setting, All-in-One Grout Replacement for Sanded and Unsanded Grouts DESCRIPTION Ultracolor Plus FA with DropEffect™ technology is an ultra premium, fine-aggregate, fast-setting, polymer-modified, color-consistent, nonshrinking, efflorescence-free...

lang:en score:44 filesize: 968.27 K page_count: 6 document date: 2021-12-08

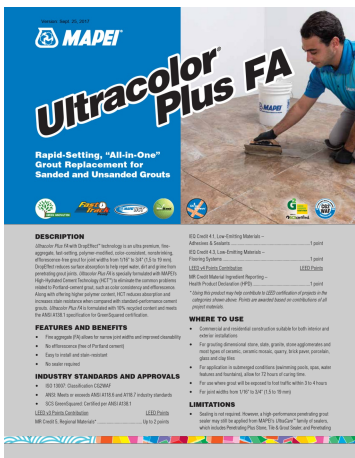

[pdf] User Manual Installation Guide Specifications Catalog

Ultracolor Plus FA 35 Navajo Brown 10 lb Grout Use and Care Manual Mapei 6BU003505 093994035059

0093994035059 1003913279 765e5e9f 68bd 43b7 84b4 c2abb1bebf54 images thdstatic catalog Images 76 |||

Version: Sept. 25, 2017 UltracoPlolurs FA Rapid-Setting, All-in-One Grout Replacement for Sanded and Unsanded Grouts DESCRIPTION Ultracolor Plus FA with DropEffect™ technology is an ultra premium, fineaggregate, fast-setting, polymer-modified, color-consistent, nonshrinking, efflorescence-free g...

lang:en score:43 filesize: 727.31 K page_count: 6 document date: 2017-09-25



[pdf] Installation Guide Specifications Guide

Ultracolor Plus FA SB Stone Porcelain Tile Sealer Follow the directions provided in UltraCare

Maintenance Guide Do not use when a highly chemical 07786116 lowes productdocuments 3b316458


2b72 4cd1 842c ea84b8a62e53 |||

Version: April 15, 2016 UltracoPlolurs FA Rapid-Setting, All-in-One Grout Replacement for Sanded and Unsanded Grouts DESCRIPTION Ultracolor Plus FA with DropEffect™ technology is an ultra premium, fineaggregate, fast-setting, polymer-modified, color-consistent, nonshrinking, efflorescence-free g...

lang:en score:43 filesize: 834.28 K page_count: 6 document date: 2016-11-04

ZIO & SONS + clé

USAGE	Y/N
interior floor	Y ^a
interior wall	Y ^a
exterior floor	N
exterior wall	N
residential heavy traffic	Y
commercial light traffic	Y
radiant heating compatible	Y
fireplace surround	Y
shower	Y ^a
steam shower	Y ^a
fountain waterlines	Y ^a
freeze thaw	N
pool waterlines	Y ^a
hvac/ductwork	N
sink backsplash	Y ^a
stove backsplash	Y ^a
grout tile	interior plus 1/2" flex/adhesive eq.
joint/gout size	but/joint or 3/16"
UV resistant	Y



[\[pdf\]](#) Instructions Dimension Guide


ZIO SONS clé instructions and Mapei Ultracolor Plus FA application cleanup to avoid the risk of staining grout haze allow for easy cleanability Read all installation thoroughly before use Using consistent procedures will produce results Trades zio sons Resource 041521 f hubspotusercontent40 net hubfs 169240

ZIO SONS cl USAGE Y/N interior floor Y* interior wall Y* exterior floor N exterior wall ... s and/or grouted areas then the sealant was not applied properly. GROUT cl ONLY recommends Mapei Ultracolor Plus FA grout for glazed zellige and Mapei Flexcolor CQ for natural zellige to reduce the...

lang:en score:43 filesize: 264.29 K page_count: 10 document date: 2021-04-15

EASTERN EARTHENWARE

USAGE	Y/N
interior floor & wall	Y
exterior floor & wall	N ^a
residential low traffic	Y
residential high traffic	Y
commercial low traffic	Y
commercial high traffic	N
radiant heating compatible	Y
fingertips varnished	Y
shower	Y
clean shower (residential party)	Y
fountain	Y ¹⁰⁰
freeze flow	N
pool	Y ¹⁰⁰
hacienda/retail	Y
backsplash	Y
grout type	ultracolor plus; Se
joint joint size	butt joint or "Se"
UV resistant	Y



[\[pdf\]](#) Instructions Dimension Guide

EASTERN EARTHENWARE cleanup instructions to avoid the risk of staining grout haze and allow for easy application cleanability Read all installation thoroughly before use Using consistent procedures will produce results Some these Mapei Ultracolor Plus FA include 7 24 20 Trades Eastern Earthenware Resource 072420 f hubspotusercontent40 net hubfs 169240

EASTERN EARTHENWARE USAGE interior floor wall exterior floor wall residential low traffic resid ... ot bead up on the grouted areas then the sealant was not applied properly. cl ONLY recommends Mapei Ultracolor Plus FA grout to reduce the risk of grout haze and staining. Make sure to always follow t...

lang:en score:42 filesize: 193.5 K page_count: 11 document date: 2020-07-24

clé GUILD FUNDAMENTALS



USAGE	Y/N
interior floor & wall	Y
exterior floor & wall	N ^a
residential low traffic	Y
residential high traffic	N
commercial low traffic	N
commercial high traffic	N
radiant heating compatible	Y
fireplace surround	Y
shower	Y
steam shower (sauna & party)	Y
bathtub	Y ^{BN}
break flow	Y
pool	Y ^{BN}
heat resistant	Y
biologically	
grout type	shrinkproof plus 6
grout joint size	1/8"
UV resistant	Y

[\[pdf\]](#) Instructions

clé GUILD FUNDAMENTALS instructions to avoid the risk of staining grout haze and allow for easy application cleanability Read all installation thoroughly before use Using consistent procedures will produce results Some these Mapei Ultracolor Plus FA include 08 04 20 Trades Guild Fundamentals Resource 080420 f hubspotusercontent40 net hubfs 169240 a Downloads

cl GUILD FUNDAMENTALS USAGE interior floor wall exterior floor wall residential
low traffic res ... not bead up on the grout lines then the sealant was not applied
properly. cl ONLY recommends Mapei Ultracolor Plus FA grout for glazed brick
installations. Use of any other grout types can result in ...

lang:en score:42 filesize: 150.09 K page_count: 8 document date: 2020-08-04

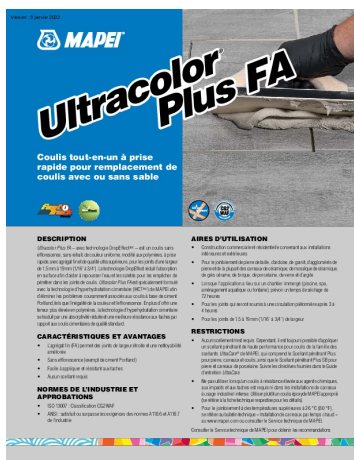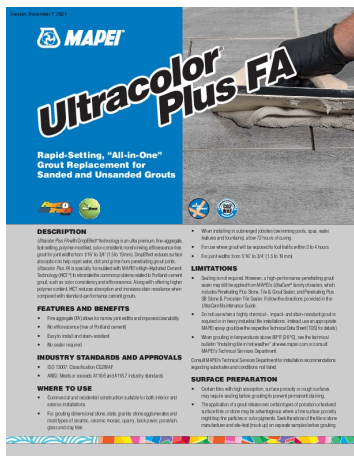[illegible]

[\[pdf\]](#) Instructions Dimension Guide

ZELLIGE f hubspotusercontent40 net Make sure to always follow the manufacturer s instructions Letting grout sit for even a short period of time can be problematic Ultracolor Plus FA must used pool and fountain water line installations 8 * Trades Zellige Resource 111920 hubfs 169240

ZELLIGE USAGE interior floor wall exterior floor wall residential low traffic residential high ... ur tiles and/or grouted * areas then the sealant was not applied properly. cl ONLY recommends Mapei Ultracolor Plus FA grout for glazed zellige and Mapei Flexcolor CQ for natural zellige to reduce the...

lang:en score:40 filesize: 275.37 K page count: 11 document date: 2020-11-19

[\[pdf\]](#) Installation Guide

TDS Ultracolor Plus FA en 2021 cyberbox bi medias s3 amazonaws mapei 2023 Documents |||
Version: December 7, 2021 UltracoPlolurs FA Rapid-Setting, All-in-One Grout
Replacement for Sanded and Unsanded Grouts DESCRIPTION Ultracolor Plus FA
with DropEffect™ technology is an ultra premium, fine-aggregate, fast-setting,
polymer-modified, color-consistent, nonshrinking, efflorescence-fre...
lang:en score:39 filesize: 1010.07 K page count: 6 document date: 2021-12-07

[\[pdf\]](#)

TDS Ultracolor Plus FA fr 2021 cyberbox bi medias s3 amazonaws mapei 2023 Documents |||
Version : 3 janvier 2022 UltracoPlolurs FA Coulis tout-en-un prise rapide pour
remplacement de coulis avec ou sans sable DESCRIPTION Ultracolor Plus FA avec
technologie DropEffect MC est un coulis sans efflorescence, sans retrait, de couleur
uniforme, modifi aux polymres, prise rapide, avec agr...
lang:fr score:39 filesize: 983.23 K page count: 6 document date: 2022-01-03

[\[pdf\]](#) Instructions Datasheet Safety Datasheet Label

ULTRACOLOR PLUS FA SDS EN mapei 80 public US products
Safety Data Sheet **ULTRACOLOR PLUS FA** Safety Data Sheet dated: 2/9/2016 -
version 1 Date of first edition: 2/9/2016 1. IDENTIFICATION Product identifier Mixture
identification: Trade name: **ULTRACOLOR PLUS FA** Recommended use of the
chemical and restrictions on use Recommended use: Ready-mixed cement g...
lang:en score:38 filesize: 219.2 K page count: 7 document date: 2016-02-09

[illegible]

REFERENCE PHOTO

TILE & STONE INSTALLATION SYSTEMS Gauged porcelain tile panels/slabs – Floors

For further information visit www.mapei.com

For further information visit www.mapei.com

Defining gapped porcelain tile panels/slabs

Gapped porcelain tile panels/slabs are gapped porcelain tiles or panels made of porcelain tiles. This construction is made of gapped porcelain tiles or panels, which are laid on a prepared substrate, forming a mosaic floor.

Typically, gapped porcelain tile panels/slabs are made with a thickness from 10 to 20 mm and are manufactured according to the following procedure:

1. Installation of a gapped porcelain tile substrate on a flat and waterproofing prepared surface. Mosaic tiles and panels are transported to the substrate by means of a special trolley, which is used to transport the tiles and panels to the substrate.

2. The tiles and panels are placed on the substrate and are laid out in a grid pattern. The tiles and panels are laid out in a grid pattern, which is defined by the grid lines. The tiles and panels are laid out in a grid pattern, which is defined by the grid lines.

3. The tiles and panels are laid out in a grid pattern, which is defined by the grid lines. The tiles and panels are laid out in a grid pattern, which is defined by the grid lines.

For further information visit www.mapei.com

For further information visit www.mapei.com

Surface preparation

Before the tiles are laid, the substrate must be prepared. The substrate must be clean, dry, and free of any contaminants. The substrate must be prepared by the following procedure:

1. The substrate must be prepared by the following procedure:

2. The tiles and panels are laid out in a grid pattern, which is defined by the grid lines. The tiles and panels are laid out in a grid pattern, which is defined by the grid lines.

3. The tiles and panels are laid out in a grid pattern, which is defined by the grid lines. The tiles and panels are laid out in a grid pattern, which is defined by the grid lines.

4. The tiles and panels are laid out in a grid pattern, which is defined by the grid lines. The tiles and panels are laid out in a grid pattern, which is defined by the grid lines.

5. The tiles and panels are laid out in a grid pattern, which is defined by the grid lines. The tiles and panels are laid out in a grid pattern, which is defined by the grid lines.

6. The tiles and panels are laid out in a grid pattern, which is defined by the grid lines. The tiles and panels are laid out in a grid pattern, which is defined by the grid lines.

7. The tiles and panels are laid out in a grid pattern, which is defined by the grid lines. The tiles and panels are laid out in a grid pattern, which is defined by the grid lines.

8. The tiles and panels are laid out in a grid pattern, which is defined by the grid lines. The tiles and panels are laid out in a grid pattern, which is defined by the grid lines.

9. The tiles and panels are laid out in a grid pattern, which is defined by the grid lines. The tiles and panels are laid out in a grid pattern, which is defined by the grid lines.

10. The tiles and panels are laid out in a grid pattern, which is defined by the grid lines. The tiles and panels are laid out in a grid pattern, which is defined by the grid lines.

10/10

	
Safety Data Sheet for MAPEI® Products Safety Data Sheet (SDS) for MAPEI® version 1 Date of first edition: 06/11/2019	
1. Identification Product identifier Mortar specification Trade name: ULTRACOLOR PLUS F16 Other names of identification Trade name: MARMORINO Recommended use and restrictions on use Recommended use: Architectural and Restorations in wet areas Supplier's details MAPEI S.p.A. 00198 Rome, Italy 00155 Rome, Italy 00155 Rome, Italy - UK Emergency phone number Emergency Number (MAPEI/CHEMICALS) CHEMICALS 0800 404 0006 / 0700 571 3887 Emergency Transport (MAPEI/CHEMICALS) 011 613 900 6666	
2. Hazard identification  Classification of the product GHS 02 H 228 H 252 H 253 H 260 H 302 H 314 H 335 H 410 H 411 H 412 H 413 H 414 H 415 H 416 H 417 H 418 H 419 H 420 H 421 H 422 H 423 H 424 H 425 H 426 H 427 H 428 H 429 H 430 H 431 H 432 H 433 H 434 H 435 H 436 H 437 H 438 H 439 H 440 H 441 H 442 H 443 H 444 H 445 H 446 H 447 H 448 H 449 H 450 H 451 H 452 H 453 H 454 H 455 H 456 H 457 H 458 H 459 H 460 H 461 H 462 H 463 H 464 H 465 H 466 H 467 H 468 H 469 H 470 H 471 H 472 H 473 H 474 H 475 H 476 H 477 H 478 H 479 H 480 H 481 H 482 H 483 H 484 H 485 H 486 H 487 H 488 H 489 H 490 H 491 H 492 H 493 H 494 H 495 H 496 H 497 H 498 H 499 H 500 H 501 H 502 H 503 H 504 H 505 H 506 H 507 H 508 H 509 H 510 H 511 H 512 H 513 H 514 H 515 H 516 H 517 H 518 H 519 H 520 H 521 H 522 H 523 H 524 H 525 H 526 H 527 H 528 H 529 H 530 H 531 H 532 H 533 H 534 H 535 H 536 H 537 H 538 H 539 H 540 H 541 H 542 H 543 H 544 H 545 H 546 H 547 H 548 H 549 H 550 H 551 H 552 H 553 H 554 H 555 H 556 H 557 H 558 H 559 H 560 H 561 H 562 H 563 H 564 H 565 H 566 H 567 H 568 H 569 H 570 H 571 H 572 H 573 H 574 H 575 H 576 H 577 H 578 H 579 H 580 H 581 H 582 H 583 H 584 H 585 H 586 H 587 H 588 H 589 H 590 H 591 H 592 H 593 H 594 H 595 H 596 H 597 H 598 H 599 H 600 H 601 H 602 H 603 H 604 H 605 H 606 H 607 H 608 H 609 H 610 H 611 H 612 H 613 H 614 H 615 H 616 H 617 H 618 H 619 H 620 H 621 H 622 H 623 H 624 H 625 H 626 H 627 H 628 H 629 H 630 H 631 H 632 H 633 H 634 H 635 H 636 H 637 H 638 H 639 H 640 H 641 H 642 H 643 H 644 H 645 H 646 H 647 H 648 H 649 H 650 H 651 H 652 H 653 H 654 H 655 H 656 H 657 H 658 H 659 H 660 H 661 H 662 H 663 H 664 H 665 H 666 H 667 H 668 H 669 H 670 H 671 H 672 H 673 H 674 H 675 H 676 H 677 H 678 H 679 H 680 H 681 H 682 H 683 H 684 H 685 H 686 H 687 H 688 H 689 H 690 H 691 H 692 H 693 H 694 H 695 H 696 H 697 H 698 H 699 H 700 H 701 H 702 H 703 H 704 H 705 H 706 H 707 H 708 H 709 H 710 H 711 H 712 H 713 H 714 H 715 H 716 H 717 H 718 H 719 H 720 H 721 H 722 H 723 H 724 H 725 H 726 H 727 H 728 H 729 H 730 H 731 H 732 H 733 H 734 H 735 H 736 H 737 H 738 H 739 H 740 H 741 H 742 H 743 H 744 H 745 H 746 H 747 H 748 H 749 H 750 H 751 H 752 H 753 H 754 H 755 H 756 H 757 H 758 H 759 H 760 H 761 H 762 H 763 H 764 H 765 H 766 H 767 H 768 H 769 H 770 H 771 H 772 H 773 H 774 H 775 H 776 H 777 H 778 H 779 H 780 H 781 H 782 H 783 H 784 H 785 H 786 H 787 H 788 H 789 H 790 H 791 H 792 H 793 H 794 H 795 H 796 H 797 H 798 H 799 H 800 H 801 H 802 H	

[\[pdf\]](#) Safety Datasheet

ultracolor plus fa sds fr cyberbox bi medias s3 amazonaws mapei |||

Fiche de Données de Sécurité **ULTRACOLOR PLUS FA** Fiche du: 06/10/2021 - révision 8

Date de la première édition: 09/08/2016 1. Identification Identificateur de produit

Identification du mélange : Dénomination commerciale : **ULTRACOLOR PLUS FA**

Autres moyens d'identification Code commercial : 906BU0000 Usage rec...

lang:fr score:37 filesize: 177.56 K page count: 9 document date: 2021-06-29

[\[pdf\]](#) Reference Guide Guide

Reference Guide Gauged porcelain tile panels slabs Floors EN mapei 80 public US linedocument

REFERENCE GUIDE TILE STONE INSTALLATION SYSTEMS Gauged porcelain tile

panels/slabs Floors For interior floor tiles 5 to 6.5 mm 6.5 mm in thickness For the

purpose of this reference guide, all testing data and recommendations are for interior

floors only using gauged porcelain tile panels/slab...

lang:en score:37 filesize: 223.42 K page count: 4 document date: 2018-04-24

[\[pdf\]](#) Instructions Datasheet Safety Datasheet Label

SDS Ultracolor Plus FA en 2021 cyberbox bi medias s3 amazonaws mapei 2023 Documents ||


Safety Data Sheet **ULTRACOLOR PLUS FA** Safety Data Sheet dated: 06/11/2021 -

version 1 Date of first edition: 06/11/2021 1. Identification Product identifier Mixture

identification: Trade name: **ULTRACOLOR PLUS FA** Other means of identification

Trade code: 906BU9990 Recommended use and restrictions on u...

lang:en score:36 filesize: 172.47 K page count: 8 document date: 2022-11-10

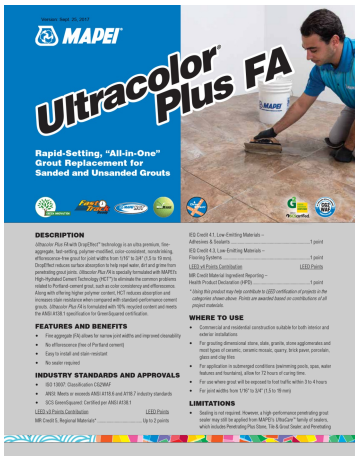

[pdf] Installation Guide Specifications Borchure Catalog

Ultracolor Plus FA 35 Navajo Brown 10 lb Grout Product Brochure Mapei 6BU003505 093994035059

0093994035059 1003913279 48908faf 7807 446b a9ea 7722360d4987 images thdstatic catalog Images

48 |||

Version: Sept. 25, 2017 UltracoPlolurs FA Rapid-Setting, All-in-One Grout Replacement for Sanded and Unsanded Grouts DESCRIPTION Ultracolor Plus FA with DropEffect™ technology is an ultra premium, fineaggregate, fast-setting, polymer-modified, color-consistent, nonshrinking, efflorescence-free g... lang:en score:36 filesize: 727.32 K page_count: 6 document date: 2017-09-25

[pdf] Installation Guide Guide Warranty

MAPEI 5UB507904 Warranty Guide Kerapoxy CQ Cocoa 5079 Epoxy Grout 1 Gallon 093994479525

66412549 lowes productdocuments 2c766037 939e 4f28 963d 576a4d8c7d09 |||

Best-BackedSM Warranty Program MAPEI complements the industry s best products with simple, easy-tounderstand requirements for a variety of warranty options. To be eligible, at least one product from each group must be used and the online warranty registration completed within 90 days of purchase. R...

lang:en score:36 filesize: 692.82 K page_count: 2 document date: 2024-03-05




[pdf]

Voir la fiche technique du produitCoulis Ultracolor Plus FA Mapei Lancôtôt Couvre Sol DesignMapei

Couliscdn shopify s files 1 0579 3021 9683 Coulis v 1717522143 |||

Version: 2 juillet 2019 UltracoPlolurs FA Coulis tout-en-un prise rapide pour remplacement de coulis avec ou sans sable DESCRIPTION Ultracolor Plus FA avec technologie DropEffect MC est un coulis sans efflorescence, sans retrait, de couleur uniforme, modifi aux polymres, prise rapide, avec agrg...

lang:fr score:36 filesize: 1.01 M page_count: 6 document date: 2019-06-28

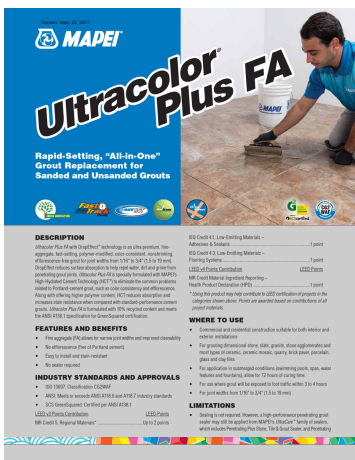

[pdf] Installation Guide Specifications

Ultracolor Plus FA en flooranddecor a bigcontent io v1 static |||

Version: Sept. 25, 2017 UltracoPlolurs FA Rapid-Setting, All-in-One Grout Replacement for Sanded and Unsanded Grouts DESCRIPTION Ultracolor Plus FA with DropEffect™ technology is an ultra premium, fineaggregate, fast-setting, polymer-modified, color-consistent, nonshrinking, efflorescence-free g... lang:en score:35 filesize: 871.35 K page_count: 6 document date: 2019-03-11

How to install Zellige tiles

ZELLIGE HOME

This guide outlines the steps needed for a successful Zellige tile installation. Everyone involved should review it thoroughly before any work begins.

Each Zellige tile is a product of our Moroccan workshops, established in 1913. By Master-tile-makers, artisans who train for decades to perfect the centuries-old process. Each piece carries the subtle irregularities and rich textures that only come from human hands. Major installation is essential—not only for durability, but to bring out the full depth and character of the tile.

While this guide is intended to be accessible, Zellige tile demands a level of care and craftsmanship best provided by a professional. We strongly recommend hiring an installer with specific experience working with Zellige.

Zellige Home is not responsible for the maintenance or installation of tile after delivery. We do not accept liability for damages incurred during or after installation, dissatisfaction related to natural variations in color, texture, or finish, or any issues arising from improper handling, storage, or maintenance.

We recommend ordering 10-15% more tile than your project's exact measurements to account for cuts and adjustments. For greater flexibility in layout and tile selection—especially if doing particular about color, thickness, or texture—we suggest a coverage of 20-25% is suggested. Zellige tile features natural variation, including subtle differences in color and thickness, irregular edges, surface coating, and occasional pits or chips that may expose the clay body beneath the glaze. These are inherent to a handmade product and not defects. Samples are a general representation and may not exactly match your full order. Likewise, batches placed after the initial purchase may vary slightly due to differences between production batches.

Required Materials

- Mapei Keraflex or similar high-quality flexible cement-based adhesive
- Notched trowel
- Rubber level
- Rubber grout float
- Mapei Ultracolor Plus FA grout (the glazed Zellige)
- For floor: Terracotta Mapei Flexcolor CG grout and 511 Porema Plus sealer
- Sponge and clean water
- Water-cured exterior tile sealer (not used)
- Tile spacers (optional)

IMPORTANT! Safety First

Zellige tiles have sharp, handcrafted edges. Always wear protective gloves and safety goggles when handling or cutting tiles. Use a wet saw with a diamond blade for smooth, clean cuts and reduced dust. Always work in a well-ventilated area when applying adhesives or sealers, and keep the area dry and free of boards.

How to Install Zellige Tiles: A Comprehensive Guide by Zellige Home

Learn the essential steps for a successful Zellige tile installation with this comprehensive guide from Zellige Home. Covers materials, preparation, installation techniques, and maintenance for authentic Moroccan tiles.

lang:en score:34 filesize: 255.67 K page_count: 2 document date: 2025-05-12

Grout Troubleshooting Guide





[pdf] Troubleshooting Guide Reference Guide Documentation Guide

grout troubleshooting guide cdnmedia mapei docs librariesprovider10 line technical documentation

documents sfvrnsn 376da9bf 0 |||

Grout Troubleshooting Guide TABLE OF CONTENTS Cement Grout Symptom 1-2Grout discoloration 3 Efflorescence 4 Tile discoloration 5 Grout cracking 6 Grout with pinholes 6 Powdery grout in the joints Ready-to-Use RTU Grout Symptom 7-8 Grout discoloration 9 Efflorescence 9 Tile disc...

lang:en score:34 filesize: 1.11 M page_count: 24 document date: 2016-10-24



Safety Data Sheet
ULTRACOLOR PLUS FA
Navajo Brown 10 lb Grout 6B/003505 - version 2
Date of first edition: 2/9/2016

1. IDENTIFICATION
Product identifier:
Trade name: ULTRACOLOR PLUS FA
Recommended use of the chemical and restrictions on use:
Recommended use: Ready-mixed cement grout
Restrictions on use: N/A
Name, address, and telephone number of the chemical manufacturer, importer, or other responsible party:
Company: MAPEI CORP. 1248 East Nevada Center Circle
30462, Chandler, Arizona, AZ, USA
(Phoenix, AZ) 480-988-0000
Emergency 24 hour assistance:
(USA) CHEMTEC 1-800-424-9300
(CANADA) CHEMTEC 1-877-345-9300

2. HAZARD(S) IDENTIFICATION
Classification of the chemical:
GHS 05: Corrosive
GHS 09: Environment
GHS 07: Hazardous to the aquatic environment
GHS 08: Harmful to the aquatic environment
GHS 06: Harmful to the environment
GHS 05: Corrosive
GHS 09: Environment
GHS 07: Hazardous to the aquatic environment
GHS 08: Harmful to the aquatic environment
GHS 06: Harmful to the environment

3. COMPOSITION/INFORMATION ON INGREDIENTS
Substances:
N/A

4. FIRST AID
Inhalation:
Move to fresh air. If breathing is difficult, give oxygen.
Ingestion:
Do not induce vomiting. Give water to drink.
Skin contact:
Wash with plenty of water for at least 15 minutes.
Eye contact:
Wash with plenty of water for at least 15 minutes.
Other:
None

5. FIRE FIGHTING
Flammable:
No
Oxidizing:
No
Highly flammable:
No
Highly oxidizing:
No
Highly reactive:
No
Corrosive:
No
Other:
None

6. ACCIDENTAL RELEASE
Spillage:
Clean up immediately. Do not allow to dry.
Other:
None

7. DISPOSAL
Disposal:
Dispose of in accordance with applicable regulations.
Other:
None

8. TRANSPORT
Hazardous:
No
Other:
None

9. INFORMATION ON THE SUPPLIER
Name:
Address:
Telephone:
Fax:
E-mail:
Website:
Other:
None

10. OTHER INFORMATION
Other:
None

11. ADDITIONAL INFORMATION
Other:
None

12. OTHER INFORMATION
Other:
None

13. OTHER INFORMATION
Other:
None

14. OTHER INFORMATION
Other:
None

15. OTHER INFORMATION
Other:
None

16. OTHER INFORMATION
Other:
None

17. OTHER INFORMATION
Other:
None

18. OTHER INFORMATION
Other:
None

19. OTHER INFORMATION
Other:
None

20. OTHER INFORMATION
Other:
None

21. OTHER INFORMATION
Other:
None

22. OTHER INFORMATION
Other:
None

23. OTHER INFORMATION
Other:
None

24. OTHER INFORMATION
Other:
None

25. OTHER INFORMATION
Other:
None

26. OTHER INFORMATION
Other:
None

27. OTHER INFORMATION
Other:
None

28. OTHER INFORMATION
Other:
None

29. OTHER INFORMATION
Other:
None

30. OTHER INFORMATION
Other:
None

31. OTHER INFORMATION
Other:
None

32. OTHER INFORMATION
Other:
None

33. OTHER INFORMATION
Other:
None

34. OTHER INFORMATION
Other:
None

35. OTHER INFORMATION
Other:
None

36. OTHER INFORMATION
Other:
None

37. OTHER INFORMATION
Other:
None

38. OTHER INFORMATION
Other:
None

39. OTHER INFORMATION
Other:
None

40. OTHER INFORMATION
Other:
None

41. OTHER INFORMATION
Other:
None

42. OTHER INFORMATION
Other:
None

43. OTHER INFORMATION
Other:
None

44. OTHER INFORMATION
Other:
None

45. OTHER INFORMATION
Other:
None

46. OTHER INFORMATION
Other:
None

47. OTHER INFORMATION
Other:
None

48. OTHER INFORMATION
Other:
None

49. OTHER INFORMATION
Other:
None

50. OTHER INFORMATION
Other:
None

51. OTHER INFORMATION
Other:
None

52. OTHER INFORMATION
Other:
None

53. OTHER INFORMATION
Other:
None

54. OTHER INFORMATION
Other:
None

55. OTHER INFORMATION
Other:
None

56. OTHER INFORMATION
Other:
None

57. OTHER INFORMATION
Other:
None

58. OTHER INFORMATION
Other:
None

59. OTHER INFORMATION
Other:
None

60. OTHER INFORMATION
Other:
None

61. OTHER INFORMATION
Other:
None

62. OTHER INFORMATION
Other:
None

63. OTHER INFORMATION
Other:
None

64. OTHER INFORMATION
Other:
None

65. OTHER INFORMATION
Other:
None

66. OTHER INFORMATION
Other:
None

67. OTHER INFORMATION
Other:
None

68. OTHER INFORMATION
Other:
None

69. OTHER INFORMATION
Other:
None

70. OTHER INFORMATION
Other:
None

71. OTHER INFORMATION
Other:
None

72. OTHER INFORMATION
Other:
None

73. OTHER INFORMATION
Other:
None

74. OTHER INFORMATION
Other:
None

75. OTHER INFORMATION
Other:
None

76. OTHER INFORMATION
Other:
None

77. OTHER INFORMATION
Other:
None

78. OTHER INFORMATION
Other:
None

79. OTHER INFORMATION
Other:
None

80. OTHER INFORMATION
Other:
None

81. OTHER INFORMATION
Other:
None

82. OTHER INFORMATION
Other:
None

83. OTHER INFORMATION
Other:
None

84. OTHER INFORMATION
Other:
None

85. OTHER INFORMATION
Other:
None

86. OTHER INFORMATION
Other:
None

87. OTHER INFORMATION
Other:
None

88. OTHER INFORMATION
Other:
None

89. OTHER INFORMATION
Other:
None

90. OTHER INFORMATION
Other:
None

91. OTHER INFORMATION
Other:
None

92. OTHER INFORMATION
Other:
None

93. OTHER INFORMATION
Other:
None

94. OTHER INFORMATION
Other:
None

95. OTHER INFORMATION
Other:
None

96. OTHER INFORMATION
Other:
None

97. OTHER INFORMATION
Other:
None

98. OTHER INFORMATION
Other:
None

99. OTHER INFORMATION
Other:
None

100. OTHER INFORMATION
Other:
None

[pdf] Instructions Datasheet Safety Datasheet Catalog Label

Ultracolor Plus FA 35 Navajo Brown 10 lb Grout SDS Mapei 6BU003505 093994035059 0093994035059

1003913279 f3544451 2006 4b18 b54f 1453fbccde6c images thdstatic catalog Images f3 |||

Safety Data Sheet **ULTRACOLOR PLUS FA** Safety Data Sheet dated: 4/25/2016 - version 2 Date of first edition: 2/9/2016 1. IDENTIFICATION Product identifier Mixture identification: Trade name: **ULTRACOLOR PLUS FA** Recommended use of the chemical and restrictions on use Recommended use: Ready-mixed cement ...

lang:en score:33 filesize: 220.75 K page_count: 8 document date: 2016-04-25



[\[pdf\]](#)

SpécificationCoulis Ultracolor plus fa Céramique I EntrepôtUltracolor FR ca Fiche techniquecdn shopify s
files 1 0574 4128 8280 technique v 1725640391 |||

Ultracolor Plus FA Coulis tout-en-un prise rapide pour remplacement de coulis avec ou sans sable DESCRIPTION Ultracolor Plus FA avec la technologie DropEffectMC et une compensation totale des missions de CO2 au cours du cycle de vie est un coulis sans efflorescence, sans retrait, de couleur unif...

lang:fr score:33 filesize: 5.67 M page_count: 10 document date: 0000-00-00

[\[pdf\]](#) Reference Guide Guide

Tom Carroll Merkrete Cross Reference Guide 1 MAPEI CUSTOM TEC Merkrete® 700 Premium Set 317
Unmodified Keraflor Pro Epoxy Mortar Grout Prism® Color Consistent cdn hibuwebsites
6322972464b842ff9f52d7a7e8e49f5 files uploaded |||

Product Reference Crossover Guide PRODUCT DESCRIPTION MERKRETE
LATICRETE MAPEI CUSTOM TEC Mor ... 500 Sanded 1600 Unsanded
PERMACOLOR PERMACOLOR Select* Keracolor™ S Keracolor™ U Ultracolor
Plus Ultracolor Plus FA Polyblend Sanded Polyblend Unsanded Prism Color
Consistent Grout PLASMATM Spect...

lang:en score:32 filesize: 115.68 K page count: 1 document date: 2021-02-16

[\[pdf\]](#)

Ultracolor Plus FA 2023 11 14 — with DropEffect technology and CO emissions fully offset in the product
s life cycle is an ultra premium ne aggregate fast setting 65735776 lowes productdocuments 0eb0414b
a76e 4e4a 8b00 4503f95478fa |||

Ultracolor Plus FA Rapid-Setting, All-in-One Grout Replacement for Sanded and Unsanded Grouts DESCRIPTION Ultracolor Plus FA with DropEffect™ technology and CO2 emissions fully offset in the product's life cycle is an ultra premium, fine-aggregate, fast-setting, polymer-modified, color-consist...

lang:en score:32 filesize: 5.65 M page count: 10 document date: 0000-00-00



[pdf] Installation Guide Guide Catalog

Keracolor 10 lb Bone Unsanded Grout Installation Guide Mapei 5UH501505 093994815101

0093994815101 302615 2ecf104a a128 4158 9624 4b14d026eaca images thdstatic catalog Images 2e |||

Unsanded Grout Versin: Sep. 28, 2017 Keracolor U Lechada sin arena de calidad superior y con polmero TM DESCRIPCIN Keracolor U Unsanded Grout es una lechada de calidad superior, premezclada, de cemento Portland sin arena, modificada con polmeros para losetas, que solamente requiere de agregar agua... lang:es score:32 filesize: 904.59 K page_count: 6 document date: 2017-09-28



[pdf] Instructions

Microsoft Word Zellige Installation Instructions ENGLISH docx Tile Application and InstallationZELLIGE

TILE INSTALLATIONZellige 2020 04 10cdn shopify s files 1 0864 9418 3738 10 v 1727462081 |||

ZELLIGE TILE APPLICATION AND INSTALLATION About Zellige Zellige is a traditional Moroccan tile handc ... ther snap with a tile cutter or slice with a wet diamond blade Grout Grout glazed tiles with Mapei Ultracolor Plus FA and Unglazed Natural tiles with Mapei Flexcolor CQ - Grout will also fill pits, c...

lang:en score:32 filesize: 129.13 K page_count: 2 document date: 2020-04-09



[pdf] Instructions

Microsoft Word Zellige Installation Instructions Spanish docx Aplicación e Instalación de Azulejos

ZelligeZELLIGE TILE INSTALLATIONZellige 2020 04 10cdn shopify s files 1 0864 9418 3738 10 v 1727462092 |||

APLICACIN E INSTALACIN DE LOS AZULEJOS ZELLIGE Acerca de Zellige Zellige es un azulejo tradiciona ... de azulejos o con una cuchilla de diamante hmeda Lechada: Enleche los azulejos esmaltados con Mapei Ultracolor Plus FA y los azulejos naturales no esmaltados con Mapei Flexcolor CQ - La lechada tambín... lang:es score:31 filesize: 128.47 K page_count: 2 document date: 2020-04-10



[pdf] User Manual

MAPEI 2855905 Installation Manual Radiant Mapeheat 54 sq ft 093994012012 61113526 lowes


productdocuments 4b3c2c36 184c 45cd bc85 3149199be99d |||

Version: May 11, 2022 Mapeheat TM Membrane Lightweight Uncoupling, CrackIsolation and Waterproofing Membrane for Electrical Floor Heating DESCRIPTION Mapeheat Membrane is a lightweight uncoupling, crack-isolation and waterproofing membrane that also provides vapor management and load support. Thi...

lang:en score:30 filesize: 922.52 K page_count: 6 document date: 2022-05-11

ZIO & SONS + clé

USAGE	Y/N
interior floor & wall	Y
exterior floor & wall	N ^a
residential low traffic	Y
residential high traffic	Y
commercial low traffic	Y
commercial high traffic	N
radiant heating compatible	Y
fireplace surround	Y
showers	Y
clean show/wheel (passing partly)	Y
footfall	Y ^{non}
freeze flow	N
pool	Y ^{non}
heat resistant	N ^{non}
backlighting	Y
grout type	extruded plus 2 & flexcolor or 7
grout joint size	best joint or 7/16"
UV resistant	Y



Standard thicknesses for tiles are 1/4" and 3/8" for border pieces. Note that border pieces come pre-assembled and can appear to be thicker than 1/4" due to the white setting material underneath that is used to glue the individual tiles pieces together.

Please note all dimensions can vary plus or minus 1/2".

16 Can only be installed on exterior walls and requires vertical, wind or fading in the top and application of water-proof penetrating sealer. In non freeze/thaw locations.

17 Water base only in non freeze/thaw locations. We only recommend grout seals with water-proof penetrating sealer.

18A Depending how "sloping" your tile is a piece can be a wall or hydrophilic there must be at least a 2" slope between the tile and open.

clé GUILD NEW CALIFORNIA

USAGE	Y/N
interior floor & wall	Y
exterior floor & wall	N ^a
residential low traffic	Y
residential high traffic	N
commercial low traffic	N
commercial high traffic	N
radiant heating compatible	Y
fireplace surround	Y
shower	Y
steam shower (sauna/jacuzzi)	Y
fountain	Y ^{non}
freeze thaw	Y
pool	Y ^{non}
heat resistant	Y
biological	Y
green tops	structural plus 5%
grout joint size	3/8"
UV resistant	Y

- Standard thickness for New California is 1/2". Resin core thickness can vary plus or minus 10%.
- Can only be installed on exterior walls and requires vertical weather flashing at the top and application of waterproof penetrating sealant.
- Water loss policy: www.thru.com for a form, with application of waterproofing sealant to sealant.

[\[pdf\]](#) Installation Guide Instructions Dimension Guide

ZIO SONS clé completed and maintained correctly see manufacturer 39 s instructions then you can proceed WITH CAUTION If comply with all of the above understand that without sealant your install won t hold up—then it up to installing this tile in a freeze thaw location 08 04 20 Homeowners zio sons

Resource 080420 f hubspotusercontent40 net hubfs 169240 Downloads

ZIO SONS cl USAGE interior floor wall exterior floor wall residential low traffic
residenti ... ealant tech support on the waterproofing of the tiles. GROUT
GUIDELINES cl ONLY recommends Mapei Ultracolor Plus FA grout for glazed zellige
and Mapei Flexcolor CQ for natural zellige. Ultracolor P...

lang:en score:30 filesize: 127.08 K page_count: 6 document date: 2020-08-04

[\[pdf\]](#) Instructions

Standard thickness for New California is 1/2 PLEASE FOLLOW ALL MIRACLE SEALANT INSTRUCTIONS FOR BEST RESULTS as well MAINTENANCE UPKEEP RECOMMENDATIONS * HINT if water or oil does not bead up on the grout lines then sealant was applied properly 06 23 20 Homeowner s clé guild Resource 062320 f hubspotusercontent40 net hubfs 169240

cl GUILD NEW CALIFORNIA USAGE Y/N interior floor wall Y exterior floor wall N*
residential ... herringbone pattern. GROUT GUIDELINES MAINTENANCE SEALING
GUIDELINES cl ONLY recommends Mapei Ultracolor Plus FA grout for glazed brick
installations. Use of any other grout types can result in ...

lang:en score:30 filesize: 101.59 K page count: 4 document date: 2020-06-23

[illegible]

[\[pdf\]](#) User Manual Installation Guide

MAPEI 2850430 HowTo Manual Radiant Mapeheat 323 sq ft 093994103956 61177905 lowes
productdocuments 1ed5adc2 6e16 47f8 9f10 e29e20989f99 |||

Version: November 9, 2022 MapeguaUrMd Underlayment Membrane for Ceramic Tile and Stone DESCRIPTION Mapeguard UM is a premium-performance, lightweight, waterproofing and vaporpressure-equalizing underlayment membrane that provides crack suppression for use under ceramic tile and stone installations...

lang:en score:29 filesize: 886.66 K page count: 6 document date: 2022-11-09

