

Hyper Tough

Hyper Tough 50-Foot Extension Cord User Manual

Model: 23240

1. INTRODUCTION

This manual provides essential information for the safe and effective use of your Hyper Tough 50-Foot Outdoor/Indoor Extension Cord. Please read this manual thoroughly before use and retain it for future reference.



Figure 1: The Hyper Tough 50-Foot Extension Cord, coiled for storage or transport.

2. SAFETY INFORMATION AND WARNINGS

WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. **WASH HANDS AFTER HANDLING.**

- Always inspect the cord for damage before each use. Do not use if the insulation is cut, frayed, or otherwise damaged.
- Ensure the cord's electrical ratings (13A, 125V, 1625W) are suitable for the appliance or tool being powered. Do not overload the cord.
- This cord is designed for light-duty applications. Avoid using it with heavy-duty equipment that exceeds its specified wattage.
- The cord is water-resistant, but it is not submersible. Avoid prolonged exposure to standing water.
- Always unplug the cord from the power source before disconnecting any appliances.
- Do not remove the ground prong from the plug. This cord is designed for use with grounded outlets only.
- Keep children and pets away from the cord during use.
- Do not run the cord through doorways or windows where it can be pinched.
- Do not cover the cord with rugs, furniture, or other objects, as this can cause overheating.
- This product is ETL Listed, indicating compliance with North American safety standards. It also meets OSHA specifications.



Figure 2: Close-up view of the cord's markings, showing safety certifications and specifications.

3. SETUP

1. **Uncoil the Cord:** Carefully uncoil the desired length of the extension cord. Avoid kinks or tight bends. The included hook and loop strap can be used to manage excess length.
2. **Inspect the Cord:** Before plugging in, visually inspect the entire length of the cord, including the male plug and female receptacle, for any signs of damage.
3. **Placement:** Position the cord in a way that minimizes tripping hazards. The bright orange color is designed to enhance visibility.



Figure 3: The male plug and female receptacle of the extension cord.

4. OPERATING INSTRUCTIONS

- 1. Connect Appliance:** Plug the appliance or tool into the female receptacle end of the extension cord. Ensure a firm connection.
- 2. Connect to Power Source:** Plug the male end of the extension cord into a grounded 125V outlet.
- 3. Power On:** Once both connections are secure, you can power on your appliance or tool.
- 4. Disconnecting:** To disconnect, first turn off the appliance. Then, unplug the extension cord from the wall outlet, followed by unplugging the appliance from the extension cord.

This cord is suitable for both indoor and outdoor use, making it versatile for various applications such as powering domestic tools, outdoor equipment, lights, electric mowers, and holiday decorations.



Figure 4: The extension cord in a typical use environment, coiled on a workbench.

5. MAINTENANCE AND STORAGE

- **Cleaning:** Wipe the cord clean with a dry cloth. Do not use harsh chemicals or immerse the cord in water.
- **Inspection:** Regularly inspect the cord for any signs of wear, cuts, or damage to the insulation or plugs.
- **Storage:** When not in use, coil the cord neatly. The included hook and loop strap facilitates easy and organized storage. Store the cord in a dry place, away from direct sunlight and extreme temperatures.

6. TROUBLESHOOTING

Problem	Possible Cause	Solution
---------	----------------	----------

Problem	Possible Cause	Solution
Appliance not receiving power.	Cord not fully plugged in; tripped circuit breaker; overloaded cord; damaged cord.	Ensure all connections are secure. Check your home's circuit breaker. Reduce load on the cord. Inspect cord for damage; if damaged, discontinue use.
Cord feels warm during use.	Overloaded cord; poor ventilation.	Unplug and allow to cool. Ensure the appliance's wattage does not exceed the cord's rating. Do not cover the cord.
Visible damage to the cord.	Physical wear and tear; accidental damage.	Immediately discontinue use. A damaged cord poses a serious electrical hazard. Replace the cord.

7. SPECIFICATIONS

Length: 50 Feet (15.2 Meters)

Gauge: 16 Gauge (AWG 16/3C SJTW)

Amperage Rating: 13 Amps Max

Voltage Rating: 125 Volts

Wattage Rating: 1625 Watts

Plug Type: 3-Prong Grounded (Type B)

Color: Orange


Features: Water Resistant, Flame Retardant

Certifications: ETL Listed, Meets OSHA specifications

Model Number: 23240

Item Weight: 3.12 pounds

Package Dimensions: 10.24 x 6.89 x 2.52 inches

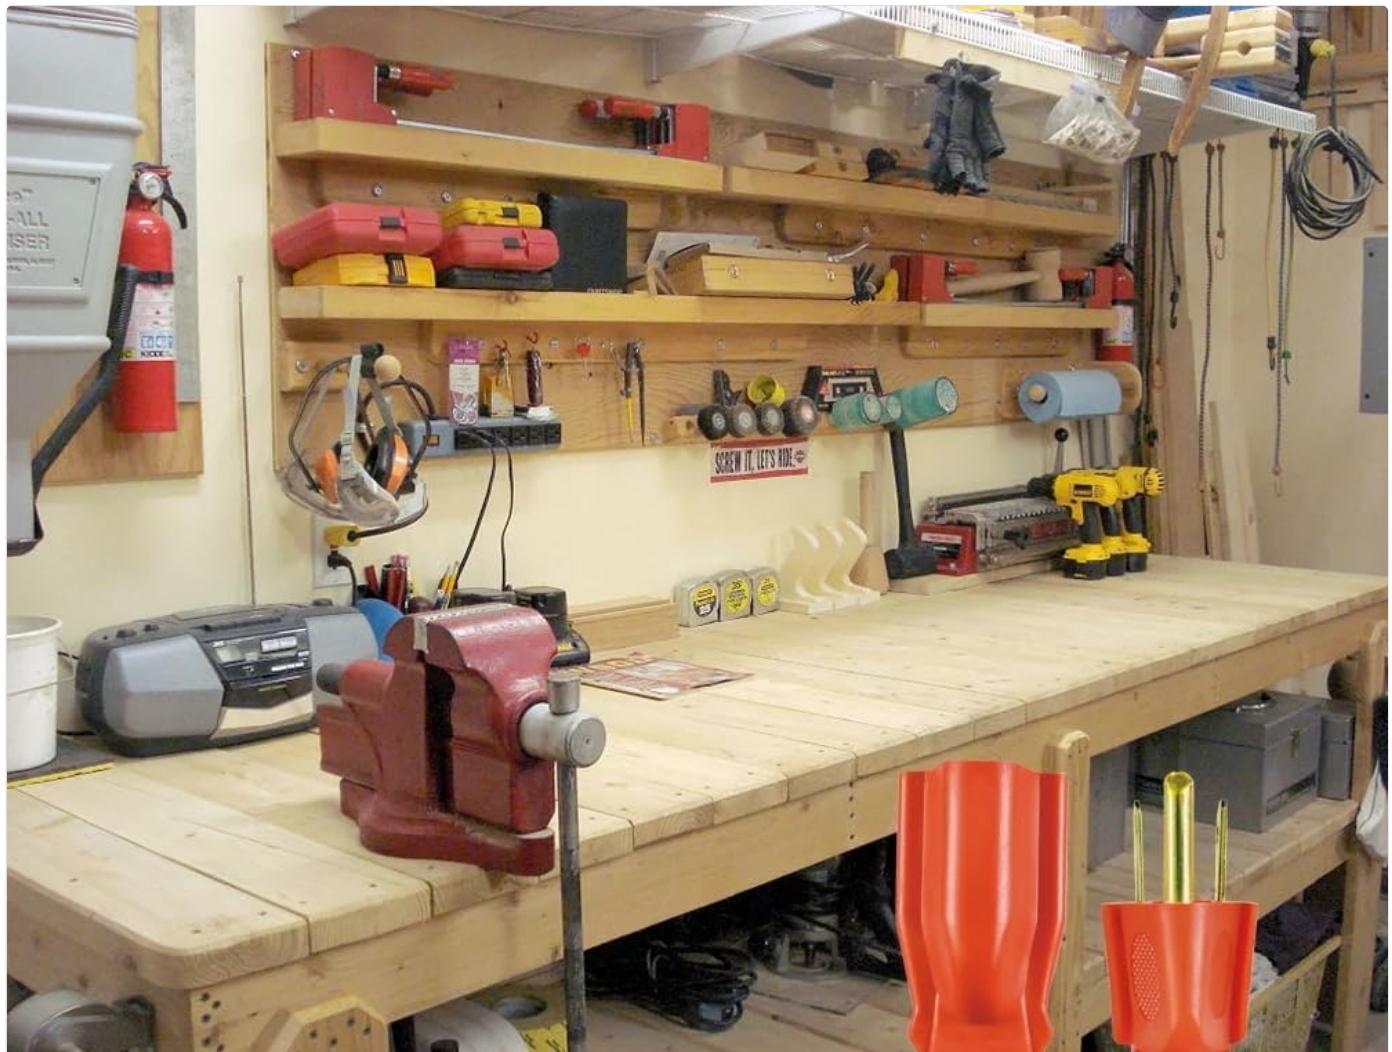

50-foot Extension Cord

1 Grounded Outlet
AWG 16/3C SJTW



Figure 5: Visual representation of the cord highlighting its 50-foot length and AWG 16/3C SJTW rating.

8. WARRANTY INFORMATION

This Hyper Tough extension cord comes with a **2-Year Limited Warranty** provided by the manufacturer. Please retain your proof of purchase for warranty claims. For specific details regarding warranty coverage and procedures, refer to the warranty documentation included with your product or contact Hyper Tough customer support.

9. CUSTOMER SUPPORT

For further assistance, technical support, or to inquire about warranty services, please contact Hyper Tough customer support. Contact information can typically be found on the product packaging or the official Hyper Tough website. Your purchase is backed by Amazon's satisfaction guarantee.

© 2024 Hyper Tough. All rights reserved.

Manual Version: 1.0