

COSMO COS-63ISS75

COSMO COS-63ISS75 30-inch Island Range Hood Instruction Manual

Lumin Collection 380 CFM Ducted Island Range Hood with Soft Touch Controls and LED Lights

1. PRODUCT OVERVIEW

The COSMO COS-63ISS75 is a 30-inch island mount range hood designed to efficiently remove cooking odors and smoke from your kitchen. Featuring a sleek stainless steel design, soft touch controls, and energy-efficient LED lighting, this unit offers both functionality and modern aesthetics.

Key Features:

- **Efficient Airflow:** 380 CFM centrifugal motor effectively removes smells and odors.
- **Superior Filtration:** Dishwasher-safe ARC-FLOW Permanent Filters for easy maintenance.
- **Soft Touch Controls:** Intuitive control panel for fan speed, lights, and power.
- **Energy-Saving LED Lights:** 4 x 2W LED lights provide bright illumination for your cooktop.
- **Versatile Installation:** Convertible for ducted or ductless operation (optional Carbon Filter Kit CFK1-TM sold separately for ductless).



Figure 1: Front view of the COSMO COS-63ISS75 Island Range Hood.

2. SAFETY INFORMATION

Please read all instructions carefully before installation and operation to prevent injury or damage. Retain this manual for future reference.

- Always disconnect power before servicing or cleaning.
- Installation must comply with all local codes and standards.
- Ensure proper grounding to reduce the risk of electric shock.
- Do not operate the range hood without filters in place.
- Never leave cooking unattended.

3. SETUP AND INSTALLATION

The COS-63ISS75 is designed for island mount installation. It can be configured for ducted (venting outside) or ductless (recirculating) operation. A Carbon Filter Kit (CFK1-TM) is required for ductless use and is sold separately.

3.1 Pre-Installation Checklist

- Verify all included components are present: 30 inch Island Range Hood, Permanent Filters, Installation Kit.
- Ensure electrical requirements are met: 120V/60Hz, 3-Prong Plug.
- Confirm adequate ceiling support for the unit's weight (approximately 38.4 lbs).
- For ducted installation, ensure a 6-inch round duct opening is available.

3.2 Dimensions and Clearance

The product dimensions are 29.3" (W) x 23.2" (D) x Adjustable 37.4" - 56.3" (H). Maintain a recommended distance of 24"-36" from the cooktop to the bottom of the range hood.



Figure 2: Detailed dimensions of the range hood for installation planning.

3.3 Installation Steps (Overview)

1. Mount the ceiling bracket securely to the ceiling joists.
2. Connect the ductwork (if ducted) or install the carbon filters (if ductless).
3. Attach the chimney sections to the main unit and secure them.
4. Lift the main hood body and attach it to the ceiling bracket.
5. Connect the electrical wiring to the 3-prong plug.
6. Install the baffle filters.

For detailed step-by-step instructions, refer to the included installation kit manual.



2M+ A Better Home Starts With Homes Improved COSMO

Cosmo Appliances, the new name in modern luxury kitchen appliances is fast becoming a leading brand in manufacturing premium products known for seamlessly integrating performance, technology and design to advance the kitchen beyond mere form and function. Cosmo makes state-of-the-art-living possible with our cost-effective portfolio of aesthetically pleasing and high-performing stainless steel appliances.

FEATURED ON



AFFORDABLE LUXURY

Enjoy modern and contemporary appliances incorporating the latest designs at a revolutionary price.



PREMIUM MANUFACTURING

Created with up-to-date technology and the best components available, bringing you state-of-the-art living.




CULTIVATE YOUR PASSION

Focus more on what you love with appliances that achieve modern culinary techniques and applications.

Figure 3: Top view showing the vent hole diameter and 3-prong plug location.




COS-63ISS75
30 IN. ISLAND MOUNT
RANGE HOOD

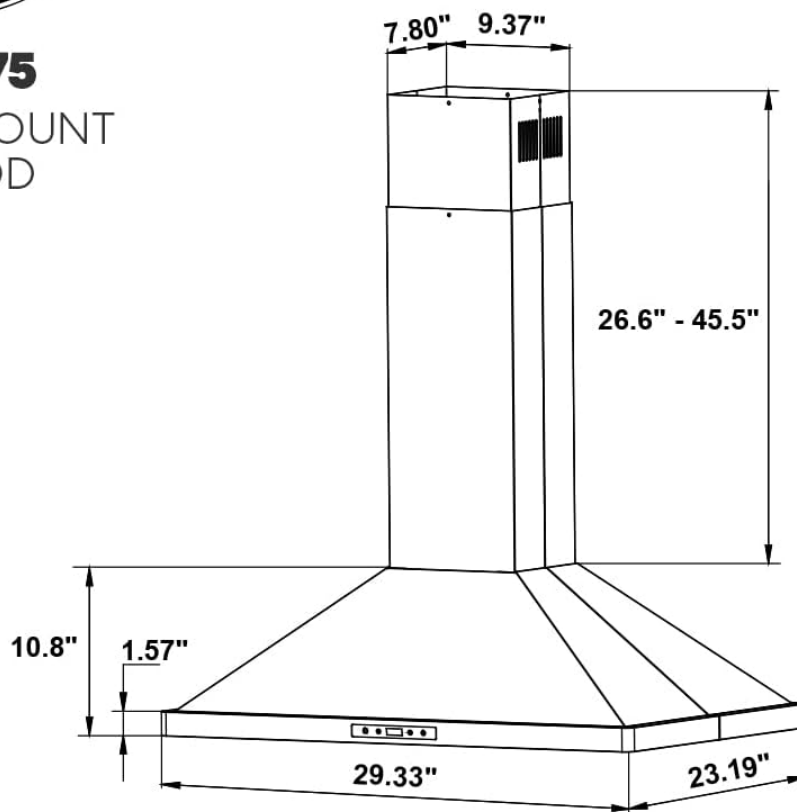

Vent Hole Diameter: 6 in.

Location of
3-Prong Plug

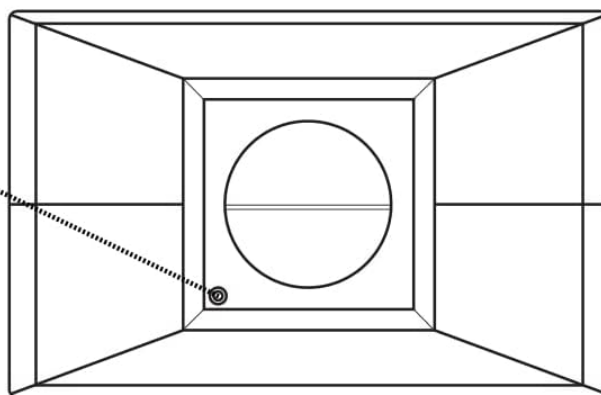

TOP VIEW

Dimensions (WxDxH): 29.3" x 23.2" x 37.4-56.3"

Figure 4: Close-up of the durable ARC-FLOW Permanent Filters.

4. OPERATING INSTRUCTIONS

The COS-63ISS75 features soft touch controls for easy operation of its various functions.

4.1 Control Panel Overview

Easier Operation

Soft Touch Controls

Control the power, fan speed and lights with the touch of a button.



Figure 5: Diagram of the soft touch control panel with button functions.

- **Power Button:** Turns the unit on/off.
- **Fan Speed Buttons (+/-):** Adjusts the fan speed through 3 levels.
- **Light Button:** Turns the LED lights on/off.
- **Timer Button:** Activates the delayed auto-shut off timer.
- **Digital Clock:** Displays the current time.

4.2 Fan Operation

Press the Power button to turn on the fan. Use the '+' and '-' buttons to cycle through the three fan speeds. The fan speed is indicated on the digital display.

4.3 Lighting

Press the Light button to turn the 4 x 2W LED lights on or off. These lights provide bright illumination for your cooking area.

4.4 Timer Function

The timer function allows for delayed shut-off. Consult the full manual for specific programming instructions.

Your browser does not support the video tag.

Video 1: Demonstration of the Cosmo 63ISS75 Island Range Hood with 3-Speed Fan, showcasing its operation and features.

5. MAINTENANCE

Regular maintenance ensures optimal performance and longevity of your range hood.

5.1 Filter Cleaning

The ARC-FLOW Permanent Filters are dishwasher-safe. To clean, simply remove them by pulling the latch and place them in your dishwasher. Allow them to dry completely before re-installing.

5.2 Surface Cleaning

Clean the stainless steel surfaces with a non-abrasive stainless steel cleaner and a soft cloth. For glass surfaces, use a glass cleaner. Avoid abrasive cleaners or scouring pads that can scratch the finish.



Figure 6: Diagram illustrating the removal and cleaning process for the ARC-FLOW Permanent Filters.

6. TROUBLESHOOTING

If you encounter issues with your range hood, refer to the following common troubleshooting tips:

- **Fan not operating:** Check if the unit is plugged in and the circuit breaker is not tripped. Ensure the power button is pressed.
- **Lights not working:** Verify the light button is pressed. Check if the LED bulbs need replacement (consult warranty for service).
- **Poor suction:** Clean the baffle filters. For ducted models, check for obstructions in the ductwork. For ductless models, ensure carbon filters are correctly installed and not saturated.
- **Excessive noise:** Ensure all mounting screws are tight. Check for obstructions in the fan or ductwork.

If problems persist, contact customer support.

7. SPECIFICATIONS



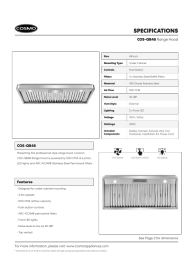
Specification	Value
Model Number	COS-63ISS75
Dimensions (W x D x H)	29.3" x 23.2" x Adjustable 37.4" - 56.3"
Air Flow Capacity	380 Cubic Feet Per Minute (CFM)
Noise Level	As low as 45 Decibels
Material	Stainless Steel
Mounting Type	Island Mount
Controls Type	Soft Touch
Number of Speeds	3
Light Source Type	LED (4 x 2W)
Filter Type	Baffle (Permanent, Dishwasher-Safe)

Specification	Value
Ventilation Type	Ducted/Ductless (with optional kit)
Electrical Requirements	120V/60Hz, 3-Prong Plug
Item Weight	38.4 Pounds

8. WARRANTY AND SUPPORT

The COSMO COS-63ISS75 Island Range Hood comes with a**2-Year Limited Parts Warranty**. Our customer support team is proudly based in the USA and is available to assist with any questions or service needs. For warranty claims or technical assistance, please refer to the contact information provided in your product packaging or visit the official COSMO website.

Related Documents - COS-63ISS75

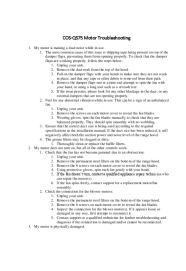	<p>COS-QS75 Range Hood Troubleshooting Guide COSMO</p> <p>Troubleshoot common issues with your COSMO COS-QS75 range hood, including motor noise, power problems, and airflow issues. Find solutions and maintenance tips.</p>
	<p>COSMO Wall Mount Range Hood Installation Guide & User Manual</p> <p>Comprehensive installation guide and user manual for COSMO Wall Mount Range Hoods, covering safety instructions, parts lists, dimension diagrams, installation procedures, maintenance, troubleshooting, and warranty information for various models.</p>
	<p>Cosmo COS-QB48 Range Hood Specifications and Dimensions</p> <p>Detailed specifications and dimensions for the Cosmo COS-QB48 48-inch under-cabinet range hood, featuring 500 CFM airflow, push-button controls, LED lighting, and stainless steel baffle filters.</p>

