



- Manuals.plus /
- › Phiestina /
- › Phiestina WF008-5-BN 8-Inch Widespread Bathroom Faucet Instruction Manual

Phiestina WF008-5-BN



Phiestina WF008-5-BN 8-Inch Widespread Bathroom Faucet Instruction Manual

Model: WF008-5-BN



1. PRODUCT OVERVIEW

The Phiestina WF008-5-BN is an 8-inch widespread bathroom faucet designed for 3-hole deck mount installations. It features two handles for precise control of water temperature and flow, and comes in a brushed nickel finish. This faucet includes a stainless steel pop-up drain for convenience.



Image: Phiestina WF008-5-BN faucet in brushed nickel, installed on a bathroom vanity.

Key Features:

- **8-Inch Widespread Design:** Suitable for 3-hole bathroom/vanity sinks with 6-12 inch widespread hole spacing.
- **Lead-Free Material:** Certified to NSF 61 Lead-free Standards and constructed from 304 stainless steel for safe drinking water.
- **Ceramic Valves:** Equipped with precise ceramic valves to prevent dripping and ensure long-lasting durability.
- **No Splashing Aerator:** Features a German built-in aerator that produces a foam-rich, gentle water flow, minimizing splashing.
- **Durable Finish:** Brushed nickel finish made from A-grade copper with multi-thicken nano electronic plating, offering corrosion resistance and easy cleaning.
- **Easy Installation:** Designed for straightforward installation with quick-connect hoses.
- **Integrated Pop-Up Drain:** Includes a stainless steel pop-up drain with a built-in strainer to collect hair and prevent clogging.

Your browser does not support the video tag.

Video: An overview of the Phiestina WF008-5 widespread bathroom faucet, highlighting its design and features.

2. SPECIFICATIONS

Attribute	Detail
Brand	Phiestina
Model Number	WF008-5-BN (HZ-08-5-L-2)
Color	Brushed Nickel
Mounting Type	Deck Mount
Hole Count	3
Number of Handles	2
Handle Type	Lever
Material	Copper (Faucet Body), Zinc (Handles)
Finish Type	Brushed
Valve Type	Ceramic Cartridge Valve
Flow Rate	1.2 Gallons Per Minute
Spout Height	2.76 Inches (70 mm)
Spout Reach	5.91 Inches (150 mm)
Overall Height	4.72 Inches (120 mm)
Max Countertop Thickness	1.38 Inches (35 mm)
Hole Size Requirement	1.29-1.49 Inches (33-38 mm)
Item Weight	4.11 Pounds
Included Components	Faucet, Handles, Pop-Up Drain, Aerator, Instruction Manual

PRODUCT SIZE

MAX COUNTER
TOP THICKNESS


PRE-DRILLDR HOLD SIZE
REQUIREMENT

DECK THINCKNESSES

35mm / 1.38"

HOLE SIZE

33-38mm / 1.29-1.49"

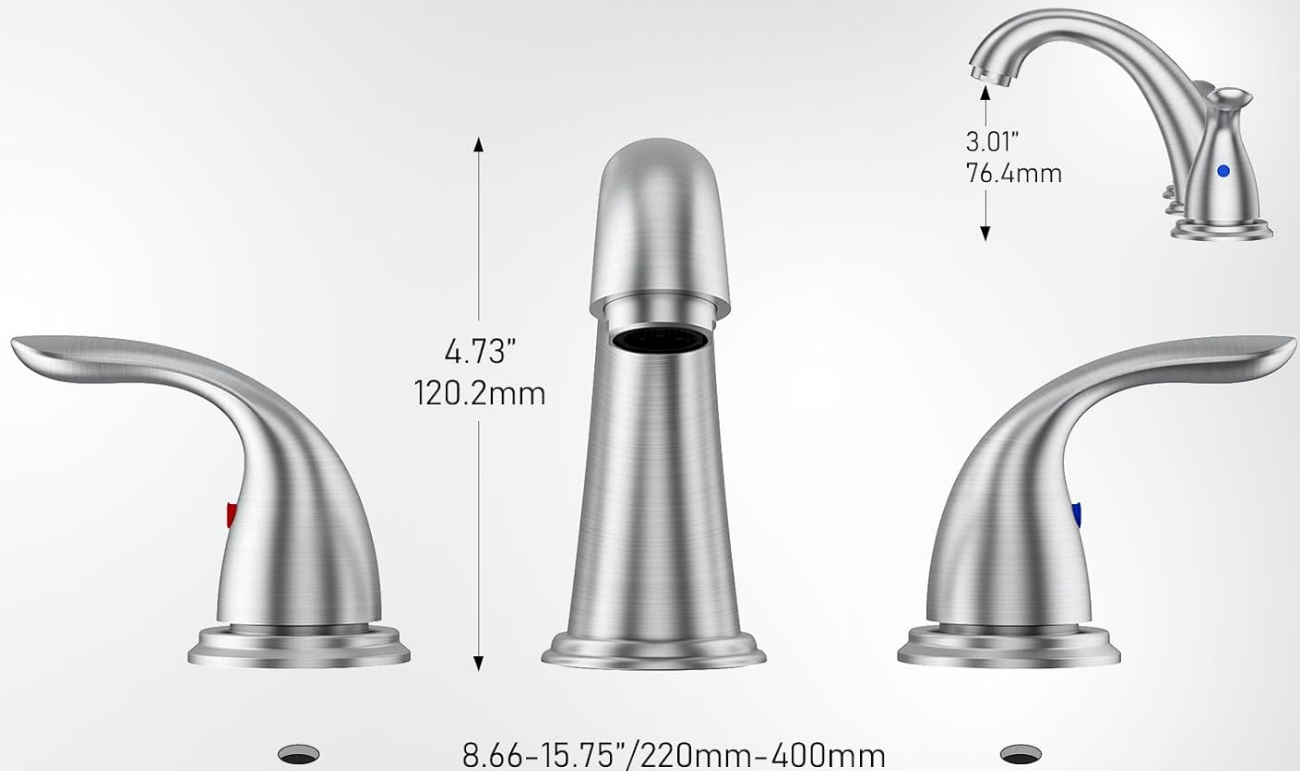

Fit with
8 inch 3 Holes



Image: Detailed product dimensions and sink compatibility requirements.

3. SETUP AND INSTALLATION

Before beginning installation, ensure you have all necessary tools and components. Turn off the main water supply to your bathroom. This faucet is designed for easy installation on 3-hole, 8-inch widespread bathroom/vanity sinks.

Installation Steps:

- 1. Prepare the Sink:** Ensure the sink holes are clean and free of debris. The faucet requires three holes with a diameter of 1.29-1.49 inches (33-38 mm) and a maximum countertop thickness of 1.38 inches (35 mm).
- 2. Install the Faucet Spout:** Insert the faucet spout into the center hole of the sink. Secure it from underneath the sink using the provided mounting hardware. The faucet includes rubber seals, eliminating the need for plumber's putty.
- 3. Install the Handles:** Insert the hot and cold water handles into the left and right holes, respectively. Secure them from underneath the sink.
- 4. Connect Water Supply Lines:** Attach the quick-connect hoses to the hot and cold water inlets on the faucet handles.

Connect the other ends of the hoses to your hot and cold water supply valves. Ensure all connections are tight to prevent leaks.

5. **Install the Pop-Up Drain:** Place the pop-up drain assembly into the sink drain hole. Secure it from underneath the sink. The drain features a push-button mechanism for easy sealing and draining, and includes a built-in strainer.
6. **Test for Leaks:** Once all components are installed and tightened, slowly turn on the main water supply and check for any leaks around the faucet, handles, and drain connections.

Your browser does not support the video tag.

Video: A step-by-step guide demonstrating the installation process for a widespread bathroom faucet.



Image: The stainless steel pop-up drain with its integrated strainer for easy cleaning and clog prevention.

4. OPERATING INSTRUCTIONS

The Phiestina WF008-5-BN faucet features two lever handles for controlling water flow and temperature.

- **Turning On/Off:** Lift either handle to turn on the water. Push down to turn off.
- **Adjusting Temperature:** The left handle controls hot water, and the right handle controls cold water. Adjust both handles to achieve the desired water temperature.
- **Adjusting Flow:** The height to which the handles are lifted controls the water flow rate.
- **Using the Pop-Up Drain:** Press the center of the drain stopper to seal the sink and retain water. Press again to release the stopper and allow water to drain.

NO SPLASHING

GENTLE WATER FLOW

COMFORTABLE SENSE



Image: Demonstrating the gentle, splash-free water flow from the faucet's aerator.

5. MAINTENANCE

Regular maintenance will help preserve the finish and functionality of your Phiestina faucet.

- **Cleaning the Finish:** Clean the brushed nickel finish with a soft, damp cloth. Avoid abrasive cleaners, harsh chemicals, or scouring pads, as these can damage the finish.

- **Cleaning the Aerator:** If water flow decreases or becomes irregular, the aerator may be clogged. Unscrew the aerator from the spout, clean any mineral deposits or debris, and reattach it.
- **Cleaning the Pop-Up Drain:** The pop-up drain's removable stopper and built-in strainer allow for easy cleaning of accumulated hair and debris. Simply remove the stopper, clean the strainer, and reinsert.
- **Checking for Leaks:** Periodically inspect all connections for any signs of leaks. Tighten connections as needed.



Image: The faucet's easy-to-clean surface, designed to resist corrosion and water spots.

6. TROUBLESHOOTING

Refer to the following table for common issues and their solutions.

Problem	Possible Cause	Solution
---------	----------------	----------

Low Water Flow	Clogged aerator; partially closed water supply valves.	Clean the aerator. Ensure water supply valves are fully open.
Leaking from Spout	Worn ceramic cartridge.	Contact customer support for a replacement cartridge.
Leaking from Base of Faucet/Handles	Loose connections; damaged seals.	Tighten mounting nuts. Inspect and replace seals if damaged.
Water Not Draining	Clogged pop-up drain strainer.	Remove and clean the pop-up drain strainer.

LEAKAGE-FREE CONFIDENCE

CERAMIC CARTRIDGE





Image: The internal ceramic cartridge, designed for reliable, leak-free performance.

7. WARRANTY AND SUPPORT

The Phiestina WF008-5-BN faucet comes with a **3-year limited warranty**. This warranty covers defects in material and

manufacturing under normal use.

For assistance, new replacements, or refund inquiries, please contact Phiestina customer support:

- **Customer Support Line:** 422-231-800
- **Website:** phiestinafaucet.com

Phiestina provides 24-hour customer support to ensure a satisfactory experience with our products.

© 2024 Phiestina. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B07C4CQ7CX>

More documents and user manuals: <https://manuals.plus/>