

Q Acoustics 3060s

Q ACOUSTICS 3060s Active Subwoofer User Manual

Model: 3060s

INTRODUCTION

Thank you for choosing the Q Acoustics 3060s Active Subwoofer. This manual provides essential information for the safe and optimal use of your new subwoofer. Please read these instructions carefully before installation and operation. The 3060s subwoofer is designed to deliver deep, impactful bass, enhancing your home cinema or music listening experience. Its slim design allows for flexible placement within your living space.

Your browser does not support the video tag.

An overview video introducing the Q Acoustics 3000i series speaker range, showcasing various models and their design features.

SAFETY INFORMATION

Please observe the following safety precautions to prevent damage to the unit and ensure your safety:

- Read all instructions before operating the product.
- Keep this manual for future reference.
- Do not expose the subwoofer to rain or moisture.
- Do not block any ventilation openings.
- Ensure proper ventilation around the unit.
- Do not place near heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
- Protect the power cord from being walked on or pinched.
- Only use attachments/accessories specified by the manufacturer.
- Unplug this apparatus during lightning storms or when unused for long periods.
- Refer all servicing to qualified service personnel.

WHAT'S IN THE BOX


Upon unpacking your Q Acoustics 3060s Active Subwoofer, please ensure all the following items are present:

- 1 x 3060s Active Subwoofer
- 4 x Spikes
- Mains Cable
- 1 x User Manual (this document)

SETUP

Placement

The Q Acoustics 3060s subwoofer is designed for versatile placement. It can be floor-mounted using the provided rubber feet or spikes, or wall-mounted with an optional, dedicated wall bracket (sold separately). Consider placing the subwoofer in a corner or along a wall for optimal bass response, experimenting with different positions to find the best sound for your room.

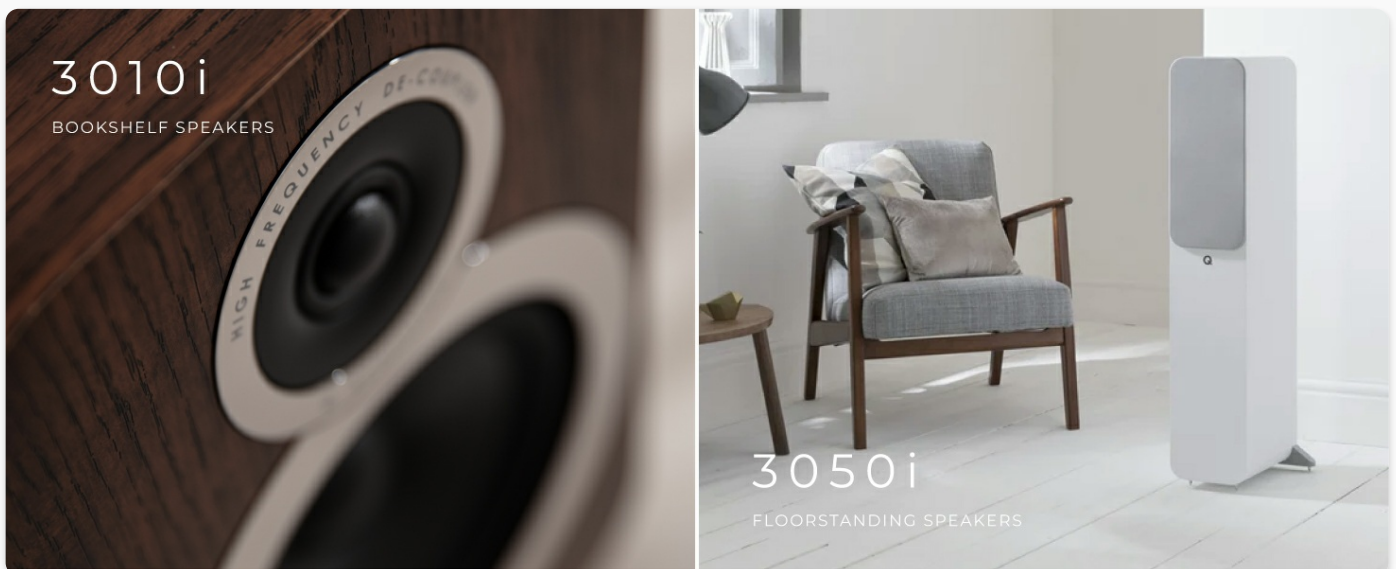

Side view of the Q Acoustics 3060s subwoofer, highlighting its slim profile and suitability for various placements, including wall mounting.

Connections

Connect the subwoofer to your amplifier or AV receiver using an appropriate RCA cable. The controls and connections are discreetly located behind a magnetic hatch with a down-facing port for tidy cable management. Ensure all connections are secure before powering on the unit.

POINT TO POINT BRACING

Q Acoustics P2P™ (Point to Point) bracing supports the parts of the enclosure that need to be stiffened making the enclosures exceptionally rigid, improving the focus of the stereo image and giving the sound-stage more accuracy than ever before.



Rear view of the Q Acoustics 3060s subwoofer, illustrating the recessed terminal panel, level and crossover controls, and spiked feet.

Initial Configuration

After connecting, adjust the 'Level' and 'Crossover' controls located on the recessed panel. The 'Level' control adjusts the subwoofer's volume relative to your main speakers, while the 'Crossover' control sets the frequency at which the subwoofer takes over from your main speakers. A common starting point for the crossover is around 80Hz, but this may vary depending on your main speakers and room acoustics. Fine-tune these settings by listening to various audio content until the bass integrates seamlessly with your system.

Your browser does not support the video tag.

A video demonstrating the unboxing process of the Q Acoustics 3060s Subwoofer, showing how the product is packaged and its initial appearance.

OPERATING INSTRUCTIONS

Power On/Off

The subwoofer typically enters standby mode when not in use and powers on automatically when an audio signal is detected. To fully power off the unit, use the main power switch located on the recessed panel or unplug it from the mains.

Adjusting Sound

The 'Level' and 'Crossover' controls allow you to fine-tune the subwoofer's output. Adjust the 'Level' to match the volume of your main speakers, ensuring the bass is present but not overpowering. The 'Crossover' frequency should be set to blend smoothly with your main speakers, typically where your main speakers start to roll off their bass response. Experiment with these settings to achieve a balanced and immersive sound experience.

POINT TO POINT BRACING

Q Acoustics P2P™ (Point to Point) bracing supports the parts of the enclosure that need to be stiffened making the enclosures exceptionally rigid, improving the focus of the stereo image and giving the sound-stage more accuracy than ever before.



The recessed panel with Level and Crossover controls for sound adjustment.

MAINTENANCE

To maintain the appearance and performance of your subwoofer:

- Clean the cabinet with a soft, dry cloth. Do not use abrasive cleaners or solvents.
- Avoid exposing the unit to direct sunlight or extreme temperatures.
- Ensure adequate ventilation to prevent overheating.

TROUBLESHOOTING

If you encounter issues with your subwoofer, refer to the following common problems and solutions:

- **No Power:** Check the mains cable connection and ensure the power outlet is active. Verify the power switch on the subwoofer is in the 'On' position.
- **No Sound:** Confirm the RCA audio cable is securely connected to both the subwoofer and your amplifier/receiver. Check the 'Level' control on the subwoofer and ensure it is not set to minimum. Verify your amplifier/receiver's subwoofer output settings.
- **Distorted Sound:** Reduce the 'Level' control on the subwoofer. Check your amplifier/receiver's volume and ensure it's not overdriving the subwoofer. Ensure the subwoofer is placed on a stable surface.
- **Humming Noise:** This can often be caused by a ground loop. Try connecting the subwoofer to a different power outlet or using a ground loop isolator if the hum persists.


SPECIFICATIONS



Key specifications of the Q Acoustics 3060s subwoofer.

Q Acoustics 3060s Active Subwoofer Specifications

Feature	Detail
Enclosure Type	Infinite Baffle
Bass Driver	200mm (8 in)
Frequency Response (+3 dB, -6 dB)	35–250 Hz
Internal Amplifier Power	150W Class D
Cross-over Frequency	35–250Hz (variable)
Dimensions (WxHxD)	480 x 300 x 150 mm (18.9" x 11.8" x 5.9")
Weight	8.5 kg (18.7 lbs)
Connectivity Technology	Wired
Mounting Type	Wall Mount, Floor Mount
Color	Carbon Black

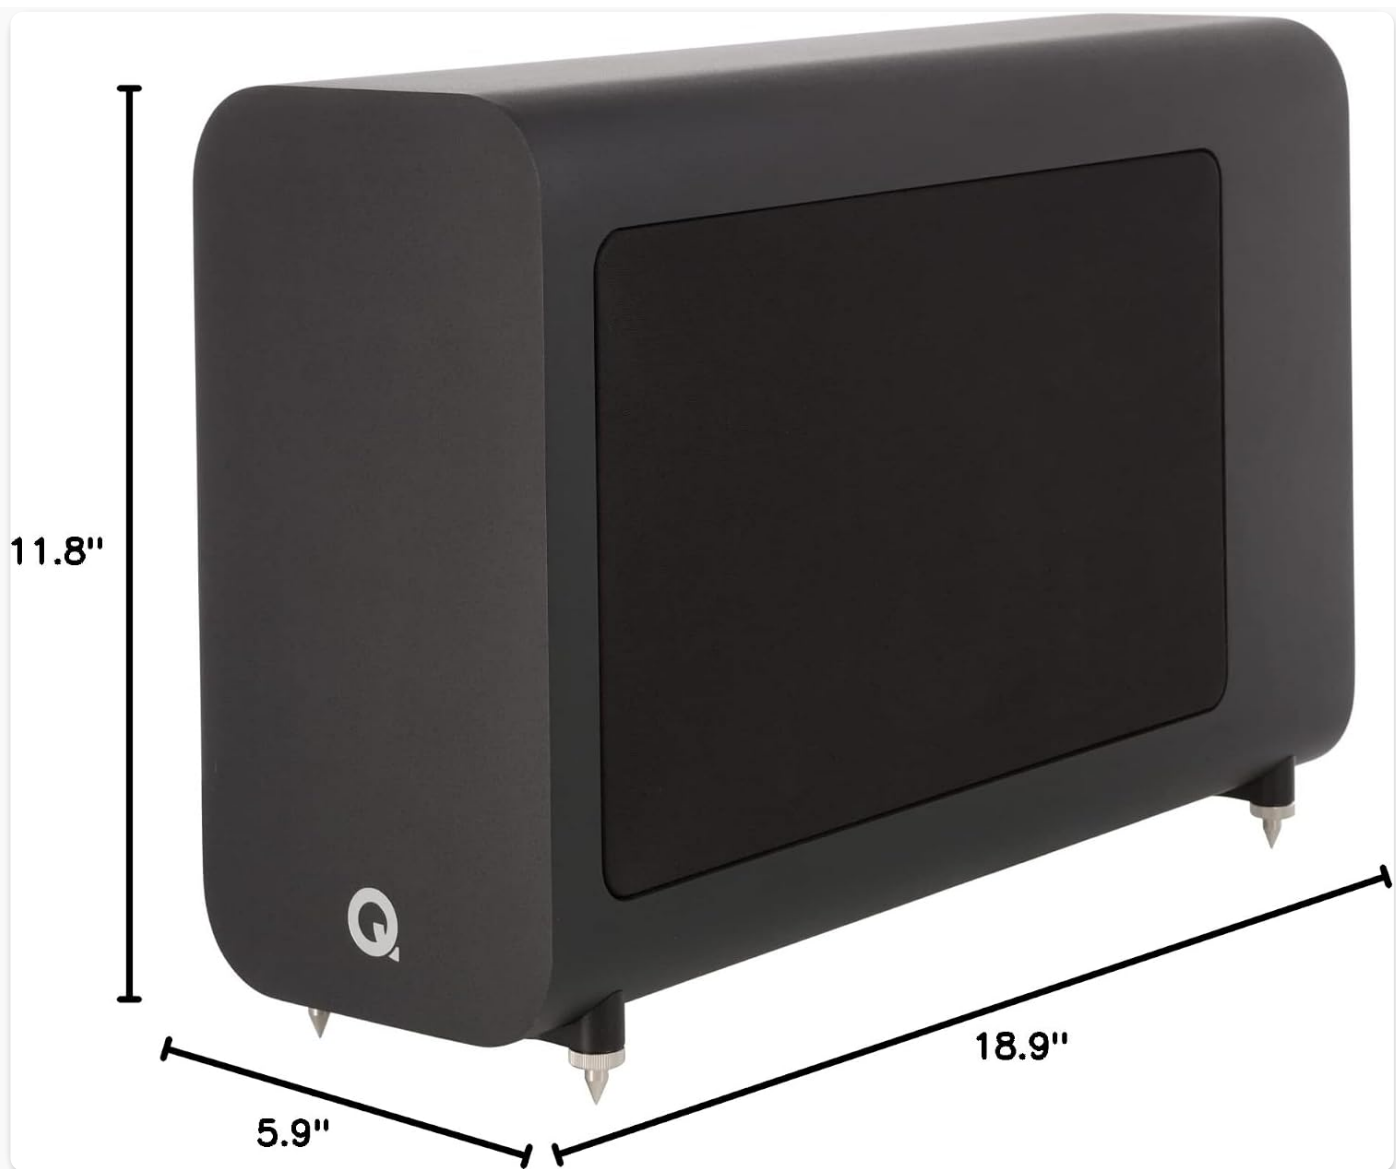

Visual representation of the Q Acoustics 3060s subwoofer dimensions.

WARRANTY INFORMATION

Q Acoustics products are manufactured to the highest standards and are warranted against defects in materials and workmanship. The specific warranty period and terms may vary by region and retailer. Please retain your proof of purchase for any warranty claims. For detailed warranty information, refer to the documentation provided with your product or visit the official Q Acoustics website.

SUPPORT

For further assistance, technical support, or to inquire about accessories, please visit the official Q Acoustics website or contact their customer service department.

[Visit the Q Acoustics Store](#)

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question