

Peteme SG-SML-14W-C02

# Peteme Smart LED Flush Mount Disk Light User Manual

Model: SG-SML-14W-C02

## 1. INTRODUCTION

Thank you for choosing the Peteme Smart LED Flush Mount Disk Light. This product is designed to provide versatile and intelligent lighting for your home, featuring RGBWW color changing, dimmable functionality, and smart control options. This manual provides detailed instructions for safe installation, operation, and maintenance of your new smart light.

### Key Features:

- **RGBCW Parameter:** 14W (1150 Lumens) with tunable 2700K-6500K cool & warm white.
- **Color Changing:** RGB with 16 million colors and 1-100% dimmable brightness.
- **Smart Control:** Compatible with Alexa and Google Assistant for voice control.
- **App Control:** Remotely control via the Smart Life APP (2.4 GHz Wi-Fi required).
- **Group Control & Scheduling:** Manage multiple lights simultaneously and set automated schedules.
- **Music Sync:** Lights synchronize with music rhythm received by the APP.
- **Certifications:** ETL-Listed and FCC compliant.
- **Installation:** Suitable for 3.5/4 inch J-Box or 5/6 inch recessed can installations.

# Smart Disk Lights VS Disk Lights



Image 1: Comparison highlighting the features of Peteme Smart Disk Light, including 14W wattage, 1150LM brightness, ETL listing, FCC ID, two installation options (3.5/4 inch J-box or 5/6 inch can), Smart APP/Alexa/Hub control, and 16 million colors, contrasted with a generic disk light.

## 2. SAFETY INFORMATION

Please read all safety instructions before installation and use. Keep this manual for future reference.

- **Electrical Safety:** Always turn off power at the circuit breaker before installation or maintenance. If you are unsure about electrical wiring, consult a qualified electrician.
- **Compatibility:** This smart light only supports 2.4 GHz Wi-Fi networks. It is **NOT** compatible with traditional dimmer switches. Use the Smart Life APP or voice control for dimming.
- **Environment:** Suitable for dry and damp locations. Do not expose to direct water spray or submersion.
- **Handling:** Do not attempt to disassemble or modify the light fixture.

### 3. SETUP AND INSTALLATION

---

#### What's in the Box:


- Peteme Smart LED Flush Mount Disk Light
- J-Box (included with light)
- User Manual

#### Installation Steps:

1. **Turn Off Power:** Before starting, ensure the power to the installation area is turned off at the circuit breaker.
2. **Choose Installation Type:** The light supports two main installation methods: Junction-Box Installation (3.5" or 4" J-Box) or Recessed Can Installation (5" or 6" can).
3. **Wiring:** Connect the light's wires to your household wiring (black to black, white to white, ground to ground) using appropriate wire connectors.
4. **Mounting:**
  - **For J-Box:** Secure the light fixture to the junction box using the provided screws.
  - **For Recessed Can:** Insert the light into the recessed can and secure it using the spring clips.
5. **Restore Power:** Once securely installed, turn the power back on at the circuit breaker.

# Easy to install

## JUNCTION-BOX INSTALLATION 2.75" 3.5" OR 4" J-BOX

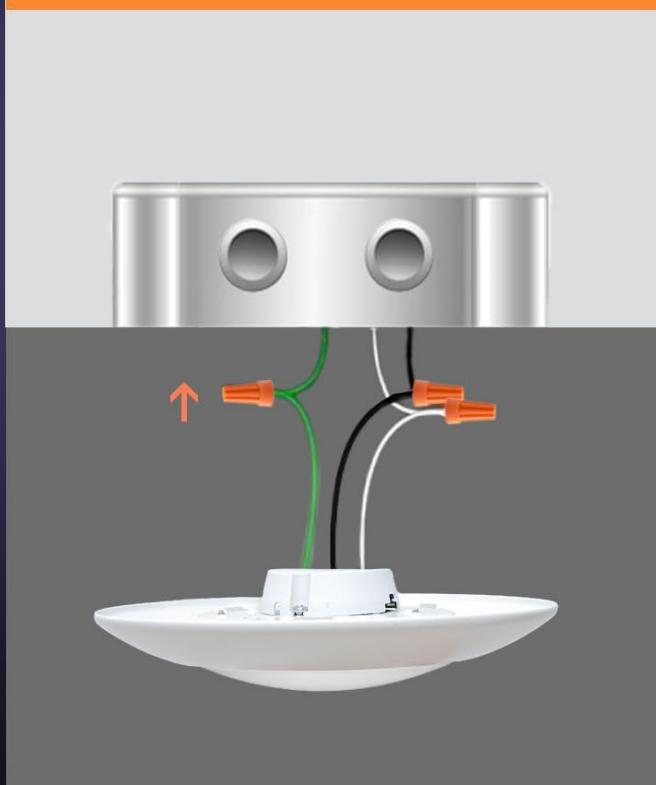

## RECESSED CAN INSTALLATION BOTH 5" AND 6" CAN



Image 2: Visual guide demonstrating two installation methods: Junction-Box Installation for 2.75", 3.5" or 4" J-Box, and Recessed Can Installation for both 5" and 6" cans, showing wiring connections and mounting.

### Initial Setup (App & Wi-Fi):

1. **Download App:** Download the 'Smart Life' app from your smartphone's app store.
2. **Register/Login:** Create an account or log in to the Smart Life app.
3. **Add Device:** Follow the in-app instructions to add your new Peteme Smart LED Flush Mount Disk Light. Ensure your phone is connected to a 2.4 GHz Wi-Fi network during this process. The light requires the included hub for connection.
4. **Pairing Mode:** The light will typically enter pairing mode automatically when first powered on. If not, cycle the power (on/off) a few times until the light blinks rapidly.
5. **Complete Setup:** Once the light is detected and connected, you can rename it and assign it to a room within the app.

### 4. OPERATING INSTRUCTIONS

Smart Life App Control:

The Smart Life app provides full control over your Peteme Smart LED Flush Mount Disk Light.

- **On/Off:** Toggle the light on or off.
- **Brightness Adjustment:** Adjust the brightness from 1% to 100%.
- **Color Temperature:** Change the white light from warm (2700K) to cool (6500K).
- **RGB Colors:** Select from 16 million RGB colors to create various ambiances.
- **Scene Modes:** Choose from pre-set scenes or create custom ones for different activities (e.g., Reading, Night, Leisure, Colorful).
- **Music Sync:** Activate music mode to synchronize the light's effects with the rhythm detected by the app.



8 Dynamic Scenes and Sync to Music

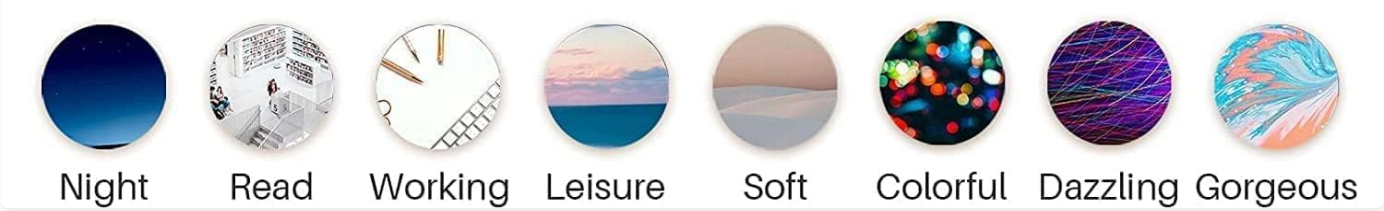


Image 3: Illustration of various dynamic scenes and the music sync feature, depicting different lighting moods for activities like reading, night, leisure, and colorful party settings.

Group Control and Scheduling:

- **Group Lights:** In the Smart Life app, you can group multiple Peteme smart lights together to control them simultaneously. This is useful for managing lights in a single room or area.
- **Set Schedules/Timers:** Create schedules to automatically turn lights on or off at specific times, individually or in groups. This can be used for daily routines or security purposes.

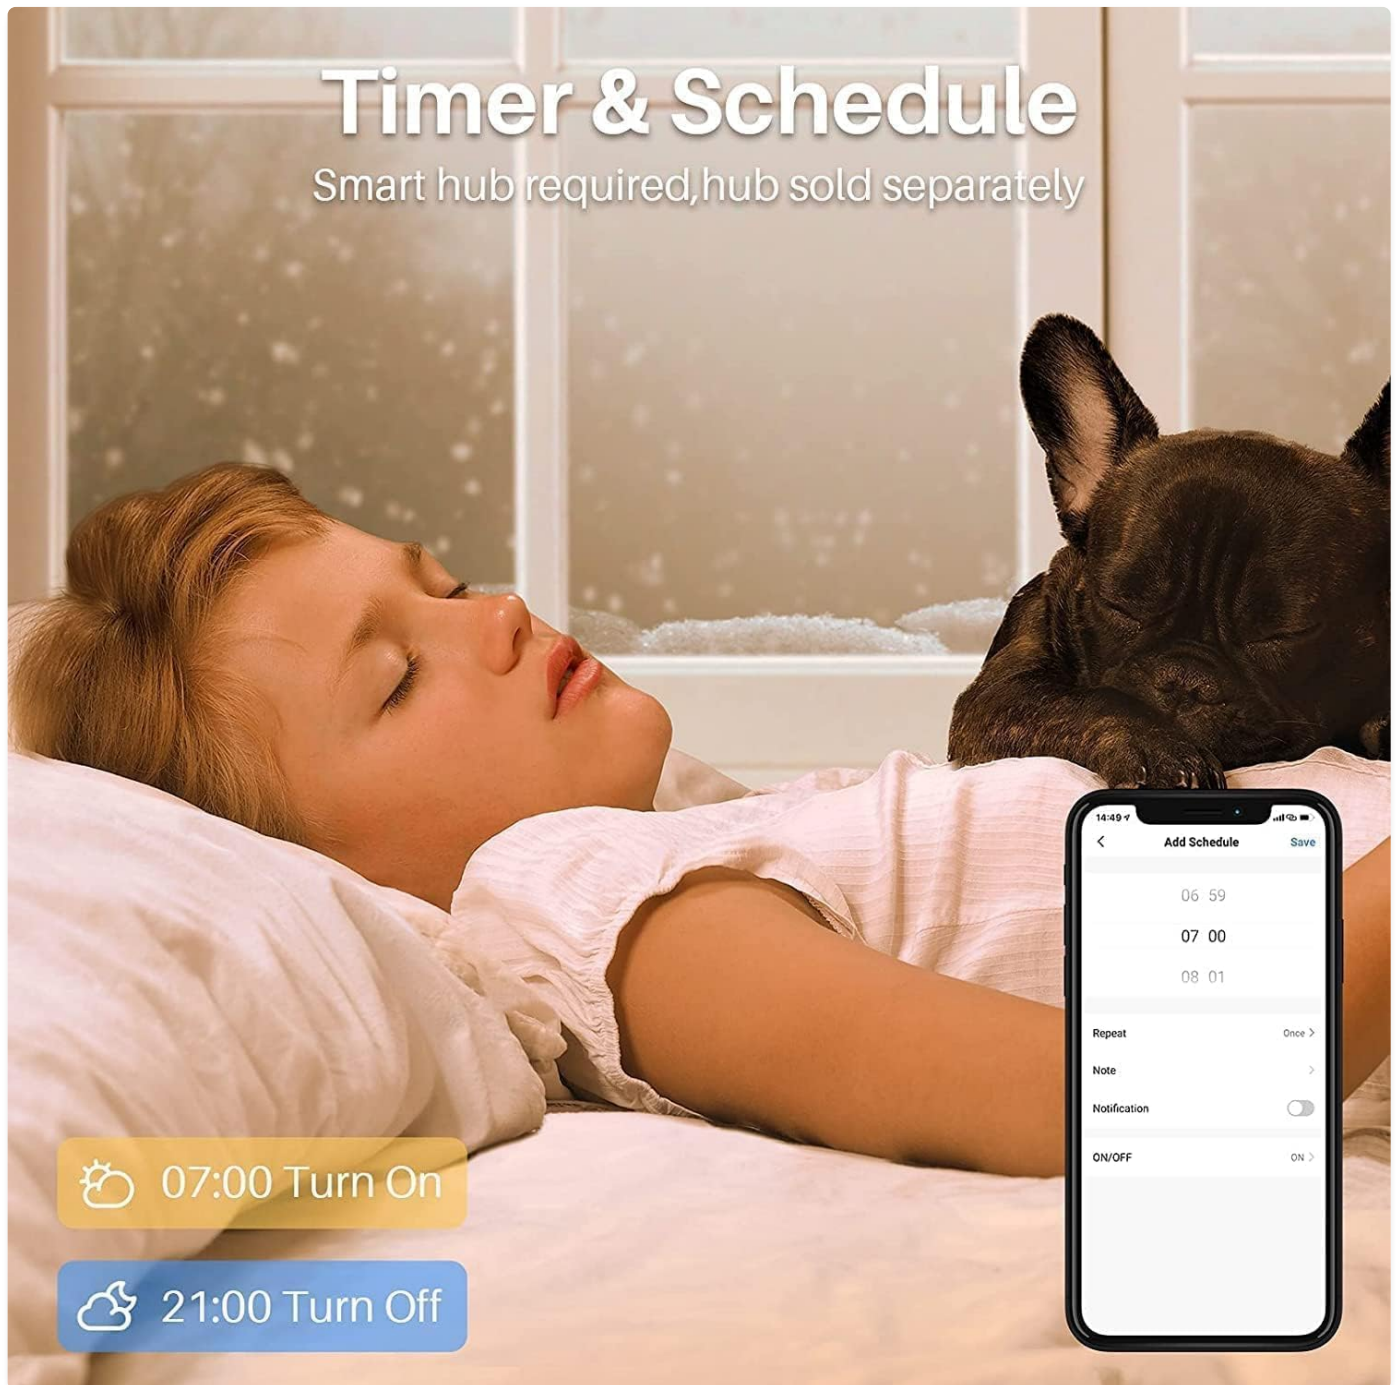


Image 4: A visual representation of setting up a timer and schedule for the smart light via a smartphone app, showing options for 'Turn On' at 07:00 and 'Turn Off' at 21:00.

### Voice Control (Alexa/Google Assistant):

Integrate your Peteme Smart LED Flush Mount Disk Light with Amazon Alexa or Google Assistant for convenient voice control.

1. **Link Accounts:** In the Alexa or Google Home app, link your Smart Life account.
2. **Discover Devices:** Ask your voice assistant to discover new devices.
3. **Voice Commands:** Use simple commands such as:

- "Alexa, turn on the bedroom lights."
- "Hey Google, dim the living room light to 50%."
- "Alexa, change the kitchen light to blue."

# App & Voice Control

Don't have to get out of bed to turn off the light anymore.

Alexa, Turn off the bedroom lights

OK !



Image 5: A user interacting with a smartphone and smart speakers (Alexa and Google Assistant) to control the light, illustrating the convenience of app and voice control.

## 5. MAINTENANCE

The Peteme Smart LED Flush Mount Disk Light requires minimal maintenance.

- **Cleaning:** Ensure the power is off before cleaning. Wipe the fixture with a soft, dry, or slightly damp cloth. Do not use

harsh chemicals or abrasive cleaners.

- **Bulb Replacement:** The LED light source is integrated and not user-replaceable.
- **Regular Checks:** Periodically check for any loose connections or damage. If any issues are found, turn off power and consult a qualified technician.

## 6. TROUBLESHOOTING

If you encounter issues with your Peteme Smart LED Flush Mount Disk Light, refer to the following common solutions:

| Problem                               | Possible Cause                                             | Solution                                                                                                    |
|---------------------------------------|------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| Light does not turn on.               | No power, loose wiring, faulty fixture.                    | Check circuit breaker. Ensure wiring is secure. If problem persists, contact support.                       |
| Cannot connect to Wi-Fi.              | Incorrect Wi-Fi band, weak signal, incorrect pairing mode. | Ensure your router is 2.4 GHz. Move closer to the router. Cycle power to enter pairing mode (light blinks). |
| Voice control not working.            | Accounts not linked, device not discovered.                | Verify Smart Life account is linked in Alexa/Google Home app. Ask assistant to discover devices.            |
| Light flickers or dims unexpectedly.  | Incompatible dimmer switch, unstable power.                | <b>Do not use with traditional dimmer switches.</b> Ensure stable power supply.                             |
| Colors are incorrect or unresponsive. | App glitch, temporary communication error.                 | Restart the Smart Life app. Cycle power to the light. Re-pair if necessary.                                 |

## 7. SPECIFICATIONS

| Attribute         | Detail                                                                        |
|-------------------|-------------------------------------------------------------------------------|
| Model Number      | SG-SML-14W-C02                                                                |
| Wattage           | 14W (10 watts listed in some specifications, refer to 14W for smart features) |
| Luminous Flux     | 1150 Lumens                                                                   |
| Color Temperature | 2700K-6500K (Tunable White) + RGB                                             |
| Voltage           | 120 volts AC                                                                  |
| Power Source      | AC                                                                            |
| Light Source Type | LED                                                                           |
| Material          | Metal                                                                         |
| Shape             | Round                                                                         |
| Color             | Gray White                                                                    |

| Attribute              | Detail                                  |
|------------------------|-----------------------------------------|
| Item Weight            | 10.08 ounces                            |
| Dimensions (L x W x H) | 4.72" x 4.72" x 1.97"                   |
| Certifications         | ETL-Listed, FCC compliant, IC Rated     |
| Wi-Fi Compatibility    | 2.4 GHz only                            |
| Control Method         | Smart Life APP, Alexa, Google Assistant |

## 8. WARRANTY AND SUPPORT

### Warranty Information:

This Peteme Smart LED Flush Mount Disk Light comes with a**1-year manufacturer's warranty**. This warranty covers defects in materials and workmanship under normal use. It does not cover damage caused by improper installation, misuse, accidents, or unauthorized modifications.

### Customer Support:

For technical assistance, warranty claims, or any questions regarding your Peteme product, please contact our customer support team. Refer to the contact information provided with your purchase or visit the official Peteme website for support details.

When contacting support, please have your product model number (SG-SML-14W-C02) and purchase date ready.

© 2023 Peteme. All rights reserved.

### ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

#### Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

#### Answered questions about this manual

##### **Why won't my Peteme SG-SML-14W-C02 Smart LED Flush Mount Disk Lights pair or be recognized by the app?**

If your Peteme SG-SML-14W-C02 Smart LED Flush Mount Disk Lights are not being recognized or pairing correctly, please check the following common requirements and troubleshooting steps: Wi-Fi Frequency: These lights only support 2.4 GHz...

[Read full answer](#)

---

Open the live page

<https://manuals.plus/asin/B0G2LKVJ9L>

More documents and user manuals: <https://manuals.plus/>