Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

Nobsound NS-01G Pro

Nobsound NS-01G Pro Bluetooth 5.0 HiFi Power Amplifier User Manual

Model: NS-01G Pro

1. Introduction

Thank you for purchasing the Nobsound NS-01G Pro Bluetooth 5.0 HiFi Power Amplifier. This compact yet powerful amplifier is designed to deliver high-fidelity audio to your passive speakers, offering versatile connectivity options including Bluetooth, AUX, and USB. Please read this manual carefully to ensure proper setup, operation, and maintenance of your device.

2. Package Contents

Please check the package for the following items:

- 1 x Nobsound NS-01G Pro Power Amplifier
- 1 x DC 19V Power Adapter
- 1 x 3.5mm to RCA Audio Cable
- 1 x USB Cable
- 1 x User Manual



Figure 2.1: Package contents and amplifier dimensions. The image shows the amplifier, power adapter, 3.5mm-RCA cable, USB cable, and user manual, along with the amplifier's measurements (78mm x 70mm x 38mm).

3. Product Overview

3.1 Front Panel Controls and Inputs

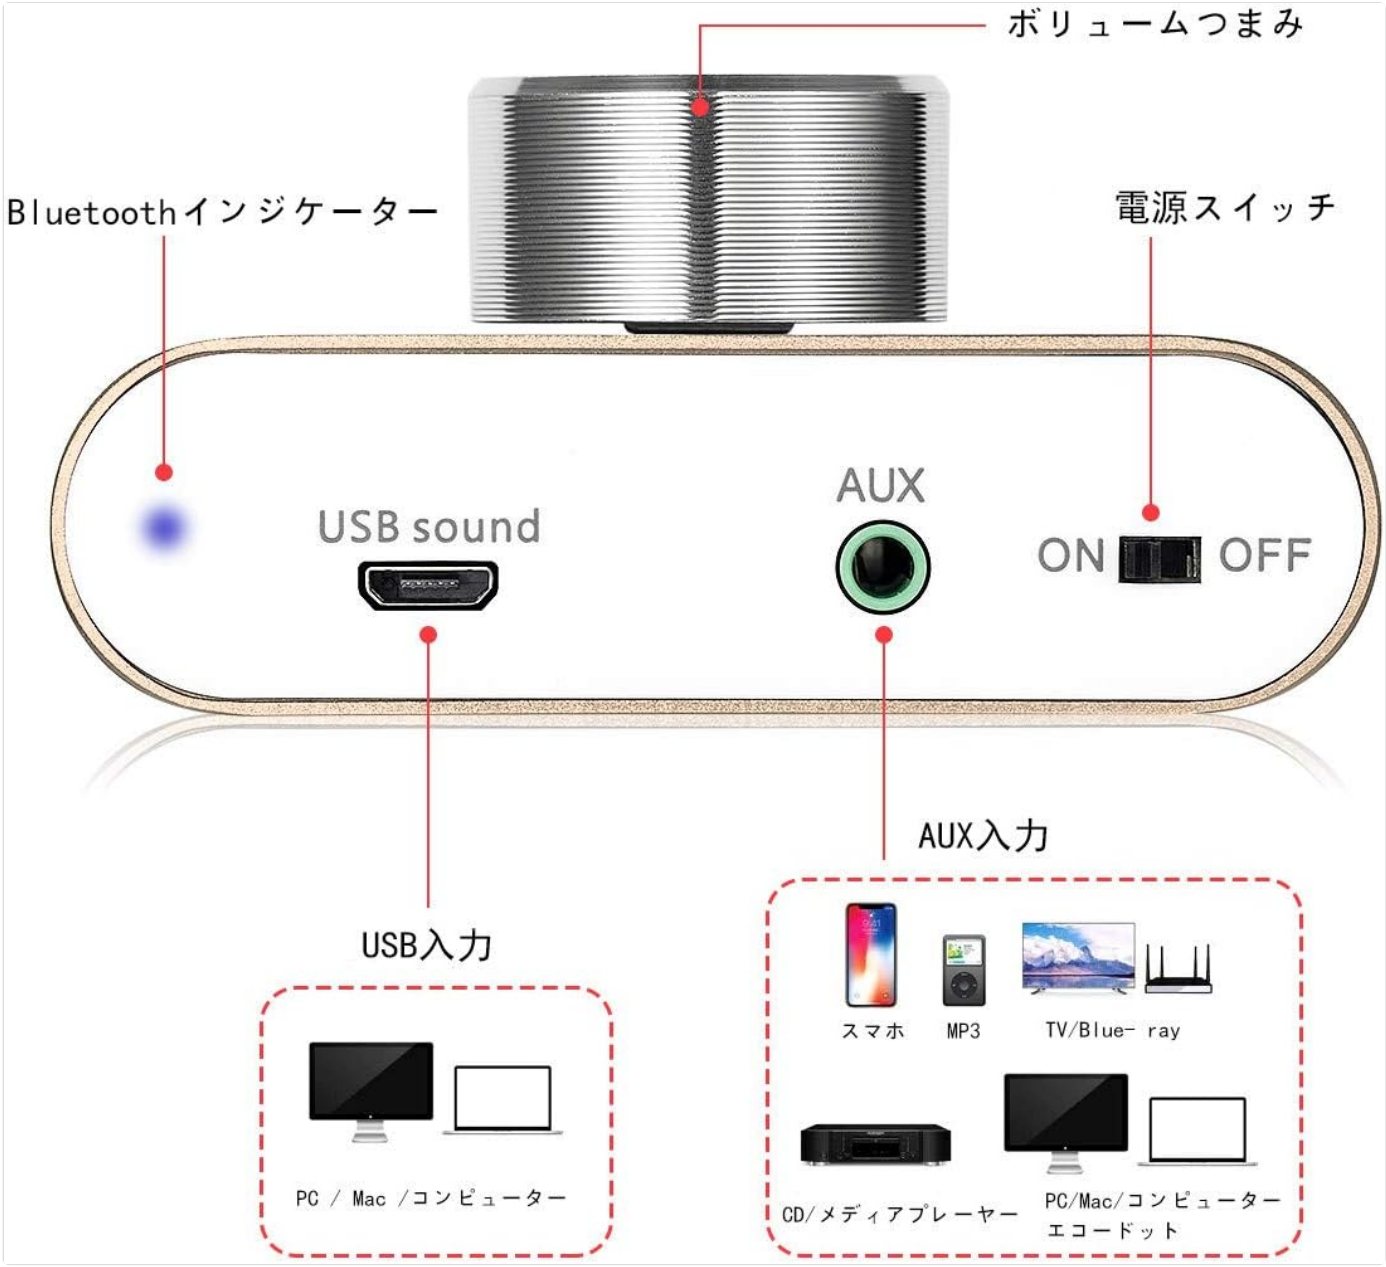

Figure 3.1: Detailed diagram of the amplifier's front panel, labeling the volume knob, Bluetooth indicator, power switch, USB input, and AUX input with examples of compatible devices.

- **Volume Knob:** Rotates to adjust the audio output level.
- **Bluetooth Indicator:** LED light indicates Bluetooth status (blinking for pairing, solid for connected).
- **USB Sound Input:** Connects to a computer (PC/Mac) for digital audio input.
- **AUX Input:** 3.5mm stereo input for connecting analog audio sources like smartphones, MP3 players, TVs, or CD players.
- **ON/OFF Switch:** Toggles the amplifier's power.

3.2 Rear Panel Connections



Figure 3.2: Detailed diagram of the amplifier's rear panel, showing DC 9V-24V power input and speaker terminals (R and L channels) with connection options for banana plugs or bare wire, and examples of speaker types.

- **DC 9V-24V IN:** Power input jack. Connect the provided DC 19V power adapter here.
- **Speaker Terminals (R+, R-, L+, L-):** Connect your passive speakers. These terminals support both banana plugs and bare speaker wire. Ensure correct polarity (+ to + and - to -).



Figure 3.3: The Nobsound NS-01G Pro amplifier held in hand, showcasing its compact size.

4. Setup

1. **Connect Speakers:** Connect your passive speakers to the speaker terminals on the rear panel. Ensure that the positive (+) terminal of the amplifier connects to the positive (+) terminal of the speaker, and the negative (-) terminal of the amplifier connects to the negative (-) terminal of the speaker for both left (L) and right (R) channels. The terminals accept banana plugs or bare wire.
2. **Connect Power:** Insert the DC plug of the provided 19V power adapter into the

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B07D4H44KD

More documents and user manuals: **https://manuals.plus/**