

[Manuals.plus](#) /

> [Ewatchparts](#) /

> Ewatchparts Stainless Steel Watch Band Link Instruction Manual for Tag Heuer Aquaracer Watches

Ewatchparts Aquaracer FM0192, BA0815, FAA029, CAF2112, CAF2010, CAF2011, CAF2012, CAF2013, CAF2014, CAF2015, CAF5010, CAF5011, CAF70

Ewatchparts Stainless Steel Watch Band Link Instruction Manual

For Tag Heuer Aquaracer Watches

1. INTRODUCTION

This instruction manual provides essential information for the proper installation and care of your Ewatchparts replacement watch band link. This aftermarket link is designed to be compatible with specific Tag Heuer Aquaracer watch models. Please read these instructions carefully before proceeding with installation to ensure correct fitment and optimal performance.

2. PRODUCT OVERVIEW

The Ewatchparts replacement watch band link is an 18mm solid stainless steel component. It features a polished (shiny) center finish complemented by a brushed (matte) finish on the sides, designed to match the aesthetic of original Tag Heuer Aquaracer bands. Each link includes a corresponding pin for secure attachment.



Figure 2.1: Ewatchparts replacement watch band link with included pins. The link features a shiny center and matte sides.

3. PACKAGE CONTENTS

Upon opening the package, verify that all components are present:

- 1 x Stainless Steel Watch Band Link (18mm width, 12mm length)
- 1 x Link Pin

4. COMPATIBILITY


This replacement link is specifically designed for the following Tag Heuer Aquaracer watch models:

- Tag Heuer Aquaracer FM0192
- Tag Heuer Aquaracer BA0815
- Tag Heuer Aquaracer FAA029
- Tag Heuer Aquaracer CAF2112
- Also compatible with: CAF2010, CAF2011, CAF2012, CAF2013, CAF2014, CAF2015, CAF5010, CAF5011, CAF7010, CAF7011, CAF7012, CAF7013.

Important: Before installation, it is crucial to verify your specific watch model number and the part number

on your existing clasp (e.g., FM0191 or FAA029) to ensure proper compatibility. This link measures 12mm (1/2 inch) in total length and 18mm in width.

LINKS ARE SIZE & MODEL SPECIFIC

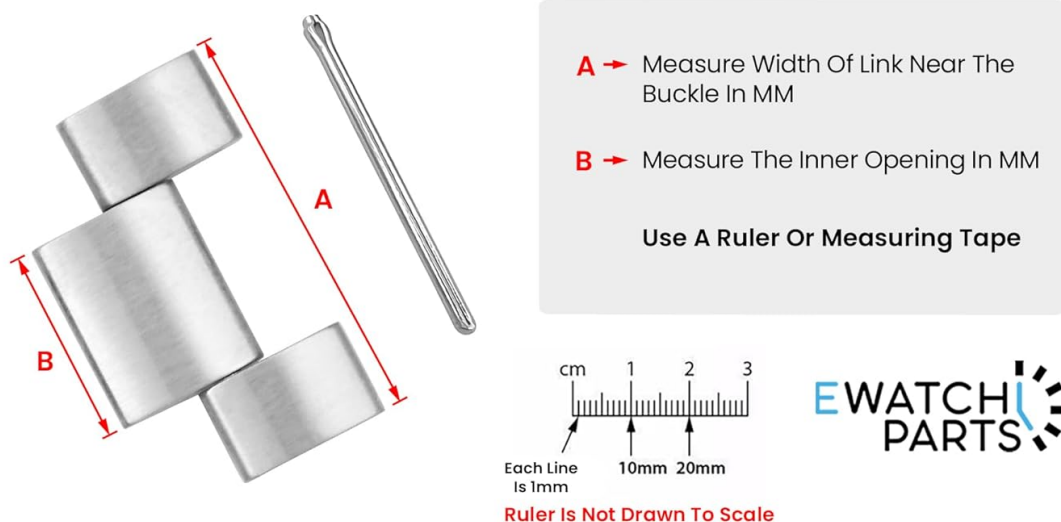

CHECK SIZE & MODEL BEFORE ORDERING

Copyright 2025, by Ewatchparts. All text and graphics are protected by US and International Copyright Laws, and may not be copied, reprinted, published, or otherwise distributed by any means.

Figure 4.1: Guide for measuring watch link dimensions. Measure the width of the link near the buckle (A) and the inner opening (B) in millimeters to confirm size.

5. INSTALLATION INSTRUCTIONS

This section outlines the general procedure for adding or replacing a watch band link. If you are unsure about any step, it is recommended to seek assistance from a professional watchmaker.

- 1. Prepare Your Workspace:** Lay your watch and the new link on a clean, soft surface to prevent scratches.
- 2. Identify Link Pins:** Locate the pins that secure the existing links in your watch band. These are typically small metal rods that pass through the links.
- 3. Remove Existing Pin (if replacing):** Using a watch link removal tool or a small, pointed object (like a pushpin or a specialized pin pusher), carefully push the pin out from the side of the link. Apply steady pressure. Some pins may have arrows indicating the direction for removal.
- 4. Insert New Link:** Align the new Ewatchparts link with the existing band sections where you intend to add or replace a link.
- 5. Insert New Pin:** Carefully insert the provided pin through the aligned holes of the watch band sections and the new link. Ensure the pin is fully seated and flush with the sides of the link. You may need to gently tap it with a small, soft hammer or the handle of a tool.
- 6. Verify Security:** Gently flex the watch band to ensure the new link is securely attached and moves freely without excessive play.

Note: The provided pin is designed for a seamless fit. Do not force the pin if it does not align correctly, as

this may damage the link or your watch band.

6. MAINTENANCE

To maintain the appearance and longevity of your stainless steel watch band link:

- **Cleaning:** Wipe the link regularly with a soft, damp cloth to remove dirt, oils, and perspiration. For deeper cleaning, a mild soap solution can be used, followed by thorough rinsing and drying.
- **Avoid Harsh Chemicals:** Do not expose the link to harsh chemicals, solvents, or abrasive cleaners, as these can damage the finish.
- **Storage:** When not in use, store your watch in a clean, dry place, away from extreme temperatures and direct sunlight.

7. SPECIFICATIONS

Feature	Detail
Material	Solid Stainless Steel
Link Width	18mm
Total Link Length	12mm (1/2 Inch)
Finish	Shiny center with matte sides
Included Components	1 Link, 1 Pin

8. TROUBLESHOOTING

If you encounter issues during installation or with the fit of the link, consider the following:

- **Link Does Not Fit:**
 - Double-check your watch's model number against the compatibility list in Section 4.
 - Measure the width and inner opening of your existing links as shown in Figure 4.1 to confirm the required size.
 - Ensure the part number on your clasp (e.g., FM0191 or FAA029) matches the specified compatible models.
- **Pin Does Not Insert Easily:**
 - Verify that the holes in the link and band sections are perfectly aligned.
 - Ensure you are inserting the pin in the correct direction if there are directional arrows on your original band.

If problems persist after following these steps, professional assistance from a watchmaker is recommended.

9. SUPPORT

For further assistance or inquiries regarding your Ewatchparts product, please refer to the seller's contact information on the platform where the purchase was made. While this product is an aftermarket

replacement, Ewatchparts strives to provide quality components and support for its customers.
This aftermarket link does not feature any logos or markings from the original watch manufacturer.