

[Manuals.plus](#) /

› [Mifaso](#) /

› Mifaso PD30W Desk Clamp Power Strip User Manual

Mifaso PD30W

Mifaso PD30W Desk Clamp Power Strip User Manual

Model: PD30W

INTRODUCTION

The Mifaso PD30W Desk Clamp Power Strip is designed to provide convenient power access and charging capabilities directly at your workspace. This 8-in-1 unit features 4 AC outlets, 2 USB-A ports, and 1 USB-C port with 30W Power Delivery, all integrated into a compact, clamp-on design. It includes surge protection to safeguard your electronic devices.

SETUP INSTRUCTIONS


1. Clamp Installation

The power strip features a clamp-on design for easy, tool-free installation. Ensure your desk or tabletop edge has a thickness between 0.5 inches (1.27 cm) and 1.96 inches (5 cm) for proper fit. The clamp includes foam pads to protect your desk surface from scratches.

1. Position the power strip on the edge of your desk where you intend to install it.
2. Align the clamp with the underside of the desk edge.
3. Tighten the screw on the clamp until the power strip is securely fastened and does not wobble. Do not overtighten.

Mounting thickness 1.96 inch Max

The desk clamp comes with Silicone pads to hold your powerstrip securely in place.

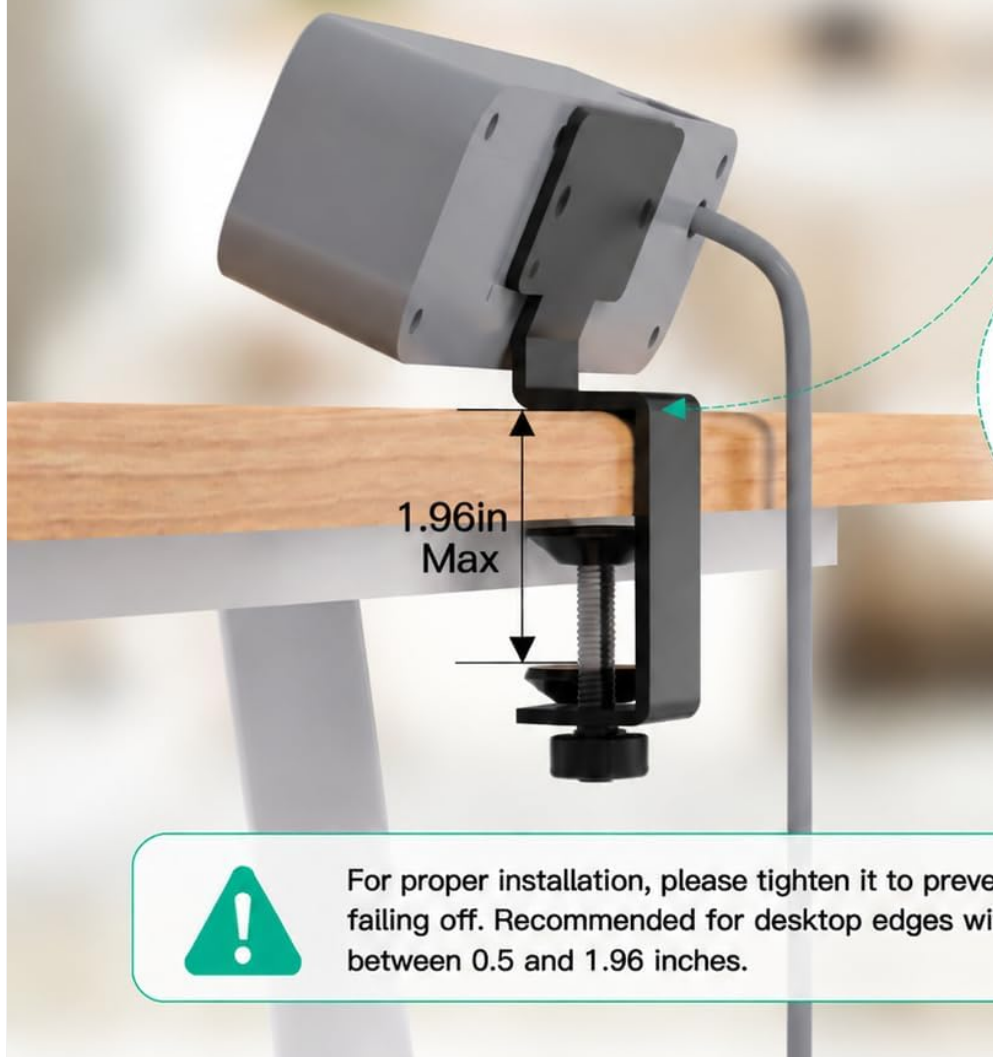

For proper installation, please tighten it to prevent it from falling off. Recommended for desktop edges with a thickness between 0.5 and 1.96 inches.

Image: Clamp installation diagram with desk thickness specifications.

2. Power Connection

Once securely clamped, plug the power strip's 5-foot extension cord into a standard 125V AC wall outlet. The power strip is now ready for use.

OPERATING INSTRUCTIONS

1. Using AC Outlets

The power strip features 4 widely-spaced AC outlets, designed to accommodate bulky power adapters without blocking adjacent outlets. Simply plug your devices into the available AC sockets.

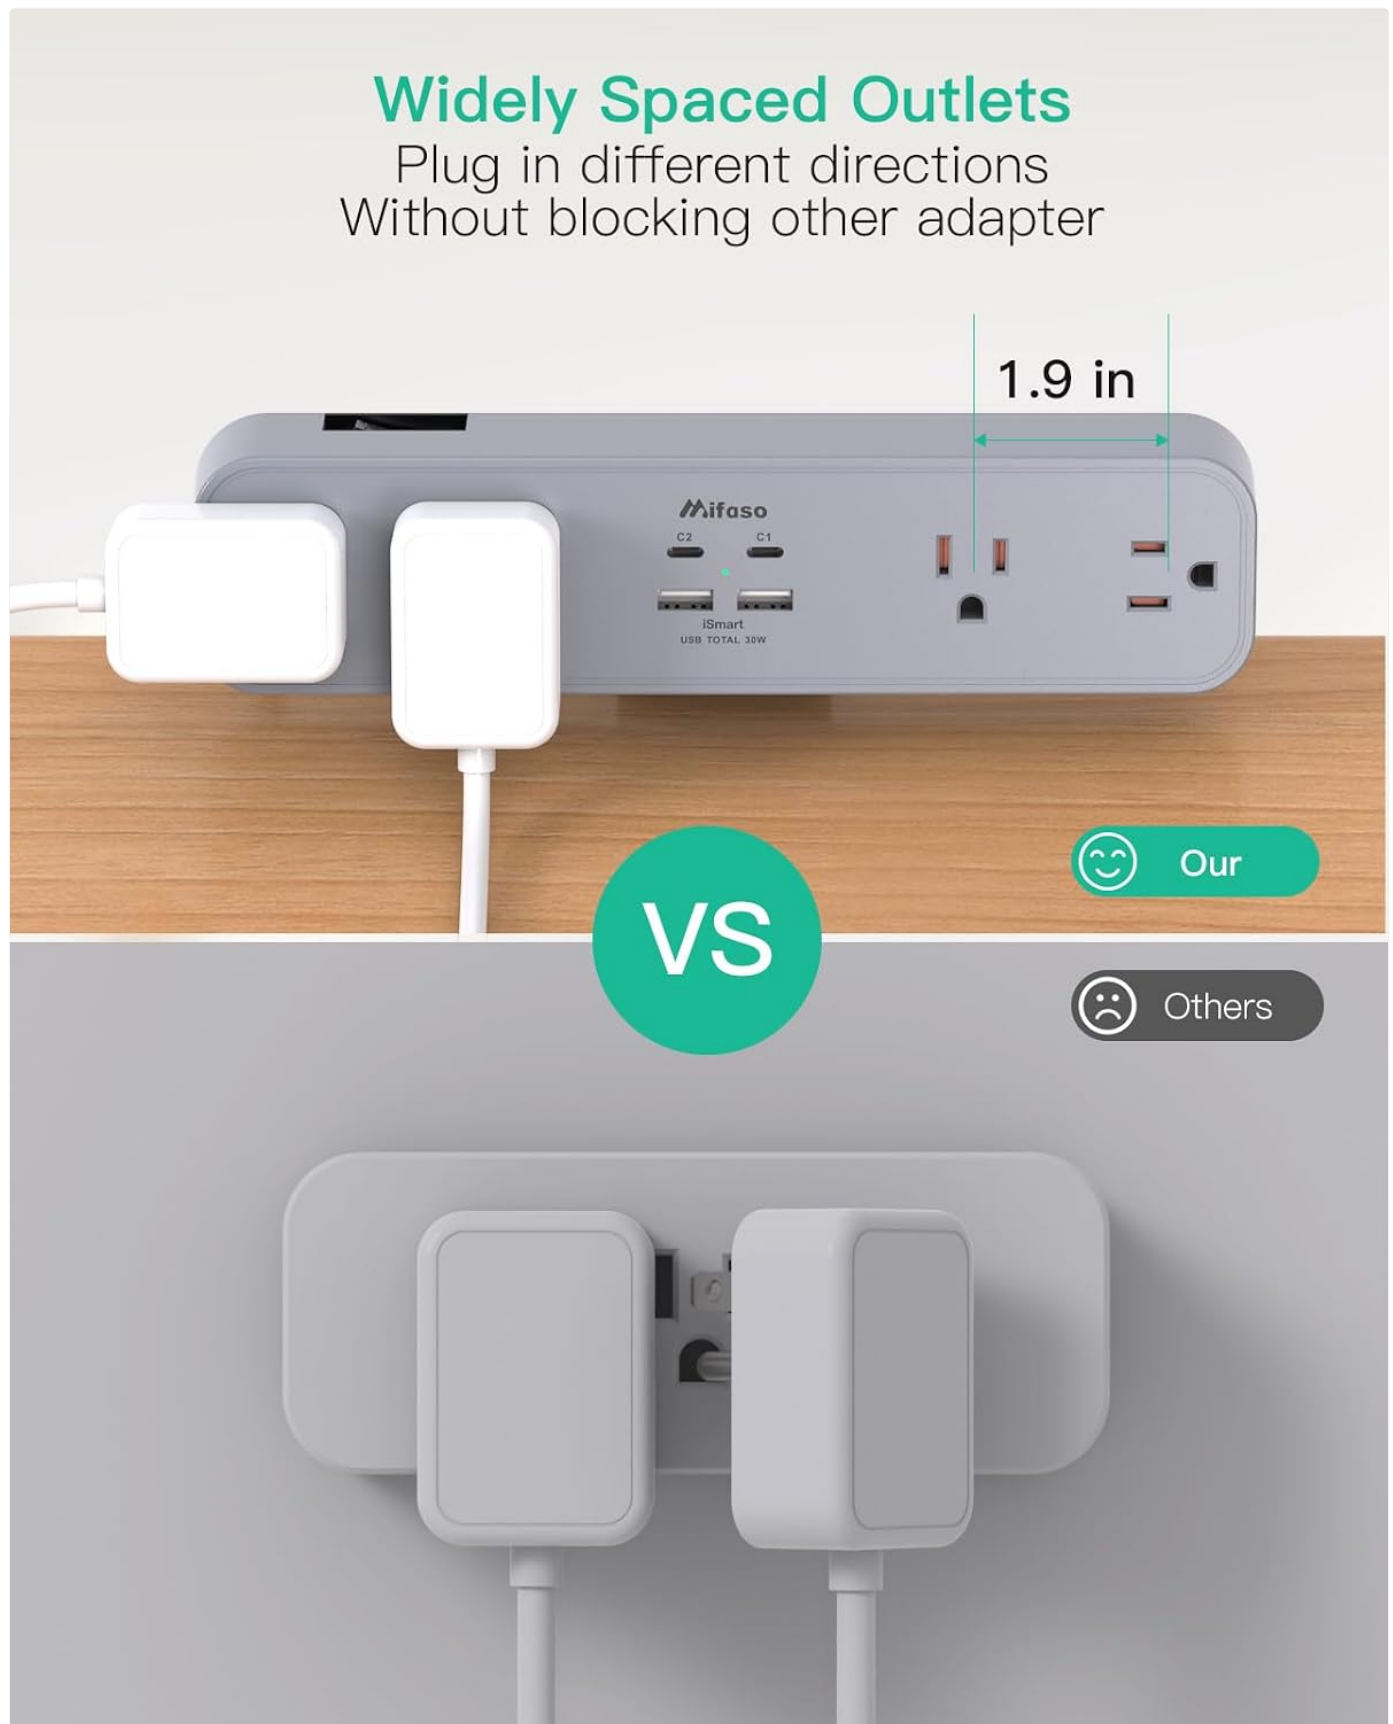


Image: Wide-spaced AC outlets comparison.

2. Using USB Charging Ports

The power strip includes 2 USB-A ports and 1 USB-C port for charging mobile devices. The USB-C port supports 30W Power

Delivery (PD) for fast charging compatible devices.

- **USB-C Port (C1):** Provides up to 30W PD when used alone, capable of fast-charging smartphones, tablets, and some laptops.
- **USB-A Ports (A1, A2) & USB-C Port (C2):** These ports provide standard charging speeds.
- **Multi-Port Use:** When multiple USB ports are in use, the total output is shared. The C1 port will deliver up to 18W, and the remaining ports (C2, A1, A2) will share 12W.

30W Fast Charging USB C Ports



Charging up to 50% Faster

PD 30W

50%

Original Charger

10%

Note: Only when using one USB C Port, can up to PD 30W

Single Mode		Multiport mode	
C1 PD30W	5V/3A	C1 18W	5V/3A
	9V/3A		9V/2A
	12V/2.5A		12V/1.5A
	15V/2A	+	C2/A1/A2 12W
	20V/1.5A		
C2/A1/A2 12W		5V/2.4A Max	

USB OUTPUT
TOTAL
30W



Image: USB-C PD charging details and power distribution.

3. Power Switch and Surge Protection

The integrated power switch controls all connected outlets and USB ports. It also functions as a circuit breaker for surge protection. In case of an overload or power surge, the switch will automatically trip to protect your devices. To reset, unplug some devices and press the switch back to the 'ON' position.



Image: Surge protection and reset switch.

MAINTENANCE

To ensure optimal performance and longevity of your power strip, follow these maintenance guidelines:

- **Cleaning:** Disconnect the power strip from the wall outlet before cleaning. Use a dry, soft cloth to wipe the exterior. Do not use

liquid cleaners or abrasive materials.

- **Inspection:** Periodically inspect the power cord and the unit for any signs of damage, such as frayed wires or cracks. If damage is found, discontinue use immediately and contact customer support.
- **Environment:** Keep the power strip in a dry environment, away from moisture, excessive heat, and direct sunlight.

TROUBLESHOOTING

If you encounter issues with your Mifaso PD30W Desk Clamp Power Strip, refer to the following common solutions:

Problem	Possible Cause	Solution
No power to outlets/USB ports	Power switch is off Overload protection tripped Wall outlet issue	Ensure power switch is ON. Reduce connected devices, then press reset switch. Test wall outlet with another device.
Slow charging via USB-C PD	Multiple USB ports in use Device not PD compatible Faulty cable	Use USB-C1 port alone for maximum 30W output. Ensure your device supports USB Power Delivery. Try a different USB-C cable.
Power strip not clamping securely	Desk thickness outside range Clamp not tightened enough	Verify desk thickness is between 0.5 and 1.96 inches. Tighten the clamp screw firmly.

SPECIFICATIONS

Brand	Mifaso
Model	PD30W
AC Outlets	4
USB-A Ports	2
USB-C Ports	1 (30W Power Delivery)
Total USB Ports	3
Surge Protection Rating	1080 Joules
Voltage	125V
Plug Type	Type A
Cord Length	5 feet (1.5 meters)
Clamp Thickness Range	0.5 - 1.96 inches (1.27 - 5 cm)
Color	Gray

WARRANTY INFORMATION

The Mifaso PD30W Desk Clamp Power Strip comes with a **1-Year Limited Warranty** from the date of purchase. This warranty covers manufacturing defects and malfunctions under normal use. It does not cover damage caused by misuse, accidents,

unauthorized modifications, or external causes such as power surges not protected by the device's surge protection. Please retain your proof of purchase for warranty claims.

CUSTOMER SUPPORT

For technical assistance, warranty claims, or any questions regarding your Mifaso PD30W Desk Clamp Power Strip, please contact Mifaso customer service. You can typically find contact information on the official Mifaso website or through the retailer where you purchased the product.

You may also visit the [Mifaso Store on Amazon](#) for additional product information and support resources.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question