

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [DELTA](#) /

› [Delta Woodhurst Bathroom Faucet Instruction Manual](#)

DELTA 3532LF-SSMPU

Delta Woodhurst Bathroom Faucet Instruction Manual

Model: 3532LF-SSMPU

Brand: DELTA

INTRODUCTION

This instruction manual provides detailed information for the installation, operation, and maintenance of your Delta Woodhurst Brushed Nickel Bathroom Faucet. Please read this manual thoroughly before beginning installation or use to ensure proper function and longevity of your product.

The Delta Woodhurst Bath Collection offers a refined style with button-cap detailing. This faucet is designed for widespread bathroom sink installations and includes a metal push-pop drain assembly. Delta WaterSense labeled faucets are designed to use at least 20% less water than the industry standard while maintaining performance.



Image: Delta Woodhurst Brushed Nickel Bathroom Faucet, showing the main faucet body with a curved spout and two lever handles, all in a brushed stainless finish.

SETUP AND INSTALLATION

The Delta Woodhurst faucet is designed for easy DIY installation, fitting 3-hole, 4-16 inch widespread installations. Follow these steps for a secure and leak-free setup.

Pre-Installation Considerations

- Ensure your sink has 3 holes for widespread installation.
- Verify the hole size is between 1.13-1.5 inches.
- Confirm maximum deck thickness is 1.19 inches.
- Water supply connection is 0.5 inches.
- Minimum clearance to backsplash required is 1.19 inches.




Image: Diagram illustrating the dimensions and hole requirements for the Delta Woodhurst faucet, including spout height (6 inches), spout reach (5.25 inches), and widespread width range (4.5-16 inches).

Installation Steps


- Feed Supply Lines:** Feed supply lines through base gaskets, then through the outside holes of the sink.
- Feed Spout Inlet:** Feed the spout inlet through its base gasket, then through the center hole.
- Secure Bracket:** Secure the mounting bracket to the mounting stud using the included wrench with the pre-installed nut.
- Connect Spout Inlet:** Connect the spout inlet to the valve outlets using the supplied hose.
- Connect Supply Lines:** Connect the hot and cold supply stops (not included) and tighten with an adjustable wrench.
- Remove Aerator:** Remove the aerator with the included wrench, run water for 30 seconds to flush the system, then reinstall the aerator.
- Install Drain:** Uninstall any existing drain, then install the new metal push-pop drain assembly. Ensure it is properly sealed to prevent leaks.

THOUGHTFULLY DESIGNED FOR AN EASIER INSTALL


1 Feed supply lines through base gaskets then the outside holes




2 Feed spout inlet through base gasket then the center hole



3 Secure bracket to mounting stud using included wrench with pre-installed nut

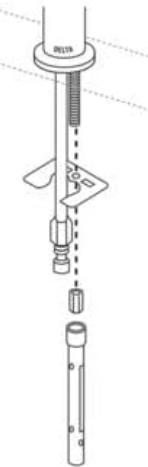

4 Connect spout inlet to valve outlets with supplied hose




5 Connect supply lines (not included) to hot and cold supply stops and tighten with adjustable wrench



6 Remove aerator with included wrench, run water for 30 seconds then reinstall aerator



7 Uninstall existing drain, install new and check for leaks (see Delta Faucet's YouTube channel for drain type)



WE'RE HERE AND READY TO HELP

Explore Delta Faucet's YouTube channel for step-by-step installation videos or contact our dedicated customer care team at

1-800-345-3358

Image: Visual guide showing seven steps for installing the Delta Woodhurst widespread bathroom faucet, from feeding supply lines to installing the drain.

Quick-Connect System

The faucet features a wrench-free, quick-connect hose system. The hose audibly clicks when water lines are connected

properly, ensuring a secure connection and helping to prevent leaks.



DELTA

A SIMPLIFIED INSTALLATION

QUICK-CONNECT SYSTEM

Wrench-free, quick-connect
hose audibly clicks when water
lines are connected properly

Quick-connect appearance may vary slightly but will function the same

Image: A hand demonstrating the quick-connect system for the faucet's water lines, showing the audible click mechanism for secure installation.

OPERATION

The Delta Woodhurst faucet features two lever handles for controlling water flow and temperature. The metal push-pop drain assembly allows for easy opening and closing of the drain.

- **Water Flow:** Turn the handles to adjust the water flow.
- **Temperature Control:** Rotate the left handle for hot water and the right handle for cold water. Adjust both handles to achieve desired water temperature.
- **Drain Operation:** Press the top of the metal pop-up drain to close it and retain water in the sink. Press again to open the drain and allow water to flow out.



Image: The Delta Woodhurst faucet installed on a bathroom vanity, with water flowing from the spout into the sink, demonstrating typical operation.

MAINTENANCE

Proper care and maintenance will ensure the longevity and performance of your Delta Woodhurst faucet.

Cleaning and Finish Care

The Brilliance finishes are engineered for durability and tested for corrosion resistance, exceeding industry standards. They are also scratch-resistant and tested against over 100 household cleaners.

- Clean the faucet regularly with a soft, damp cloth.
- Avoid abrasive cleaners, harsh chemicals, or scouring pads, as these can damage the finish.
- For stubborn spots, use a mild soap and water solution, then rinse thoroughly and dry.

CORROSION RESISTANT

BRILLIANCE® STAINLESS FINISH

TESTED
TO AT LEAST
2X
INDUSTRY STANDARD*

Withstands a corrosive salt
solution for over 8 hours,
double the required industry
standard, without blistering,
cracking or peeling



*Industry standard is based on ASTM B368-21 at 4 hours of exposure

 **DELTA**

Image: A close-up of the Delta Woodhurst faucet with text highlighting its corrosion-resistant Brilliance Stainless Finish, tested to at least 2 times industry standard.



SCRATCH-RESISTANT HIGH PERFORMANCE FINISH

DELTA® BRILLIANCE® FINISHES

are tested against more than 100 household cleaners and undergo extreme abrasion testing to ensure a scratch-resistant surface



PROVEN RESULTS

Scratch-free Brilliance®
Stainless after passing 2,000
cycles of abrasion testing

*Brushed finish shown in extreme close-up



TESTED & CERTIFIED

All Delta finishes are third-party certified and vigorously tested to ensure years of dependable use without cracking, peeling, chipping, blistering or changing color over time.



CORROSION RESISTANCE



ABRASION RESISTANCE



CHEMICAL RESISTANCE



FINISH ADHESION



WATER IMMERSION

Image: A hand cleaning the faucet, emphasizing its scratch-resistant high-performance finish, tested against household cleaners and abrasion.

Drain Cleaning

The metal push-pop drain is designed for easy cleaning.

- The drain assembly unscrews from above the deck, allowing for quick removal.
- Remove the drain to easily clear hair and other debris that may accumulate.
- Reinstall the drain by screwing it back into place, ensuring a tight seal.

Valve Reliability

The valve cartridge is tested to last at least 500,000 uses, ensuring high performance with minimal drips and smooth handle operation.

BUILT TO LAST

BY
PLUMBING EXPERTS

 DELTA

RELIABLE VALVE

Tested to last at least 500,000 uses for reliable, long-lasting performance

CORROSION RESISTANT

Long metal mounting shanks resist corrosion and accommodate a larger deck thickness

SECURE INSTALLATION

Jack screws lock handle base tightly into place to prevent shifting

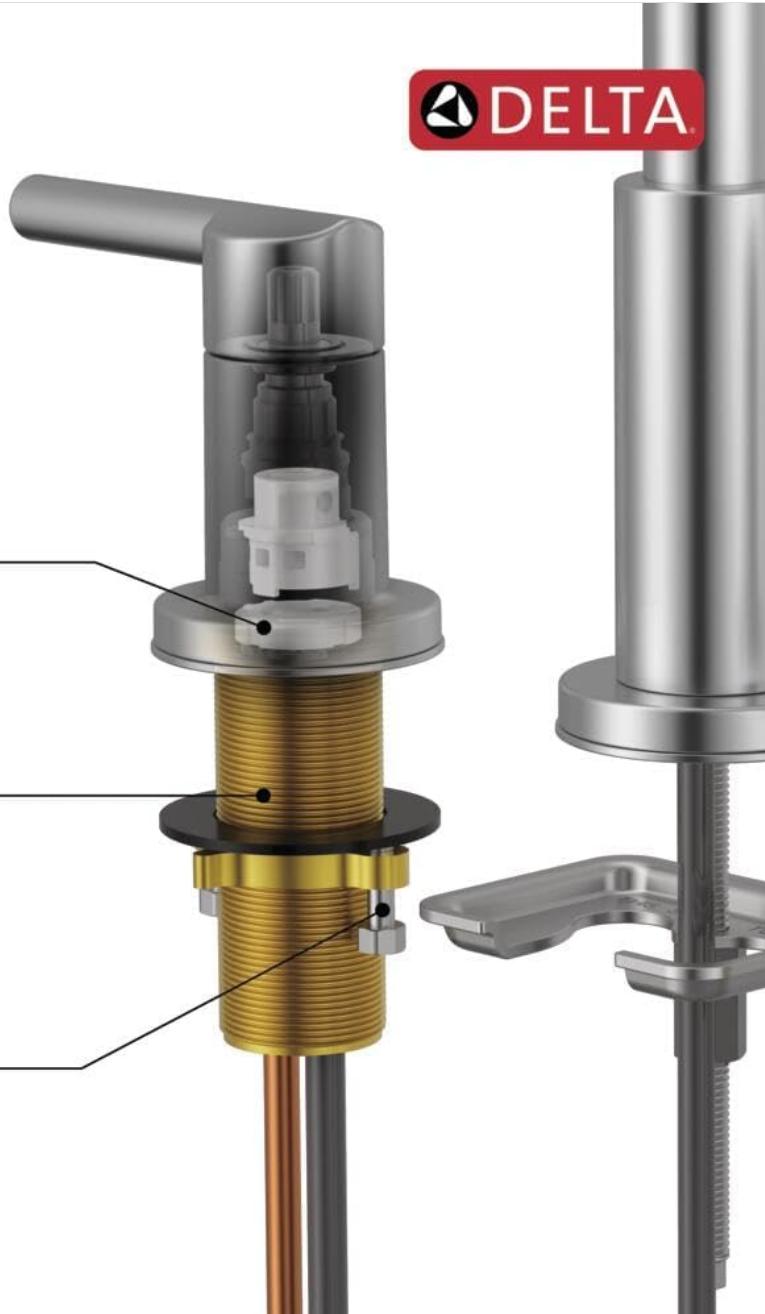


Image: An exploded view diagram of the faucet's internal components, highlighting the reliable valve, corrosion-resistant mounting shanks, and secure installation features.

TROUBLESHOOTING

This section addresses common issues you might encounter with your Delta Woodhurst faucet.

Problem	Possible Cause	Solution
Low Water Flow	Clogged aerator or debris in supply lines.	Remove and clean the aerator. Flush supply lines by running water without the aerator for 30 seconds.
Leaking from Faucet Base	Loose connections or damaged gaskets.	Check all connections under the sink for tightness. Ensure gaskets are properly seated and not damaged.

Problem	Possible Cause	Solution
Drain Not Sealing Properly	Debris in drain, improper installation of drain assembly.	Remove the push-pop drain assembly and clear any debris. Reinstall, ensuring it is screwed in tightly and sealed correctly.
Handles Stiff or Hard to Turn	Mineral buildup or worn cartridge.	Flush the system. If the issue persists, the valve cartridge may need inspection or replacement. Contact customer support.

PRODUCT SPECIFICATIONS

Feature	Detail
Brand	DELTA
Model Name	Woodhurst™
Model Number	3532LF-SSMPU
Color	Stainless (Brushed Finish)
Material	Stainless Steel (Faucet), Metal (Handles)
Mounting Type	Deck Mount
Hole Count	3
Number of Handles	2
Special Feature	Pop Up Drain
Maximum Flow Rate	1.2 Gallons Per Minute (WaterSense Certified)
Product Dimensions	2"D x 6"W x 6.81"H
Item Weight	4.62 pounds
Spout Height	6 Inches
Spout Reach	5.25 Inches
Included Components	Instruction Manual, Metal Push-Pop Drain Assembly



Image: The WaterSense logo, indicating the product meets EPA criteria for water efficiency.

WARRANTY AND SUPPORT

Lifetime Limited Warranty

Delta bathroom faucets are backed by Delta Faucet's Lifetime Limited Warranty. This warranty covers defects in material and workmanship for as long as the original consumer purchaser owns the home in which the faucet was first installed. For full warranty details, please refer to the official Delta Faucet website or contact customer support.

Customer Support

For assistance with installation, troubleshooting, or warranty claims, please contact Delta Faucet customer support.

Phone: 1-800-345-3358

Online Resources: Explore Delta Faucet's YouTube channel for step-by-step installation videos and other helpful guides.




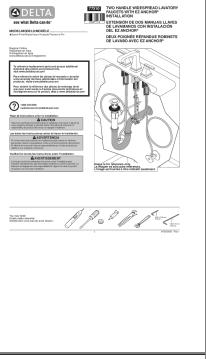




Image: A Delta Faucet customer service representative, highlighting the availability of support via phone.

IMPORTANT NOTES

This product may expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Related Documents - 3532LF-SSMPU


	<p>Delta Woodhurst 3532LF-AMPU Two Handle Widespread Bathroom Faucet Installation Guide</p> <p>Comprehensive installation guide for the Delta Woodhurst 3532LF-AMPU two-handle widespread bathroom faucet, including step-by-step instructions, maintenance tips, and warranty information.</p>
	<p>Delta Faucet Installation and Maintenance Guide: Two Handle Widespread Lavatory Faucets (Models 3560 & 3565)</p> <p>A comprehensive guide for installing and maintaining Delta's Two Handle Widespread Lavatory Faucets, models 3560 and 3565. This document provides detailed instructions for installation, cleaning, warranty information, and maintenance, with textual descriptions replacing diagrams.</p>
	<p>Delta Archdale 35798LF Faucet Parts Diagram and Identification</p> <p>Detailed parts list and identification for the Delta Archdale 35798LF widespread bathroom faucet. Includes part numbers, descriptions, and assembly components for easy reference.</p>
	<p>Delta 77310 Two Handle Widespread Lavatory Faucet with EZ Anchor Installation Guide</p> <p>This document provides comprehensive installation instructions for the Delta 77310 Two Handle Widespread Lavatory Faucet with EZ Anchor technology. It includes detailed steps, cleaning and care advice, troubleshooting tips, and warranty information.</p>
	<p>Delta Two Handle Widespread Bathroom Faucets Installation and Care Guide</p> <p>Comprehensive guide for installing and caring for Delta two-handle widespread bathroom faucets. Includes step-by-step instructions, troubleshooting tips, and warranty information.</p>



[Delta Two Handle Widespread Bathroom Faucets Installation Manual](#)

Detailed installation guide for Delta Two Handle Widespread Bathroom Faucets, covering end valve and handle installation, spout and lift rod setup, supply line connections, pop-up drain assembly, and maintenance tips. Includes step-by-step instructions and troubleshooting advice.

Documents - DELTA – 3532LF-SSMPU

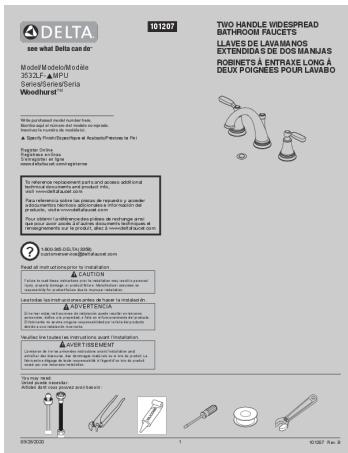

[Delta Woodhurst 3532LF-AMPU Two Handle Widespread Bathroom Faucet Installation Guide](#)

Comprehensive installation guide for the Delta Woodhurst 3532LF-AMPU two-handle widespread bathroom faucet, including step-by-step instructions, maintenance tips, and warranty information.

lang:es score:32 filesize: 3.62 M page_count: 6 document date: 2020-07-02



[\[pdf\] Accessories Catalog](#)

DL 2063 Delta Full Line Catalog 1XA Page s3532LF MPU American Pipe and SupplyDeltaFaucet 01483 120 121 CATimages tradeservice ATTACHMENTS DIR100297 DeltaFaucet CAT |||

WOODHURST BATH 3532LF-SSMPU Shown in Brilliance Stainless The products on opposite page are shown in Chrome. Other coordinating accessories can be found on pages 128131. CH RB SS 120 D E LTA B R A N D CH CHROME RB VENETIAN BRONZE SS BRILLIANCE STAINLESS WOODHURST BATH 4 Cente...

lang:en score:24 filesize: 254.06 K page_count: 2 document date: 2020-10-05

WOODHURST BATH




[\[pdf\]](#) Accessories Catalog

DL 2063 Delta Full Line Catalog 1XA WOODHURST® BATH Cloudinary 2 giorni fa — The products on opposite page are shown in Chrome Other coordinating accessories can be found pages 128 131 CH CHROME DeltaFaucet 01483 120 121 CAT res cloudinary dzhpkjoqj TradeService |||

WOODHURST BATH 3532LF-SSMPU Shown in Brilliance Stainless The products on opposite page are shown in Chrome. Other coordinating accessories can be found on pages 128131. CH RB SS 120 D E LTA B R A N D CH CHROME RB VENETIAN BRONZE SS BRILLIANCE STAINLESS WOODHURST BATH 4 Cente...

lang:en score:23 filesize: 254.05 K page_count: 2 document date: 2020-10-05

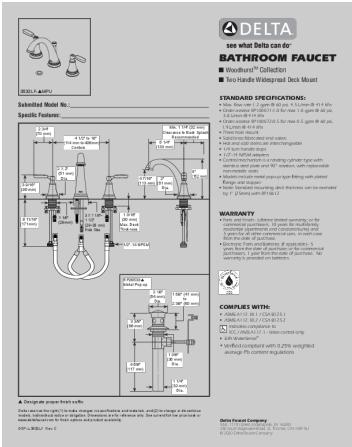


[\[pdf\]](#) Specifications Warranty Catalog

Woodhurst 8 in Widespread 2 Handle Bathroom Faucet Stainless Specification Delta 3532LF SSMPU 034449871471 0034449871471 1007184994 5723da7c 7e7e 423f a962 1552d8e1d345 images thdstatic catalog Images 57 |||

3532LF-MPU Submitted Model No.: Specific Features: 2 3/4 70 mm 4 1/2 to 16 114 mm to 406mm Centers 3 9/16 90 mm 2 X 2 51 mm Dia BATHROOM FAUCET WoodhurstTM Collection Two Handle Widespread Deck Mount Min. 1 1/4 32 mm Clearance to Back Splash Recommended 5 1/4 133 mm 4 7/1...

lang:en score:20 filesize: 516.83 K page_count: 1 document date: 2020-08-24

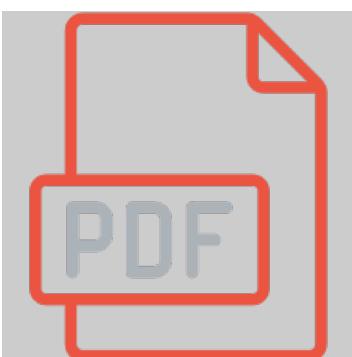

[\[pdf\]](#)

101207 TWO HANDLE WIDESPREAD BATHROOM FAUCETS LLAVES DE Rev B media deltafaucet Mandl View Maintenance Installation Sheet Bathroom Faucet in Stainless 3532LF SSMPU Delta |||

...

lang:en score:17 filesize: 1 M page_count: 0 document date: 0000-00-00

[\[pdf\]](#) Decleration of Conformity Accessories Catalog

DL 2007 2018 Mini Cover FINAL indd DELTA® 76446 BL Thos Somerville Co DELTA RP64859BL

Catalog assets unilogcorp 2 ITEM DOC |||

2018 KITCHEN BATH TABLE OF CONTENTS KITCHEN 10 Touch2O Technology 12

Pull-Downs/Pull-Outs ... not shown Finishes: CH, OB, SS D E LTA B R A N D 71

NEW WOODHURSTM BATH AVAILABLE Q4 2018 **3532LF-SSMPU** Shown in

Brilliance Stainless 72 D E LTA B R A N D The products on opposite page are ...

lang:en **score:17** filesize: 10.39 M page_count: 102 document date: 2018-06-26

