

ANJIELO SMART 64008F-B+67024C-B

ANJIELO SMART 4-Wire Video Door Intercom System User Manual

Model: 64008F-B+67024C-B

1. INTRODUCTION

This manual provides detailed instructions for the installation, operation, and maintenance of your ANJIELO SMART 4-Wire Video Door Intercom System. Please read this manual thoroughly before installation and use to ensure proper function and safety. Keep this manual for future reference.

2. PRODUCT OVERVIEW

The ANJIELO SMART 4-Wire Video Door Intercom System offers enhanced security and convenience for your home. It features a 7-inch WiFi-enabled monitor and a 1080p outdoor doorbell camera. Key functionalities include two-way audio communication, remote monitoring via the Tuya app, night vision, and multiple unlocking methods.

Key Features:

- **Two-Way Audio:** Communicate with visitors at your door from the indoor monitor or your smartphone.
- **7-Inch Touch Monitor:** High-resolution display with touch controls and hands-free function.
- **1080p Doorbell Camera:** Features a 120° wide-angle lens, built-in infrared sensor for night vision, and an IP65 waterproof and dustproof rating.
- **Tuya WiFi Smart Home Compatible:** Seamless integration with the Tuya app for remote monitoring and control.
- **3-in-1 Unlock Methods:** Unlock your door using an IC card, the Tuya app, or directly from the indoor monitor.
- **Expandable System:** Supports up to 1 outdoor unit and 4 indoor monitors, allowing internal communication between monitors.

4-wire video doorbell intercom system

Two-way audio/Real-time monitoring/Infrared night vision



Tuya Smart



Smart Life



Image: Overview of the ANJIELO SMART 4-Wire Video Door Intercom System, highlighting its main components and smart home integration.

3. WHAT'S IN THE BOX

Carefully unpack the box and ensure all items are present and in good condition. If any items are missing or damaged, please contact customer support.

- Outdoor Doorbell Unit
- 7-inch Indoor Monitor
- Power Adapter (15V 1.2A)
- Instruction Manual
- Unlock Cable
- 4-Pin Cable
- Screws and Rubber Plugs for mounting
- Hanging Plate for monitor
- IC Cards (7 included)


Product List




Outdoor Doorbell



Unlock cable

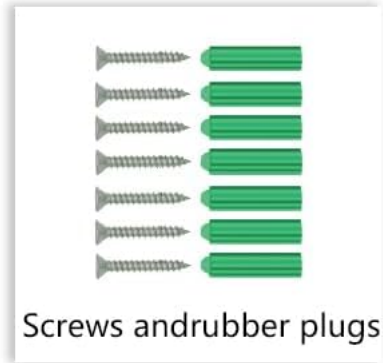

Screws and rubber plugs

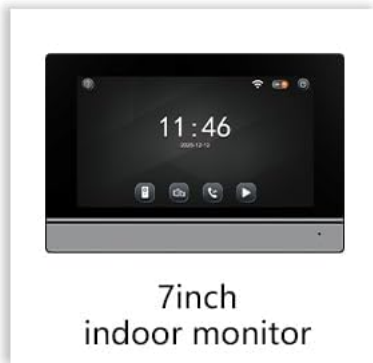

7inch indoor monitor




Hanging plate




card*7



15V 1.2A power supply

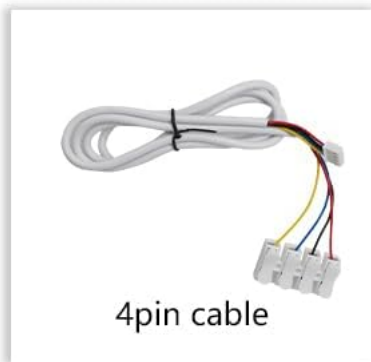

4pin cable

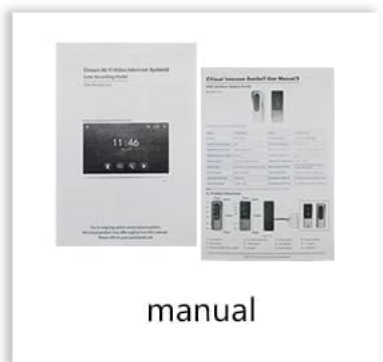

manual

Image: All components included in the product package, such as the outdoor doorbell, indoor monitor, cables, power supply, mounting hardware, and IC cards.

4. SETUP AND INSTALLATION

The system uses a 4-wire connection for communication between the outdoor doorbell and the indoor monitor. Ensure power is disconnected before beginning installation.

4.1 Mounting the Outdoor Doorbell

1. Choose a suitable location near your entrance, approximately 1.5 meters (5 feet) from the ground, avoiding direct sunlight or rain exposure (though the unit is IP65 rated).
2. Use the provided screws and rubber plugs to securely mount the doorbell unit.

3. Ensure the camera has a clear, unobstructed view of the entrance.

Playback of surveillance footage

24-hour real-time monitoring



Image: The outdoor doorbell camera providing a 120-degree ultra-wide-angle view of the entrance area.

4.2 Mounting the Indoor Monitor

1. Select a convenient indoor location for the monitor, such as a wall in your living room or kitchen.
2. Attach the hanging plate to the wall using screws.
3. Connect the wiring to the monitor as per the wiring diagram (refer to the included instruction manual for detailed diagram).
4. Mount the monitor onto the hanging plate.

4.3 Wiring Connections

Connect the outdoor doorbell unit to the indoor monitor using the provided 4-pin cable. Ensure correct polarity and secure connections. If connecting an electronic lock, use the unlock cable and refer to the detailed wiring diagram in the included manual.

4.4 Power Connection

Connect the 15V 1.2A power adapter to the indoor monitor and plug it into a standard power outlet. The system will power on automatically.

4.5 Tuya App Setup

1. Download the Tuya Smart or Smart Life app from your smartphone's app store.
2. Register or log in to your account.
3. Follow the in-app instructions to add your ANJIELO SMART monitor to the app. This typically involves putting the monitor into pairing mode and connecting it to your home WiFi network.

5. OPERATING INSTRUCTIONS

5.1 Answering a Call

When a visitor presses the doorbell button, the indoor monitor(s) will ring, and a live video feed from the outdoor camera will appear. Your smartphone (if connected via Tuya app) will also receive a notification.

- **From Monitor:** Tap the 'Answer' icon on the screen to initiate two-way audio communication.
- **From Smartphone:** Open the Tuya app and tap the notification to view the live feed and communicate.

Two-way video intercom

When the doorbell rings, you can see the visitor through the indoor unit and also communicate with them via intercom



Image: Illustration of the two-way video intercom function, demonstrating communication between a visitor at the doorbell and a resident using the indoor monitor.

5.2 Unlocking the Door

You have three methods to unlock a connected electronic lock:

- **Via Indoor Monitor:** During a call or while viewing the live feed, tap the 'Unlock' icon on the monitor screen.
- **Via Tuya App:** From the live view in the app, tap the 'Unlock' button.
- **Via IC Card:** Present a pre-programmed IC card to the card reader on the outdoor doorbell unit.

5.3 Remote Monitoring

Using the Tuya app on your smartphone, you can view the live feed from the outdoor doorbell camera anytime, anywhere, as long as your monitor is connected to WiFi and your phone has internet access.

There is no limit to the number of users who can connect to the Tuya app, and the number of users who can simultaneously monitor and view the feed is 5



Remote Viewing Two-way Audio



On work



Take a walk



shopping



go out

Image: Users accessing the video intercom system remotely via their smartphones, enabling two-way audio and viewing from different locations.

5.4 Surveillance Footage Playback

The system supports 24-hour real-time monitoring and recording. You can review recorded video clips directly from the indoor monitor or through the Tuya app.



View replays of your recorded video clips anytime, anywhere



Image: The indoor monitor screen showing a timeline for playback of recorded surveillance footage, demonstrating 24-hour monitoring.

5.5 Internal Communication (Multi-Monitor Systems)

If you have multiple indoor monitors, they can communicate with each other (audio only). Refer to the detailed instructions in the included manual for initiating internal calls.

Supports a maximum of 1 outdoor unit + 4 indoor units

Indoor units can communicate with each other



Image: A diagram illustrating the system's capability to support one outdoor unit and up to four indoor units, with internal communication between monitors.

6. MAINTENANCE

Regular maintenance ensures the longevity and optimal performance of your intercom system.

- **Cleaning:** Use a soft, damp cloth to clean the outdoor doorbell camera lens and the indoor monitor screen. Avoid abrasive cleaners or solvents.
- **Connection Check:** Periodically inspect all wiring connections to ensure they are secure and free from corrosion.
- **Software Updates:** Keep the Tuya app updated to the latest version. Check the app or manufacturer's website for any firmware updates for the monitor or doorbell.
- **Environmental Protection:** While the outdoor unit is IP65 rated, extreme weather conditions can still affect performance. Ensure proper installation to minimize exposure to harsh elements.

Protection rating: IP65

Operating temperature: -30°C to +60°C



Image: The outdoor doorbell unit, showcasing its IP65 protection rating, indicating resistance to dust and water.

7. TROUBLESHOOTING

If you encounter issues with your system, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
No video on monitor/app	Loose wiring, power issue, camera malfunction.	Check all 4-wire connections. Ensure power adapter is plugged in. Restart the system.
No audio during call	Microphone/speaker issue, wiring problem.	Verify wiring. Check monitor volume settings.
Cannot unlock door	Electronic lock not connected, wiring issue, IC card not programmed.	Ensure electronic lock is properly wired. Program IC cards as per manual.

Problem	Possible Cause	Solution
WiFi connection unstable	Weak WiFi signal, incorrect password, router issue.	Ensure monitor is within WiFi range. Re-enter WiFi password. Restart router.
Night vision not working	Infrared sensor blocked or faulty.	Clean the camera lens. Ensure no obstructions.

If the problem persists after attempting these solutions, please contact ANJIELO SMART customer support.

8. SPECIFICATIONS

Feature	Detail
Brand	ANJIELO SMART
Model Number	64008F-B+67024C-B
Power Source	Corded Electric (15V 1.2A)
Connectivity Technology	Wired (4-wire), WiFi (for app)
Video Capture Resolution	1080p
Doorbell Camera Angle	120° Wide Angle
Control Method	App, Touch
Compatible Devices	Smartphone (Tuya App)
Maximum Range	100 Meters (wired connection)
Item Dimensions (L x W x H)	5.9 x 1.9 x 8.6 inches (approximate)
Protection Rating (Outdoor Unit)	IP65 Dustproof and Waterproof
Operating Temperature	-30°C to +60°C
Installation Method	Screw-In

9. WARRANTY AND SUPPORT

For warranty information and customer support, please refer to the warranty card included in your product package or visit the official ANJIELO SMART website. You can also contact the seller directly through your purchase platform for assistance.

Manufacturer: ANJIELO SMART

ASIN: B0GL212P4W

