Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

OLIGHT Olight I3T EOS 180 Lumens Dual-Output Sl

OLIGHT I3T EOS Flashlight User Manual

Model: Olight I3T EOS 180 Lumens Dual-Output Sl
Brand: OLIGHT

Product Overview

The OLIGHT I3T EOS is a compact and powerful EDC (Every Day Carry) flashlight designed for various uses including camping and hiking. It features a slim profile and is powered by a single AAA battery, offering dual-output modes for versatile illumination.
Key features include:

- **High Performance:** 180 lumens maximum output with a TIR optic lens for a soft and balanced beam.
- **Smooth Operation:** Tail switch for momentary/constant on and quick mode changing (5/180 lumens).
- **Anti-Slip Design:** Double helix body knurling provides a solid grip.
- **Compact & Lightweight:** Weighs only 1.4 oz, easy to carry with a dual-direction pocket clip.
- **Durability:** IPX8 waterproof rating, designed for use in heavy rain.



Image: The OLIGHT I3T EOS flashlight, showcasing its compact black aluminum body and pocket clip.

Setup

1. **Battery Installation:**

   Unscrew the tail cap of the flashlight. Insert one AAA battery (included) with the positive (+) end facing towards the head of the flashlight. Ensure to remove any protective barrier from the battery if present before insertion.



Image: Package contents including the I3T EOS flashlight, one AAA battery, and user manual.



Image: Exploded view of the flashlight showing its components, including the battery compartment and O-ring for water resistance.

2. **Secure Tail Cap:**

   Screw the tail cap back on tightly to ensure proper electrical contact and maintain the flashlight's water resistance.

Operating Instructions

1. **Power On/Off:**

   Press the tail switch to turn the flashlight on or off.

2. **Mode Switching:**

   The I3T EOS features two brightness modes: 5 lumens (low) and 180 lumens (high).

   - **Momentary On (Low):** Lightly press and hold the tail switch for momentary low output. Release to turn off.
   - **Constant On (Low/High):** Fully press the tail switch to turn on constant low output. Quickly press and release the switch again to cycle to high output.



Image: Illustration of easy operation with soft press for momentary on and deep press for constant on.

3. **Pocket Clip Usage:**

   The dual-direction pocket clip allows for versatile carrying options, such as clipping to a pocket, backpack strap, or the brim of a hat for hands-free use.

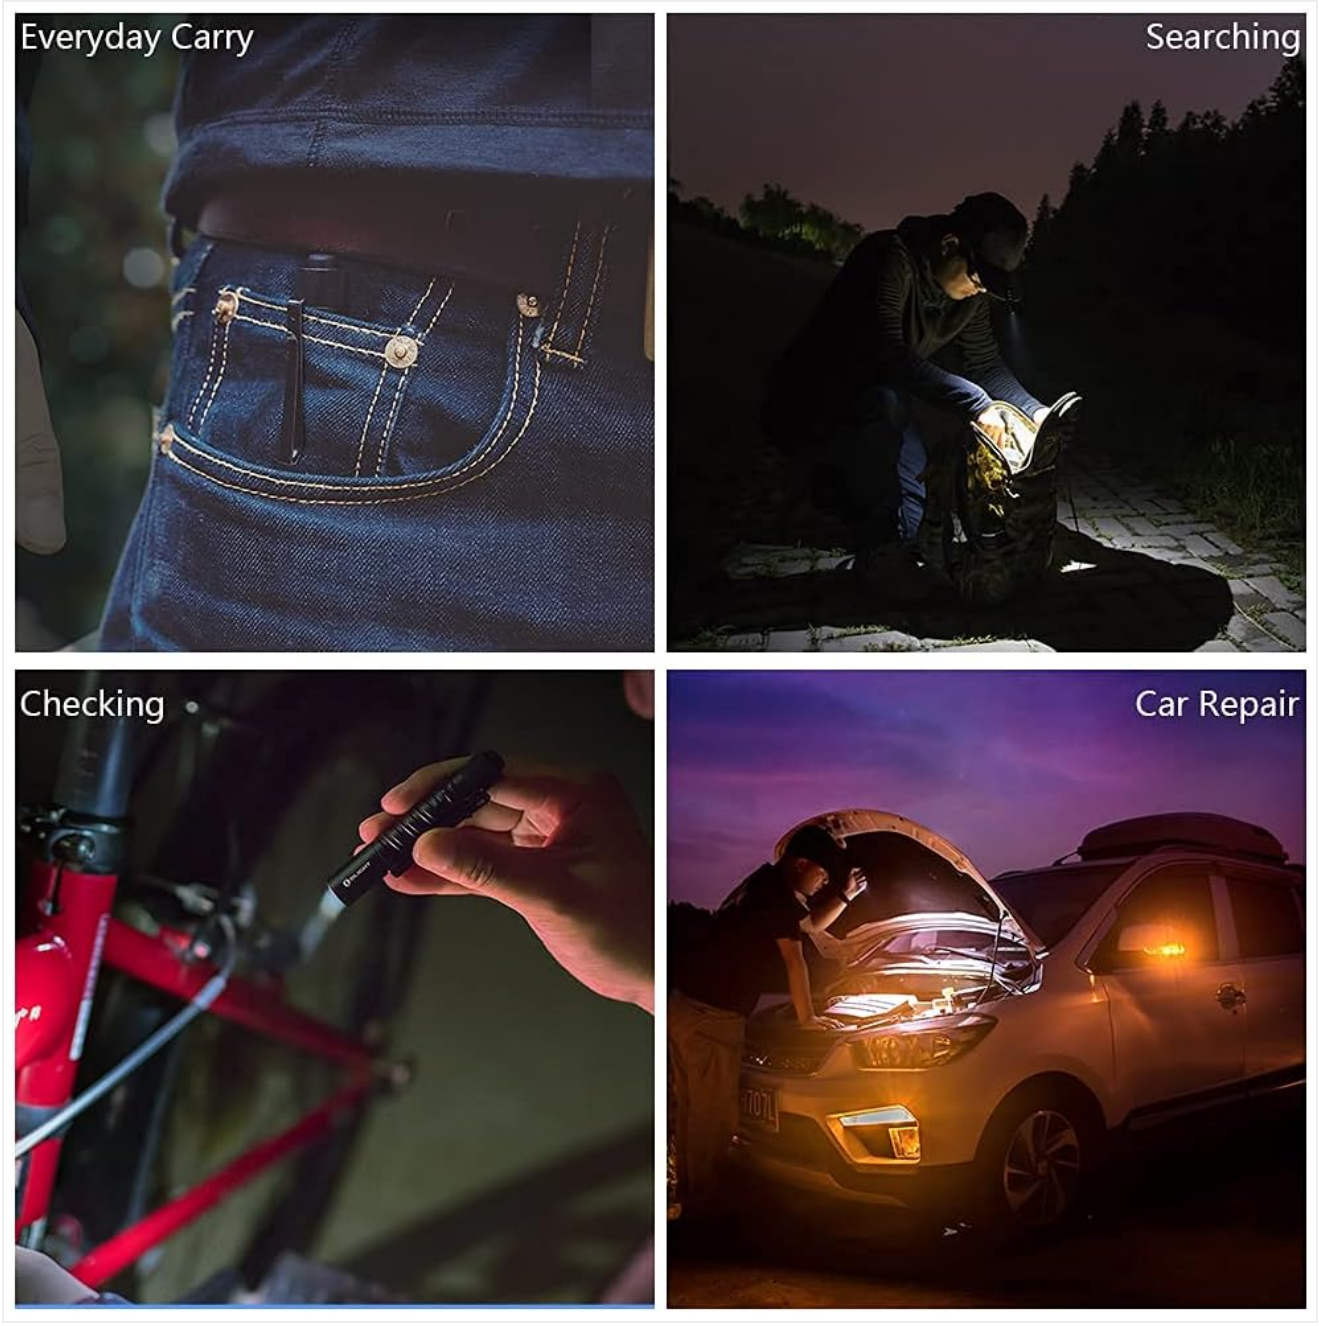


Image: Examples of the flashlight in use for everyday carry, searching, checking, and car repair.

Maintenance

- **Cleaning:**

  Wipe the flashlight with a clean, soft cloth. For stubborn dirt, use a slightly damp cloth. Do not use harsh chemicals or abrasive materials.

- **Battery Replacement:**

  Replace the AAA battery when the light output dims significantly or the flashlight stops functioning. Always use a fresh, high-quality AAA battery.

- **Water Resistance:**

  The flashlight is IPX8 waterproof. Ensure the tail cap is fully tightened to maintain water resistance. Avoid prolonged submersion beyond specified depths or pressures.

- **O-Ring Lubrication:**

  Periodically inspect the O-ring for wear and tear. Lubricate it with silicone grease to maintain water resistance and smooth operation of the tail cap threads.

Troubleshooting

Problem	Possible Cause	Solution
Flashlight does not turn on.	Battery is dead or low. Battery inserted incorrectly. Tail cap is loose. Protective barrier not removed from battery.	Replace with a fresh AAA battery. Ensure battery is inserted with positive (+) end towards the head. Tighten the tail cap securely. Remove the small plastic disc from between the battery and contact point.
Light output is dim or flickers.	Low battery. Dirty contacts.	Replace the battery. Clean battery contacts and flashlight contact points with a clean cloth.

Specifications

Feature	Detail
Brand	OLIGHT
Model	Olight I3T EOS 180 Lumens Dual-Output Sl
Special Feature	Lightweight
Color	Black
Power Source	Battery Powered
Light Source Type	LED
Material	Aluminum
White Brightness	180 Lumens
Included Components	1*User Manual, Battery, I3T EOS
Product Dimensions	0.59"D x 0.59"W x 3.5"H
Voltage	1.5 Volts
Light Path Distance	60 Meters
Battery Cell Composition	Alkaline
Item Weight	1.4 Ounces
Number of Batteries	1 AAA batteries required. (included)
Water Resistance Level	Waterproof (IPX8)
Runtime	16 hours (low mode)
Country of Origin	China

Warranty and Support

Warranty: The OLIGHT I3T EOS comes with a Lifetime warranty for products purchased after January 1st, 2023. For detailed warranty information and support, please refer to the official user manual or contact OLIGHT customer service.

You can also download the full User Manual (PDF)here.

© 2024 OLIGHT. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B07DLRK7Q5

More documents and user manuals: **https://manuals.plus/**