

## Intex 26334GN

# Intex Ultra XTR Round Frame Pool Set

MODEL: 26334GN

## 1. Introduction

This manual provides essential information for the safe and efficient setup, operation, and maintenance of your Intex Ultra XTR Round Frame Pool. Designed for durability and ease of use, this premium pool offers a refreshing experience for your outdoor space. Please read all instructions carefully before assembly and use to ensure proper functioning and safety.



Figure 1.1: Intex Ultra XTR Round Frame Pool (610x122 cm)

## 2. Safety Information

**Important notes:** This type of swimming pool is not suitable for in-ground installation. A prerequisite for pool installation is a properly prepared installation site. It must be completely flat and level. The surface must be extremely stable so that it can withstand the weight of the filled pool regardless of the weather. In addition, provision must be made for easy drainage of spilled pool water without causing damage.

**Please note:** When using the swimming pool, it is necessary to comply with the safety instructions outlined in the operating and maintenance instructions. To avoid drowning and other serious injuries, pay special attention to the unexpected access to the swimming pool for children under 5 years of age. Ensure safe access to the swimming pool and that children are under continuous adult supervision during bathing times.

### 3. Setup

The Intex Ultra XTR Frame Pool is designed for quick and easy assembly. The easiest assembly method requires two people. No additional tools or locking pins are needed for the frame assembly.

#### 3.1 Site Preparation

- Choose a location that is completely flat and level.
- Ensure the surface is extremely stable and can withstand the weight of the filled pool.
- Provide for easy drainage of spilled water to prevent damage.

#### 3.2 Assembly Steps

The approximate assembly time is sixty minutes, excluding base preparation or filling. Follow the detailed instructions provided in the separate assembly guide for step-by-step setup of the frame and liner. The precision-locked frame system allows for quick assembly and disassembly.

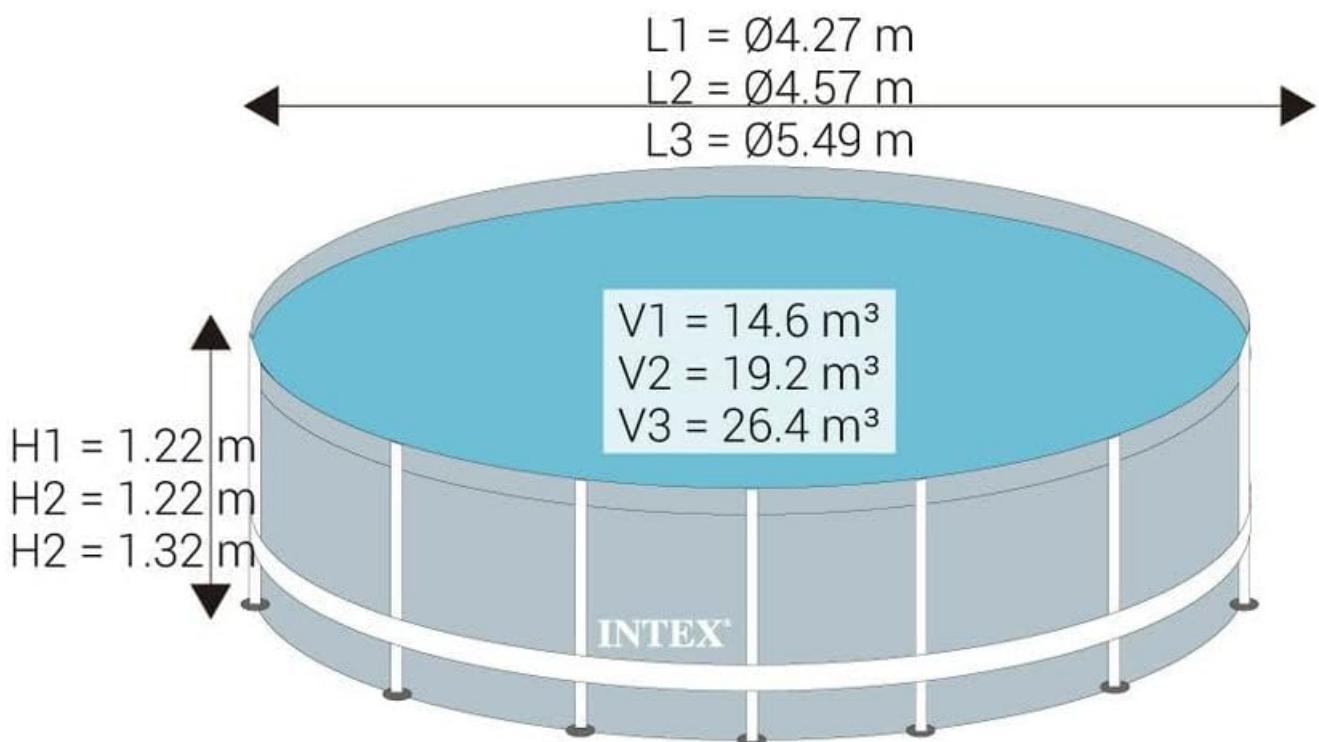


Figure 3.1: Assembly typically takes 45-60 minutes with two adults.

### 4. Operating

Once assembled and filled, your Intex Ultra XTR Frame Pool is ready for use. The pool's water capacity is 30079 liters when filled to 90%.

#### 4.1 Filtration System

The included Intex Krystal Clear sand filter system (SF80220RC-2, 4700 liters/hour GS) ensures optimal water filtration. Connect the filter system according to the provided instructions to maintain clean and clear water. This system includes all necessary connections for proper operation.

#### 4.2 Water Activation Technology

Intex's Water Activation Technology is integrated to improve water circulation, filtration, and purity within your pool, contributing to overall water and air quality. The complete water activation nozzle sets are easy to install and can be adjusted at any time.

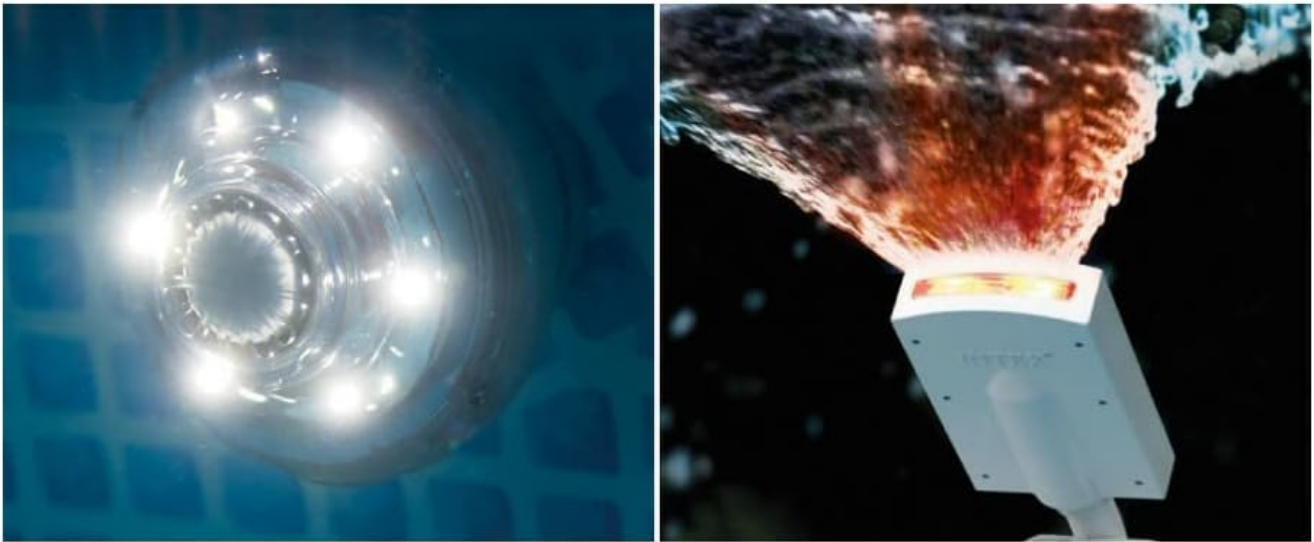


Figure 4.1: Example of an underwater light, enhancing the pool experience.



\*temps de montage par 2 adultes selon le modèle

Figure 4.2: Water jet from the filter system, demonstrating water circulation.

## 5. Maintenance

Regular maintenance is crucial for the longevity and cleanliness of your Intex pool. The reinforced pool liner, with a 0.55mm floor and 0.68mm wall, is designed for high stability and durability, but proper care is still essential.

### 5.1 Pool Cover and Ground Protection

The included tarpaulin (pool cover) and ground protection tarpaulin provide additional protection against debris and reduce contamination in the pool. Always use the pool cover when the pool is not in use.

### 5.2 Water Quality

Regularly check and adjust water chemistry (pH, chlorine levels) to ensure safe and clean swimming conditions. Refer to your filter system manual for specific maintenance procedures.

## 6. Troubleshooting

For common issues such as cloudy water, leaks, or filter problems, please refer to the detailed troubleshooting section in your filter system manual or contact Intex customer support. No specific troubleshooting steps are provided in this general product description.

## 7. Specifications

Feature	Detail
Product Dimensions	90 x 45 x 120 cm; 119.1 kg
Model Number	26334GN
Assembled Height	122 cm
Assembled Width	610 cm
Assembled Weight	117 kg
Material Type	Polyvinyl Chloride (PVC)
Capacity	30079 Liters (at 90% fill)
Shape	Round
Color	Grey
Included Components	Pool cover, Ground cloth, Ladder
Assembly Required	Yes
Water Depth	107 cm
Liner Thickness (Base)	0.55 mm
Liner Thickness (Wall)	0.68 mm



Figure 7.1: Diagram showing pool dimensions and capacities for different sizes.

## 8. Warranty and Support

Specific warranty information is not provided in the product description. Please refer to the warranty card included with your product or visit the official Intex website for details regarding warranty coverage and customer support. For any technical assistance or inquiries, please contact Intex customer service directly.

