

[manuals.plus](#) /› [Waterstone](#) /› [Waterstone Hampton 8030-4-PN Two Handle Kitchen Faucet Instruction Manual](#)**Waterstone 8030-4-PN**

Waterstone Hampton 8030-4-PN Two Handle Kitchen Faucet Instruction Manual

Model: 8030-4-PN | Brand: Waterstone

1. PRODUCT OVERVIEW

The Waterstone Hampton 8030-4-PN is a two-handle kitchen faucet suite designed for deck-mount installation. This 4-piece suite typically includes the main faucet body, two lever handles, and a side spray. It features solid brass construction and a polished nickel finish, offering both durability and a classic aesthetic for your kitchen.

Key features include:

- Hot and cold double lever handles for precise temperature and flow control.
- Adjustable handle brake system to prevent handle sagging over time.
- Elegant C-spout design with an 8-1/4 inch spout reach.
- Solid brass construction ensures long-lasting performance.
- Includes 4 handle buttons: 2 matching finish and 2 hot/cold indicators.
- Diverter equipped for connection to the optional side spray.
- 1.75 gallons per minute (gpm) maximum flow rate.
- Reinforced braided connection hoses for secure installation.
- Lifetime Functional Warranty.

HAMPTON TWO HANDLED KITCHEN FAUCET



Product Description

- Hot and cold double lever handles.
- Adjustable handle brake system prevents handle sagging.
- Elegant C-spout design.
- 8-1/4" spout reach.
- Solid brass construction.
- 4 handle buttons included: 2 matching finish and 2 hot and cold buttons.
- Diverter equipped for connection to optional side spray.
- 1.75 gpm maximum flow rate.
- Reinforced braided connection hoses.
- Lifetime Functional Warranty.

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.18.1
- CSA B125.1
- NSF 61
- CALGreen

Finishes Available

FINISHES AVAILABLE:

Almond - 01
Antique Brass - AB
Antique Bronze - ABZ
Antique Copper - AC
American Bronze - AMB
Antique Pewter - AP

Black - 06

Black Nickel - BLN

Black-Oil Rubbed Bronze - ORB

Biscuit - 07

Caribbean Bronze - CB

Chocolate Bronze - CHB

Chrome - CH

Distressed Antique Brass - DAB

Distressed Antique Copper - DAC

Distressed American Bronze - DAMB

Distressed Antique Pewter - DAP

Euro-White - EW

Matte Black - MB

Polished Brass - PB

Polished Copper - PC

Polished Gold - PG

Polished Nickel - PN

Satin Chrome - SC

Satin Gold - SG

Satin Nickel - SN

Stainless Steel - SS*

 **ECO BRASS**
HIGH PERFORMANCE LEAD FREE BRASS

DIMENSIONS MAY VARY AND ARE SUBJECT TO CHANGE. NO RESPONSIBILITY IS ASSUMED FOR USE OF SUPERCEDED OR VOIDED DATA

**Contemporary Styles Only*

★ MADE IN AMERICA ★

41180 Raintree Court • Murrieta, CA 92562 • 1-888-304-0660 • 951-304-0520 • www.waterstoneco.com

REVISED: 1-1-15

Image 1: The Waterstone Hampton 8030-4-PN kitchen faucet suite, featuring the main faucet, two lever handles, a side spray, and a soap dispenser, all in a polished nickel finish.

2. SAFETY INFORMATION

- Always turn off the main water supply before beginning any installation or maintenance.
- Wear appropriate personal protective equipment, such as safety glasses and gloves, during installation.
- Ensure all connections are properly tightened to prevent leaks, but do not overtighten.

- If you are unsure about any part of the installation process, consult a qualified plumber.
- Keep small parts away from children to prevent choking hazards.

3. PACKAGE CONTENTS

Verify that all components are present before beginning installation:

- Waterstone Hampton Faucet Body (Model 8030)
- Two (2) Lever Handles
- Side Spray with Hose
- Mounting Hardware (washers, nuts, gaskets)
- Hot and Cold Water Supply Lines (reinforced braided hoses, 20" long with 3/8" compression fittings)
- Handle Buttons (2 matching finish, 2 hot/cold indicators)

4. INSTALLATION INSTRUCTIONS

This section provides general guidance for installing your Waterstone Hampton kitchen faucet. For detailed diagrams and specific steps, please refer to the included installation guide.

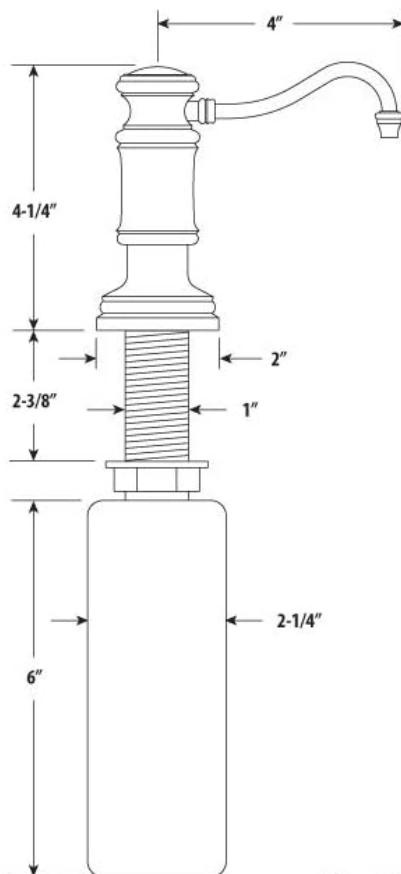
TRADITIONAL SOAP/LOTION DISPENSER - HOOK SPOUT



Product Description

- Solid brass construction.
- "Anti-wick" tip helps protect delicate patina finishes.
- 3 accent buttons included: 1 Soap, 1 Lotion, 1 plain with matching finish.
- PTFE guides for smooth action and solid feel.
- Easily replaceable pump.
- 12oz capacity (approx).
- Refill from top design.
- Requires 1-3/8" mounting hole.

- Max Counter Thickness 2-3/8"
- Recommended Install Hole Size 1-3/8"


ECO BRASS
HIGH PERFORMANCE BRASS FINISH

DIMENSIONS MAY VARY AND ARE SUBJECT TO CHANGE. NO RESPONSIBILITY IS ASSUMED FOR USE OF SUPERCEDED OR VOIDED DATA

Finishes Available

FINISHES AVAILABLE:

Almond - 01

Black - 06

Black Nickel - BLN

Distressed Antique Brass - DAB

Polished Copper - PC

Tuscan Brass - TB

Antique Brass - AB

Distressed Antique Copper - DAC

Polished Gold - PG

Venetian Bronze - VB

Antique Bronze - ABZ

Black-Oil Rubbed Bronze - ORB

Polished Nickel - PN

Weathered Brass - WB

Biscuit - 07

Distressed American Bronze - DAMB

Satin Chrome - SC

Weathered Copper - WC

Antique Copper - AC

Distressed Antique Pewter - DAP

Satin Gold - SG

White - WT

American Bronze - AMB

Euro-White - EW

Satin Nickel - SN

Antique Pewter - AP

Matte Black - MB

Stainless Steel - SS*

Chrome - CH

Polished Brass - PB

**Contemporary Styles Only*
★ MADE IN AMERICA ★

 41180 Raintree Court • Murrieta, CA 92562 • 1-888-304-0660 • 951-304-0520 • www.waterstoneco.com

REVISED: 7-31-14

Image 2: Cover of the Waterstone Two Handled Kitchen Faucet Installation Instructions, indicating models 8010-12, 8010-18, 8020, and 8030.

4.1 Pre-Installation Steps

1. Turn off the main water supply to the kitchen sink.
2. Clear the area under the sink and ensure you have adequate lighting.
3. Gather necessary tools, which typically include an adjustable wrench, screwdriver, plumber's putty or silicone sealant, and a basin wrench.
4. Ensure your counter has the appropriate hole sizes. The recommended install hole size is 1-5/8"

inches. The maximum counter thickness supported is 2-3/8 inches.



TWO HANDLED KITCHEN FAUCET INSTALLATION INSTRUCTIONS

Model #s:
8010-12
8010-18
8020
8030



★ MADE IN AMERICA ★

Image 3: Detailed diagram of the Waterstone Hampton two-handled kitchen faucet, showing dimensions, spout reach (8-1/4 inches), height (16 inches), and connection details for supply hoses and side spray.

4.2 Faucet Installation

1. Apply plumber's putty or silicone sealant around the base of the faucet body and handles, if required by your countertop material.
2. Insert the faucet body and handles into the pre-drilled holes on the countertop.
3. From underneath the sink, secure the faucet and handles using the provided washers and mounting nuts. Tighten firmly but do not overtighten.

4. Connect the hot and cold water supply lines to the corresponding inlets on the faucet. The included hoses are 20 inches long with 3/8 inch compression fittings.
5. Connect the side spray hose to the diverter port on the faucet body.
6. Ensure all connections are hand-tight, then use a wrench for a final quarter-turn to secure.

4.3 Post-Installation

1. Slowly turn on the main water supply.
2. Check all connections for leaks. If leaks are present, gently tighten the connections.
3. Remove the aerator from the spout and turn on both hot and cold water to flush out any debris from the lines. Run water for a few minutes.
4. Turn off the water, reattach the aerator, and test the faucet for proper operation.

5. OPERATING INSTRUCTIONS

The Waterstone Hampton faucet features two lever handles for controlling water flow and temperature.

- **Water Flow:** Rotate the handles away from the faucet body to increase water flow. Rotate towards the faucet body to decrease or shut off water flow.
- **Temperature Control:** Typically, one handle controls hot water and the other controls cold water. Adjust both handles simultaneously to achieve the desired water temperature.
- **Side Spray:** Press the button on the side spray head to activate the spray function. Release the button to return to the main faucet flow.

6. MAINTENANCE AND CARE

To maintain the finish and functionality of your Waterstone faucet, follow these guidelines:

- **Cleaning:** Clean the faucet regularly with a soft, damp cloth. For stubborn spots, use a mild soap and water solution. Rinse thoroughly and dry immediately to prevent water spots.
- **Avoid Harsh Cleaners:** Do not use abrasive cleaners, harsh chemicals, ammonia-based products, or scouring pads, as these can damage the finish.
- **Aerator Maintenance:** Periodically unscrew the aerator from the spout and clean any mineral deposits or debris that may have accumulated. This helps maintain optimal water flow.
- **Handle Adjustment:** If handles become loose or sag, the adjustable handle brake system can be tightened. Refer to the detailed installation guide for specific instructions.

7. TROUBLESHOOTING

Here are solutions to common issues you might encounter:

Problem	Possible Cause	Solution
Low Water Flow	Clogged aerator; partially closed shut-off valves; debris in supply lines.	Clean aerator. Ensure shut-off valves are fully open. Flush supply lines.
Leaks at Faucet Base	Improperly seated gasket; loose mounting nuts.	Check and reseat gaskets. Tighten mounting nuts.
Leaks from Handles	Worn O-rings or cartridges.	Contact Waterstone customer support for replacement parts or service.

Problem	Possible Cause	Solution
Side Spray Not Working	Divertor clogged or faulty; spray head clogged.	Clean spray head. Check diverter for obstructions.

If you experience issues not covered here or require further assistance, please contact Waterstone customer support.

8. SPECIFICATIONS

Feature	Detail
Brand	Waterstone
Model Number	8030-4-PN
Product Name	Hampton Two Handle Kitchen Faucet 4pc. Suite
Finish	Polished Nickel
Mounting Type	Deck Mount
Number of Handles	2
Installation Type	Mini-spread, Centerset
Item Weight	30 Pounds
UPC	737356659896
Maximum Flow Rate	1.75 gpm
Max Counter Thickness	2-3/8 inches
Recommended Install Hole Size	1-5/8 inches
Supply Hoses	20 inches long with 3/8 inch Compression Fittings

8.1 Applicable Codes and Standards

- ASME A112.18.1
- CSA B125.1
- NSF 61
- CALGreen



Image 4: A comprehensive chart displaying various finishes available for Waterstone products, including Polished Nickel, Chrome, Antique Bronze, and many others.

9. WARRANTY INFORMATION

Waterstone provides a **Lifetime Functional Warranty** for this product. This warranty covers defects in materials and workmanship under normal use and service. For specific terms and conditions, or to make a warranty claim, please refer to the official Waterstone warranty documentation or contact customer support.

10. CUSTOMER SUPPORT

For technical assistance, replacement parts, or any questions regarding your Waterstone Hampton faucet, please contact:

Address: 41180 Raintree Court, Murrieta, CA 92562, USA

Phone: 1-888-304-0660 or 951-304-0520

Website: www.waterstoneco.com

