



ATEN US3311 2-Port 4K DisplayPort USB-C KVM Dock Switch Owner's Manual

[Home](#) » [Aten](#) » ATEN US3311 2-Port 4K DisplayPort USB-C KVM Dock Switch Owner's Manual 




Contents

- [1 ATEN US3311 2-Port 4K DisplayPort USB-C KVM Dock Switch](#)
- [2 Hardware Overview](#)
- [3 Installation](#)
- [4 Package Contents](#)
- [5 Host Requirement](#)
- [6 Installation](#)
- [7 Operation](#)
- [8 Documents / Resources](#)
 - [8.1 References](#)
- [9 Related Posts](#)

ATEN US3311 2-Port 4K DisplayPort USB-C KVM Dock Switch



Hardware Overview

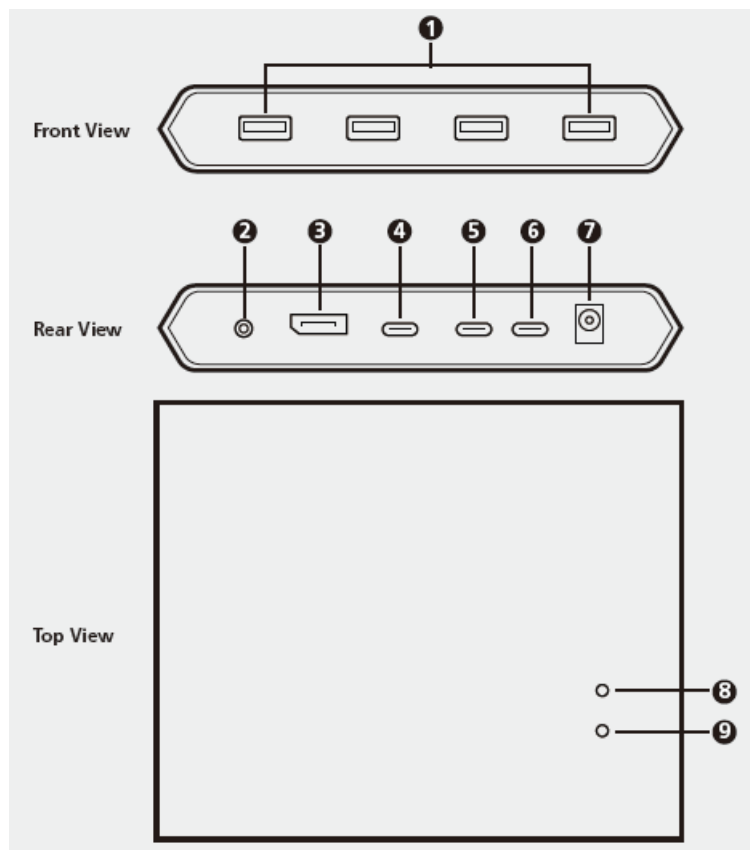


1. USB Type-A ports
2. jack for port switch button
3. DisplayPort out
4. USB-C port (source 2)
5. USB-C port (source 1)
6. USB-C port (power)*
7. power jack
8. port 1 status LED

9. port 2 status LED

Note: This USB-C port (power) supports USB-C PD laptop charging at 5V, 9V, 15, and 20V output, and the USB-C power adapter is not supplied in the package.

Installation

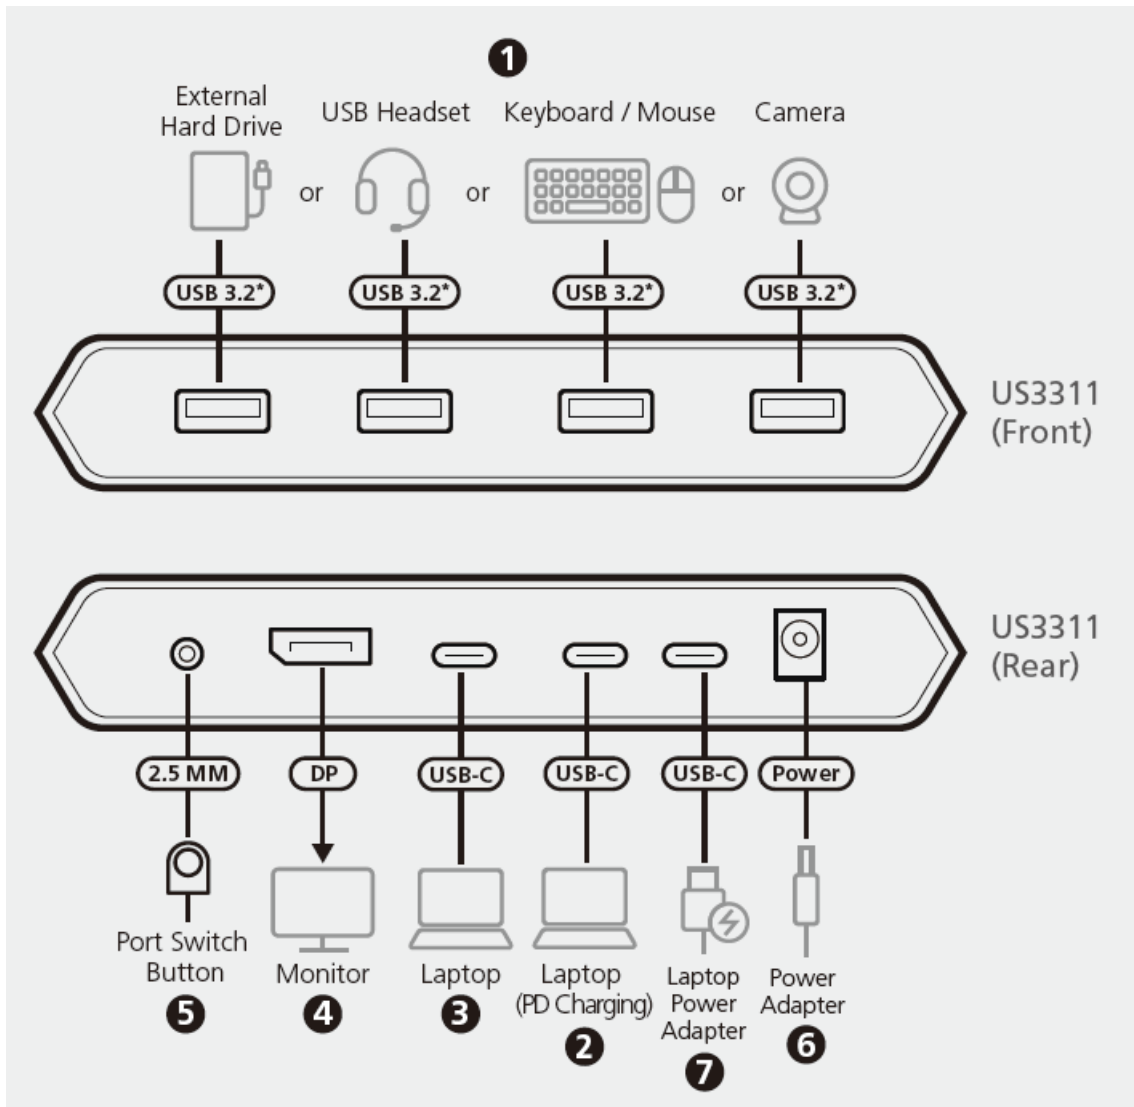

Package Contents

- 1 US3311 2-Port 4K DisplayPort
- USB-C KVM Dock Switch with
- Power Pass-Through
- 1 power adapter
- 2 USB-C cables
- 1 port switch button
- 1 user instructions

Support and Documentation Notice

All information, documentation, firmware, software utilities, and specifications contained in this package are subject to change without prior notification by the manufacturer. To reduce the environmental impact of our products, ATEN documentation and software can be found online at <http://www.aten.com/download/>

Host Requirement

USB-C enabled computer or smartphone / tablet with one of the following operating systems:

- Windows® 10 (32-bit / 64-bit) with 7th-Gen Intel Core Processor or above
- MacOS X 10.12 or later
- iPadOS 13.1 or later
- Android 8.0 or later

Note: To transmit video through a USB-C port, make sure your computer supports DP Alt Mode over the USB-C port, and that it has been enabled.

Installation


1. Connect up to 4 USB peripherals such as a USB mouse, USB keyboard, printer, or external hard drive to the unit's USB Type-A ports.
2. Connect a USB-C source device to the unit's USB-C port (source1).
3. Connect another USB-C source device to the unit's USB-C port (source 2).
4. Connect a DisplayPort-enabled display to the unit's DisplayPort output port.
5. Connect the supplied port switch button to the indicated jack.
6. Connect the power adapter to the unit's power jack.
7. (Optional) You can connect your source device to the USB-C port (power) for PD laptop charging.

Note: For device charging, a Limited Power Source (LPS) certified USB-C PD Power Adapter over 65 watts is recommended. The system power requirement for basic USB functions and video output should be at least 5V, 3A.

Operation

- Press the port switch button to switch KVM control between the two USB-C source devices. The port LED for the selected port lights white.
- Press and hold the port switch button for 3 seconds if you encounter any monitor compatibility issues.

Documents / Resources

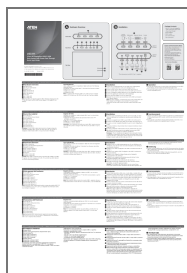

[ATEN US3311 2-Port 4K DisplayPort USB-C KVM Dock Switch](#) [pdf] Owner's Manual
US3311 2-Port 4K DisplayPort USB-C KVM Dock Switch, US3311, 2-Port 4K DisplayPort USB-C KVM Dock Switch, 4K DisplayPort USB-C KVM Dock Switch, DisplayPort USB-C KVM Dock Switch, USB-C KVM Dock Switch, KVM Dock Switch, Dock Switch, Switch

References

- [ATEN - Simply Better Connections | ATEN U.S.A.](#)
- [Downloads | ATEN Corporate Headquarters](#)

