



---


[Home](#) » [AUDIOTEC FISCHER](#) » **AUDIOTEC FISCHER M142050 Match MEC Analog In Module**  
**Owner's Manual** 

## **Contents** [ [hide](#) ]

- [1 AUDIOTEC FISCHER M142050 Match MEC Analog In Module](#)
- [2 Specifications](#)
- [3 Product Usage Instructions](#)
- [4 Congratulations](#)
- [5 General installation instructions for HELIX / MATCH components](#)
- [6 Technical data](#)
- [7 Mounting information](#)
- [8 Signal routing of the Extension Card](#)
- [9 Warranty disclaimer](#)
- [10 CONTACT](#)
- [11 FAQ](#)
- [12 Documents / Resources](#)
  - [12.1 References](#)

AUDIOTEC  
FISCHER

**AUDIOTEC FISCHER M142050 Match MEC Analog In Module**

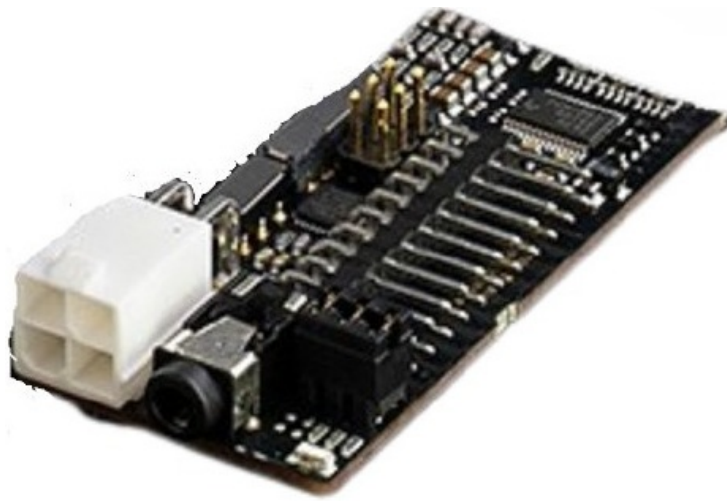

## Specifications

- Input voltage highlevel: 1.5 – 30 Volts (adjustable)
- Input voltage lowlevel: 0.5 – 8 Volts (adjustable)
- Lowlevel input: 3.5 mm jack
- Additional features: ADEP.3, Auto Remote function, INFO LED status information

## Product Usage Instructions

- Before beginning the installation process, it is crucial to read the manual carefully to prevent damage to the unit and ensure proper installation.
- Disconnect the battery's negative terminal and all cables from the device.
- For optimal performance and warranty coverage, consider having the product installed by an authorized HELIX / MATCH dealer.

## Load Jumper Configuration

- Ensure the Load Jumper is configured correctly according to the provided instructions to prevent damage to the ANALOG IN module.

## Mounting Instructions

- Disconnect all cables from the device.
- Depending on the device, follow the appropriate steps to access the Extension Card slot.
- Insert the Extension Card into the designated slot of the device as instructed in the manual.

## **Connecting Signal Source**

- When connecting a signal source solely to the module's stereo line input, ensure to connect the remote input of the device to power up the amplifier / DSP.

## **ANALOG INPUT MODULE FOR HELIX / MATCH DEVICES**

### **Congratulations**

**Dear Customer,**

- Congratulations on your purchase of this high-quality HELIX / MATCH
- EXTENSION CARD. This module is produced by using the latest technology. We wish you many hours of enjoyment with your new Audiotec Fischer product.
- Yours, AUDIOTEC FISCHER

### **General installation instructions for HELIX / MATCH components**

- To prevent damage to the unit/module and possible injury, read this manual carefully and follow all installation instructions. This product has been checked for proper function prior to shipping and is guaranteed against manufacturing defects.
- Before starting your installation, disconnect the battery's negative terminal and all cables from the device to prevent damage to the unit/module, fire and/or risk of injury. For a proper performance and to ensure full warranty coverage, we strongly recommend to get this product installed by an authorized HELIX / MATCH dealer.
- Install the Extension Card only in the designated device and its specific slot. Using the module in other devices or slots can result in damage of the Extension Card, the device, the head unit/radio or other connected devices!

### **Technical data**


- Input voltage highlevel: 1.5 – 30 Volts (adjustable)
- Input voltage low level: 0.5 – 8 Volts (adjustable)
- Low-level input: 3.5 mm jack
- Additional features: ADEP.3, Auto Remote function

## INFO LED status information

- Green: Low-level input used (regardless of the Load Jumper)
  - **or**
- High-level input used & Load jumper removed
- Orange High Level input used & Load Jumper installed

## Mounting information


1. At first, disconnect all cables from the device.
2. Depending on the device, there are two possibilities to get access to the Extension Card slot.
  1. Bottom plate is bolted: untighten the screws of the bottom plate and remove it. Afterwards, dismantle the appropriate side panel by removing its screws.
  2. Bottom plate is not bolted: dismantle the appropriate side panel by removing its screws and pull out the bottom plate sideways.
3. **IMPORTANT:** Adapt the input sensitivity and the input load to the connected signal source.

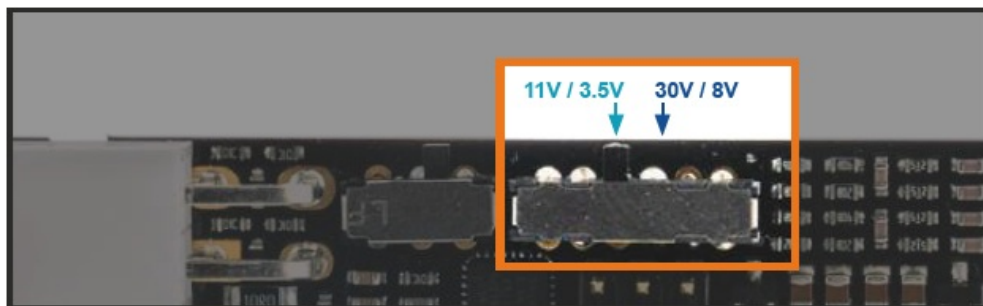

The factory setting of the input sensitivity (11 V / 3.5 V) of the module is appropriate for the most common radios.

As soon as the signal source which is connected to the highlevel inputs provides an input voltage between 11 V and 30 V – e.g. if an OEM amplifier is used as signal source – the Load Jumper has to be removed immediately and the Input Sensitivity switch must be set to the 30 V / 8 V position.

If you are unsure regarding the signal sources' output voltage, please contact your HELIX / MATCH specialist dealer.

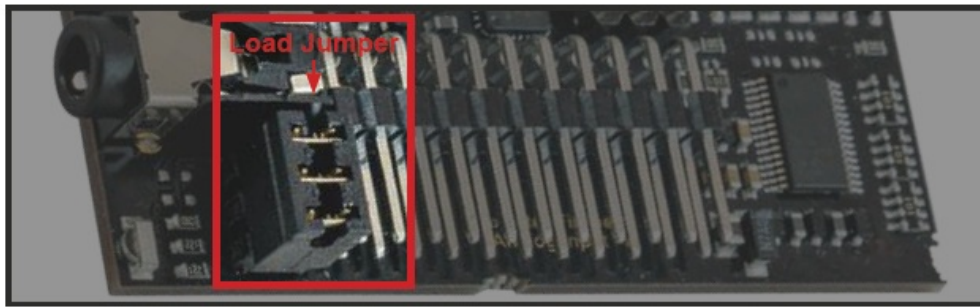


Input Sensitivity	Load Jumper Configuration
11 V / 3.5 V	Jumper installed
30 V / 8 V	Jumper removed

**Important notice:** It is mandatory to check the configuration of the Load Jumper before the first use, otherwise it could cause severe damage to the ANALOG IN module! The position is also indicated in the DSP PC-Tool software.

- If the highlevel input of the module is used as the primary and only highlevel input, the automatic turn-on function can be activated (Auto Remote = On).

This function will turn on and off the whole device together with the signal source.


**Note:** The automatic turn-on feature of the highlevel inputs is deactivated ex works (Auto Remote = Off).

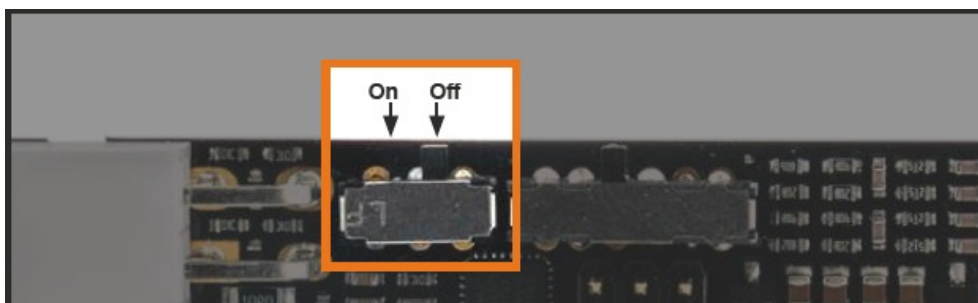



As soon as a signal source is solely connected to the module's stereo line input, it is mandatory to connect the remote input of the device to power up the amplifier / DSP.

- Insert the Extension Card into the specific slot of the device, which is marked in the following picture (the picture representatively displays the Extension Card slot of the MATCH UP 7DSP).


The exact position of the slot can be found in the manual of each device:

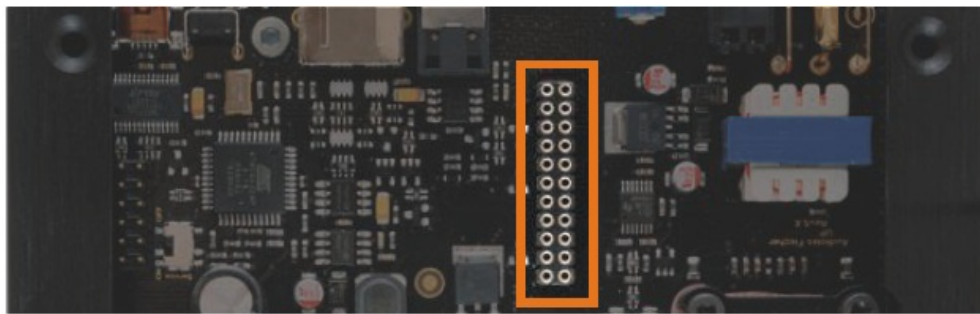


6. Make sure that the module is installed properly and all pins are fully inserted into the socket:

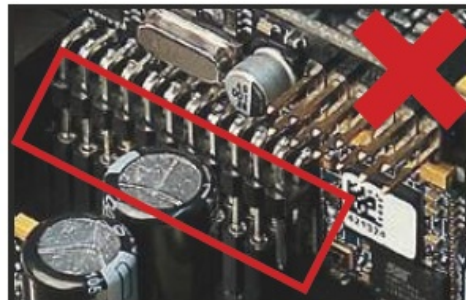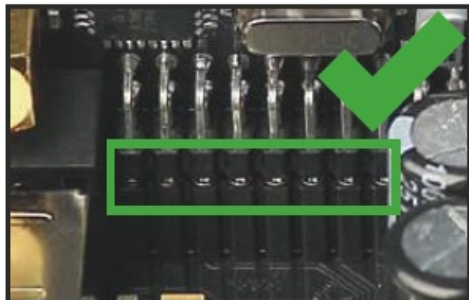

7. If the bottom plate was bolted, fix the new side panel, which is delivered with the Extension Card. Afterwards, reinsert the bottom plate and fix it, too. Otherwise, reinsert the bottom plate at first and then fix the new side panel with the screws.
8. Reconnect the power supply and ground cable to the device.
9. Connect the amplifier / DSP to your computer. If you have to bridge longer distances please use an active USB extension cable with integrated repeater or the optionally available WIFI CONTROL interface.
10. First turn on the device and then start the latest software or at least software version 4.61a. The Extension Card is automatically detected.
11. **IMPORTANT:** After you have made the rough adjustment of the input sensitivity and input load (see point 3), the input sensitivity has to be fine-adjusted in the DCM menu of the DSP PC-Tool software. To do so follow the subsequent steps:
  1. Open the “Extended Features” tab of the DCM menu.
  2. Select the configured Input Sensitivity Switch Position position of your module.

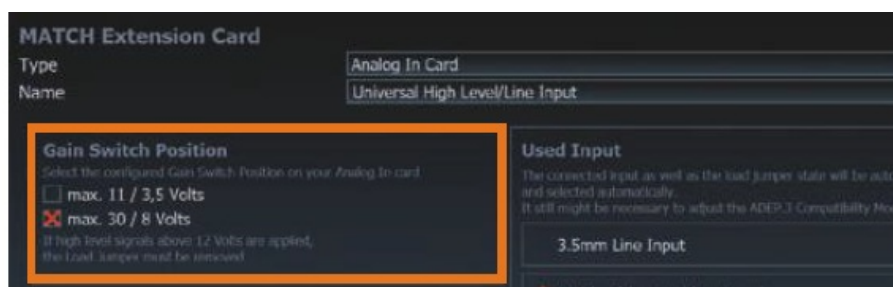

3. Adjust the input sensitivity to match the output voltage of the connected signal source.

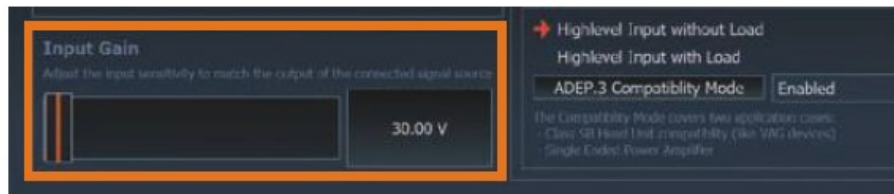

12. Reconnect all remaining cables to the device.

Make sure that the polarity is correct. If one or more connections have reversed polarity it may affect the performance of the device.

**Important:** It is strictly forbidden to use the modules' highlevel and lowlevel line input of an individual channel at the same time, as this may cause severe damage to your head unit/car radio.


Nevertheless, it is possible to use the highlevel input of one channel and the lowlevel line input of another channel simultaneously.

**Attention:** Solely use the connection cable with the 4-pole connector and open leads, which is included in the delivery, to connect a signal source to the highlevel inputs of the module!

For the connection of the 3.5 mm stereo line input, we recommend using a shielded 3.5 mm jack cable to avoid any background noise.


## Signal routing of the Extension Card

- Now the inputs can be freely configured as additional MAIN Inputs or as an AUX source. To do so route the "AUX L" and "AUX R" signals, whether in the "Main Routing" tab or in the "AUX / HEC Routing" tab.

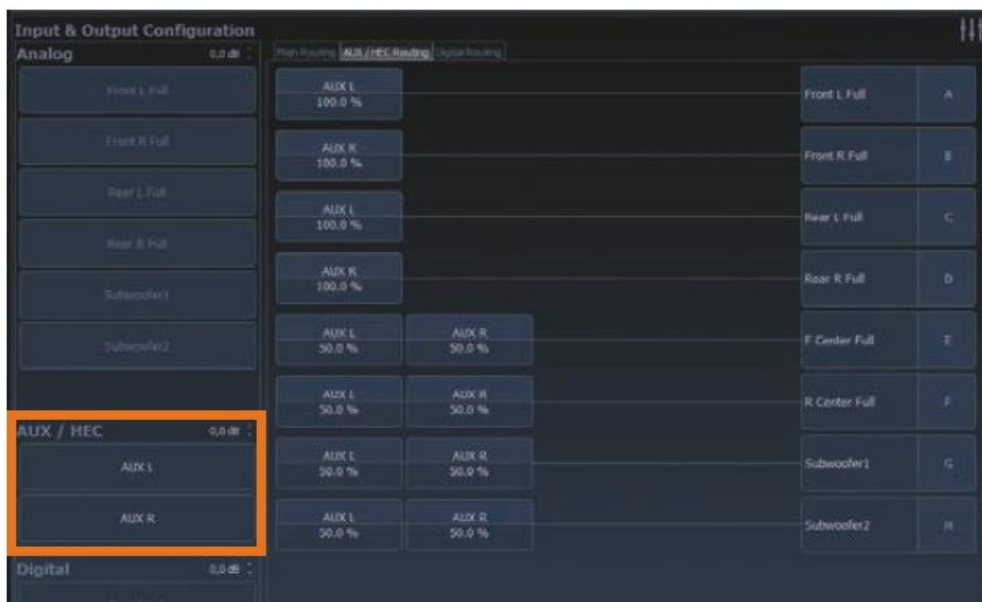



- The “Used Input” window indicates automatically which input is connected, and in case of the highlevel input, it also indicates the position of the Load Jumper. The used input has influence of the adjustable range of the “Input Gain” configuration.

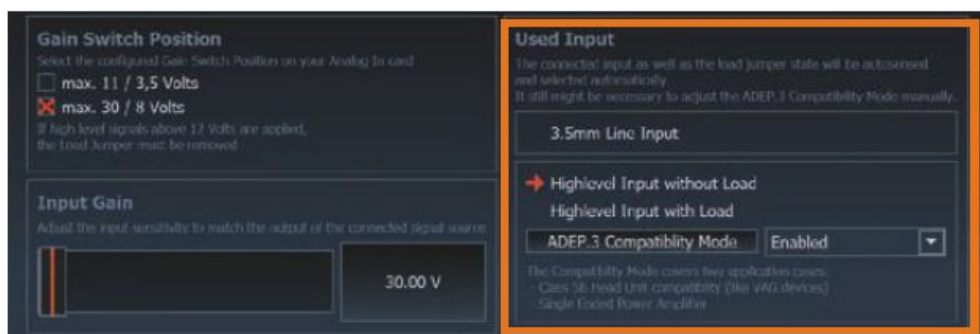

## Warranty disclaimer

- The limited warranty complies with legal regulations. Failures or damages caused by overload or improper use are not covered by the warranty.
- Please return the defective product only with a valid proof of purchase and a detailed malfunction description.
- Technical specifications are subject to change! Errors are reserved!
- For damages to the vehicle and the device caused by handling errors of the module, we can't assume liability.
- These devices are certified for use in vehicles within the European Community (EC).

## CONTACT

- Hünegräben 26 · 57392 Schmallenberg · Germany · Tel.: +49 2972 97880 · E-mail: [contact@audiotec-fischer.com](mailto:contact@audiotec-fischer.com)

## FAQ

- **Q: What should I do before starting the installation process?**
  - **A:** Before installation, disconnect the battery's negative terminal and all cables from the device to prevent damage.
- **Q: How can I prevent damage to the Extension Card and other connected devices?**
  - **A:** Install the Extension Card only in the designated device and slot as indicated in the manual.




# Documents / Resources




[AUDIOTEC FISCHER M142050 Match MEC Analog In Module \[pdf\]](#) Owner's Manual  
PP 62DSP, M142050, M142050 Match MEC Analog In Module, M142050, Match MEC Analog In Module, MEC Analog In Module, Analog In Module, In Module

## References

- [User Manual](#)

 AUDIOTEC  
FISCHER

 Analog In Module, AUDIOTEC FISCHER, In Module, M142050, M142050 Match MEC Analog In Module, Match MEC Analog In Module, MEC Analog In Module, PP 62DSP

---

## Leave a comment

Your email address will not be published. Required fields are marked \*

Comment \*

Name

Email

Website

---

☐ Save my name, email, and website in this browser for the next time I comment.

**Post Comment**

**Search:**

e.g. whirlpool wrf535swhz

**Search**

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.