



# AULA F99 Wireless Mechanical Keyboard Instruction Manual

[Home](#) » [AULA](#) » AULA F99 Wireless Mechanical Keyboard Instruction Manual 


## Contents

- [1 AULA F99 Wireless Mechanical Keyboard Instruction Manual](#)
- [2 Functions and Indicators](#)
- [3 Product features](#)
- [4 Specifications](#)
- [5 Operating instructions](#)
- [6 Read More About This Manual & Download PDF:](#)
- [7 Documents / Resources](#)
  - [7.1 References](#)

## AULA F99 Wireless Mechanical Keyboard Instruction Manual



## Functions and Indicators

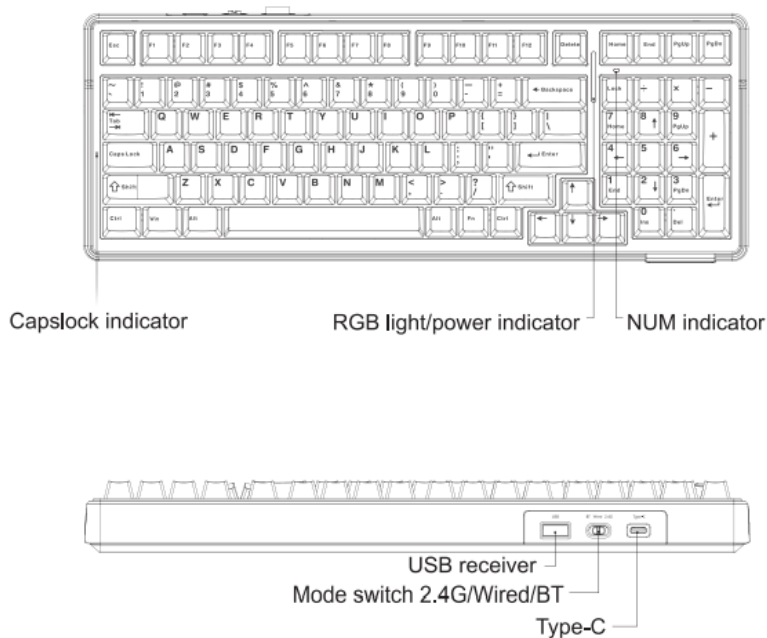

## Product features

Stylish design with Gasket construction and a fine, soft and flexible feel. Keycaps and mechanical switches are pluggable. 4000mAh 2 large-capacity Lithium battery can be recharged, with power switch, environmental protection and energy saving, saving worry and money, effectively extending battery life. FN+ key combination {0 switch between 15 RGB light effects. With the dive with music rhythm RGB lighting effect, there are 5 lighting effect modes to choose from under this lighting effect. Cooperate with the drive keys with custom functions and macro definitions. Humanized design of the keyboard, adding a series of commonly used shortcuts.

## Specifications

- Connection: Type-C wired & 2.4G wireless & BT + With Gasket construction
- Number of keys: 89 keys + Pluggable mechanical switch
- RGB swichable lighting effects Lithium battery: rechargeable Lithium battery 4000mAh 2
- Charging voltage/current: DC 5V/830mA.
- Rated voltage: DC 3.7V + Battery life: = 53 hours (default lighting effect) = 400 hours (with backlight and side lights of)
- Dimensions: 390.63 (L) x 146.78 (W) x 42.57 (H) 40.5mm
- Weight: 1183g + Operating system: WIN XP7/8/10/Android/iOS/MAC

FN+ / 123 in the upper left corner to be able to long press on the code)

Fn+	ESC	~`	1	2
Combination Function	restore the default	2.4G	BT 1#	BT 2#
Fn+	3	Q	W	E
Combination Function	BT 3#	Android	WIndows	Mac
Fn+	R	\	TAB	↑
Combination Function	IOS	Lighting mode switch	Colour switching	Brightness+
Fn+	↓	←	→	WIN
Combination Function	Brightness-	Speed-	Speed+	Lock WIN
Fn+	Shift-R	/?	B	Alt-R
Combination Function	Switching RGB ambient light bar mode	Switching RGB ambient light bar colours	Switch RGB ambient light bar to power mode	Cycles the brightness of the RGB ambient light bar
Fn+	Ctrl-R	DEL	U	I
Combination Function	Cycle through RGB ambient light bar speeds	INS	PRTSC	SCRLK
Fn+	O			
Combination Function	PAUSE			

FN+Q=Android system (Q button red light flashes for 3s), F area single press function a and F area FN combination function.

Key	F1	F2	F3	F4	F5	F6
Single press	Screen brightness-	Screen brightness+	Convert window	Return to Desktop	Brightness-	Brightness+
Fn Combination	F1	F2	F3	F4	F5	F6
Key	F7	F8	F9	F10	F11	F12
Single press	previous	Play/Pause	Next song	Mute	Volume -	Volume+
Fn Combination	F7	F8	F9	F10	F11	F12

N indows system (W key red light lashes for 35), area single press function and F area FN combination functon.

Key	F1	F2	F3	F4	F5	F6
Single press	F1	F2	F3	F4	F5	F6
Fn Combination	homepage	email	Convert window	Open Explorer	Brightness-	Brightness+
Key	F7	F8	F9	F10	F11	F12
Single press	F7	F8	F9	F10	F11	F12
Fn Combination	previous	Play/Pause	Next song	Mute	Volume -	Volume+

FN+E=Mac system (£ button red light flashes for 3s), F zone single press function and F zone FN combination function.

Key	F1	F2	F3	F4	F5	F6
Single press	Screen brightness-	Screen brightness+	Convert window	Return to Desktop	Brightness-	Brightness+
Fn Combination	F1	F2	F3	F4	F5	F6
Key	F7	F8	F9	F10	F11	F12
Single press	previous	Play/Pause	Next song	Mute	Volume -	Volume+
Fn Combination	F7	F8	F9	F10	F11	F12

FN+R=IOS system (R key red light flashes for 3s), F-zone single press function and F-zone FN combination function.

Key	F1	F2	F3	F4	F5	F6
Single press	Screen brightness-	Screen brightness+		Return to Desktop	Brightness-	Brightness+
Fn Combination	F1	F2	F3	F4	F5	F6
Key	F7	F8	F9	F10	F11	F12
Single press	previous	Play/Pause	Next song	Mute	Volume -	Volume+
Fn Combination	F7	F8	F9	F10	F11	F12

## Operating instructions

2.4G mode: the upper left switch is dialled to 2.4G mode, the cyan light of the “~ key blinks slowly, and then press FN+~ key for 3 seconds to enter the code pairing state, then plug in the receiver to finish the code pairing, the cyan light of the “~ key is on for 25s, the 2.4G connection is successful. The factory default has been pairing code.

BT Mode: Top left switch toggle to Bluetooth mode BLE5.0/Bluetooth 5.0 (device name AULA-F99 3.0/AULA-F89 5.0), can connect 3 devices: FN+1=BT 1, the blue indicator light under the key is flashing fast, back to the connection is flashing slowly, the blue light is on for 25s when connected. FN+2=BT 2, the blue indicator light under the key is fast flashing, back to connect slow flashing, connect to blue light 2s. FN+3=BT 3, the blue light under the key is flashing fast, back to connect the slow flash, connect the blue light 2s.

Wired mode: Top left switch to connector button lights up for 25s, wired mode, white light on

FN+Esc long press for three seconds = Restore default. The original connected BT device save will not be cleared.

FN+Shift-R=Switch light bar light mode, FN+/? = switch light bar colour; FN#AILR light bar brightness cycle,


FN+Cir-R = light bar speed cycle. FN+i=Brightness+ FN+=Brightness- FN+---=Spes FN+Q=Android,

FN+W=Windows, FN+E=Mac, FN+R=IOS. FN+Tab=Toggle light effect colour. FN+WIN-L=Lock/Unlock left WIN

window key (Lock WIN indicator light is always on when locking WIN. under WIN system). After switching to Mac/iOS system, WIN-L/ALT-L position is swapped (without locking WIN). FN+B=RGB ambient light bar can show keyboard power level, charging streaming light display. Full long bright green, 5 lights each green light indicates 20% battery. Low battery all red indication.

***Read More About This Manual & Download PDF:***

## Documents / Resources

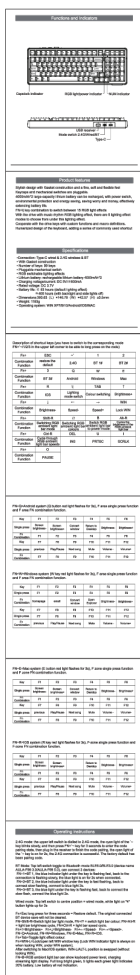

[AULA F99 Wireless Mechanical Keyboard](#) [pdf] Instruction Manual  
F99 Wireless Mechanical Keyboard, F99, Wireless Mechanical Keyboard, Mechanical  
Keyboard, Keyboard

## References

- User Manual

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.