




AV Access 4KSW21-DM 2 x 1 Dual-Monitor KVM Switcher User Manual

[Home](#) » [AV Access](#) » AV Access 4KSW21-DM 2 x 1 Dual-Monitor KVM Switcher User Manual 



— Simplify your life —
AV Access

4KSW21-DM
2 x 1 Dual-Monitor KVM Switcher



User Manual

Contents

- 1 Disclaimers
- 2 Important Safety Instructions
- 3 Introduction.
- 4 Features
- 5 Package Contents
- 6 Panel
- 7 Application
- 8 KVM Mode
- 9 USB Mode
- 10 Control of the Switcher
- 11 Front Panel Control
- 12 Hotkey Function
- 13 Specifications
- 14 Transmission Distance
- 15 Trouble Shooting
- 16 Warranty
- 17 Documents / Resources
 - 17.1 References
- 18 Related Posts

Disclaimers

The information in this manual has been carefully checked and is believed to be accurate. AV Access Technology Limited assumes no responsibility for any infringements of patents or other rights of third parties which may result from its use.

AV Access Technology Limited assumes no responsibility for any inaccuracies that may be contained in this document. AV Access Technology Limited also makes no commitment to update or to keep current the information contained in this document.

AV Access Technology Limited reserves the right to make improvements to this document and/or product at any time and without notice.

Copyright

Copy, Reproduce, Distribute, and/or Edit of this document or part of it as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved. Copyright ©2017 AV Access Technology Limited All rights reserved.

Trademarks Notice

All products or service names mentioned in this document may be trademarks of the companies with which they are associated.

Contact Us

Email: info@avaccess.com

Important Safety Instructions

- Do not expose this device to rain, moisture, dripping, or splashing. No objects filled with liquids, such as vases, shall be placed on the device.
- Do not install or place this unit in a bookcase, built-in cabinet, or in another confined space. Ensure the unit is well ventilated.
- To prevent the risk of electric shock or fire hazards due to overheating, do not obstruct the unit's ventilation

openings with newspapers, tablecloths, curtains, or similar items.

- Do not install near any heat sources such as radiators, heat registers, stoves, or other devices (including amplifiers) that produce heat.
- Do not place sources of naked flames, such as lighted candles, on the unit.
- Clean this device only with a dry cloth.
- Unplug this device during lightning storms or when unused for long periods of time.
- Protect the power cord from being walked on or pinched, particularly at plugs.
- Only use attachments/accessories specified by the manufacturer.
- Refer all servicing to qualified service personnel

Introduction.

Overview

4KSW21-DM is a 2×1 HDMI KVM Switcher with dual-channel switching and hotkey switching. It supports HDMI 2.0 and HDCP 2.2 compatibility, and supports resolutions up to 4K@60Hz 4:4:4 8bit, and can also transmit USB 3.0 signal up to 5Gbps for KVM function. It can share two monitors and USB devices between two PCs and supports two modes to operate.

The switcher features a virtual interaction function, and automatically wake-up the connected PC in standby mode, which can reduce the switching time. It also supports direct switching through buttons on the front panel and hotkey through the keyboard connected to the special USB 1.1 port. It provides a wide compatibility choice for different operating systems, such as Windows, Mac OS and Linux, no driver required, and simple plug-and-play.

Features

- 2 in 1 dual-channel KVM switcher:
- Each input group supports two independent HDMI input channels, which can be connected to two HDMI output ports of the PC and extended to two external monitors.
- Each monitor has an independent channel, which can support different resolutions.
- Supports HDMI 2.0 with resolutions up to 4K@60Hz 4:4:4 8bit and HDCP 2.2 compatibility.
- Supports all HDR formats, such as HDR 10, HLG, HDR 10+, and Dolby Vision.
- Supports USB 3.0 super-speed data transmission with speeds up to 5Gbps.
- Supports new generation PC automatic wake-up function, when switching to the PC in sleep mode, it will automatically wake up the PC and no other operations are needed.
- Fast switching, is based on the virtual interaction function.
- One USB 1.1 port for the keyboard and three USB 3.0 ports for USB devices.
- Supports microphone input and headphone output for audio application.
- Supports KVM and USB operation mode, which can be selected via the DIP switch on the front panel.
- Supports button switch and hotkey switch (Keyboard must be connected to USB 1.1 port).
- Supports CEC trigger on HDMI outputs.
- No driver required, plug and play.


Package Contents

Before you start the installation of the product, please check the package contents:

- Switcher x 1
- Power Adapter (DC 12V 3A) x 1
- AC Power Cord with US Pins x 1
- AC Power Cord with EU Pins x 1
- AC Power Cord with UK Pins x 1
- USB 3.0 Type-A to Type-B Cable (L=1.8m) x 2
- User Manual x 1


Panel

Front Panel

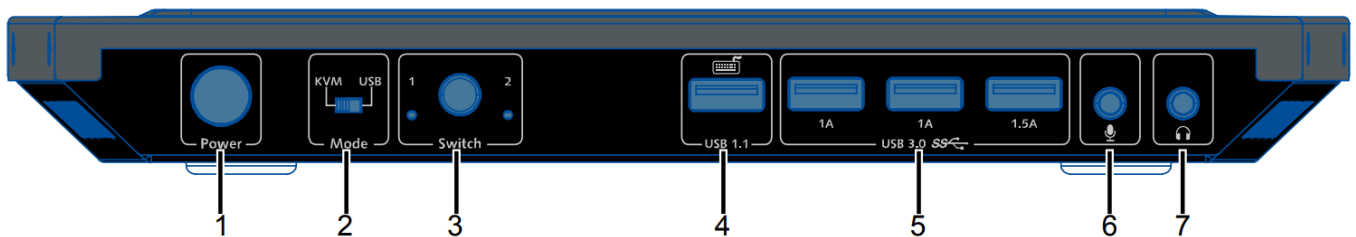

No.	Name	Description
1	Power Switch	Press to power on/off the device.
2	Mode	KVM: Set the device to “KVM” mode (default). USB: Set the device to “USB” mode. Note: Detail information, please refer to the “Application” section.
3	Switch Button and LED 1&2	Press to select input group between HDMI In 1A/1B and HDMI In 2A/2B. LED 1&2: On: Select HDMI In 1A and 1B or HDMI In 2A and 2B as input sources. Off: The corresponding HDMI Inputs are not selected.
4	USB 1.1	USB 1.1 type-A port, can be used to connect to a USB keyboard for hotkey function. (Detail information, please refer to the “Hotkey Function” section) Note: It is specialized for connecting the keyboard and not recommended to connect to other USB slave devices.
5	USB 3.0	USB 3.0 type-A ports, can be used to connect to USB 3.0 high-speed devices for KVM function. Note: With one high power port of 5V 1.5A supported, it can be used for connecting USB devices with high power, such as connecting a USB Camera.
6	MIC In	Connect to a Microphone. The Microphone follows the USB Host port selected.
7	Line Out	Connect to an earphone. The earphone follows the USB Host port selected.

Rear Panel

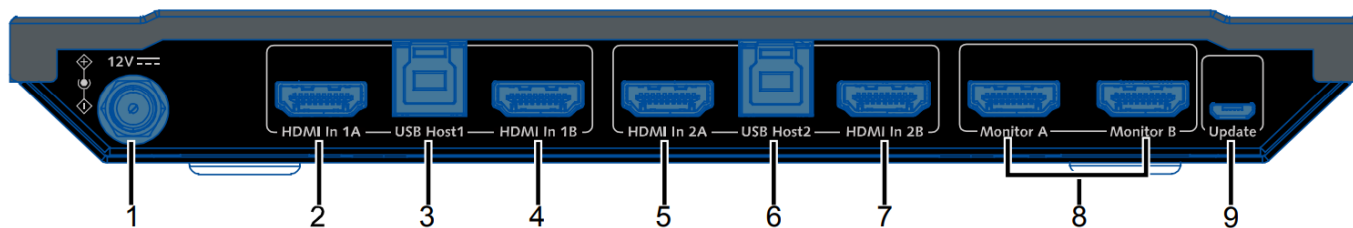

No.	Name	Description
1	DC 12V	Connect to the power adapter provided.
2&4	HDMI In 1A & 1B	Connect to two HDMI output ports of PC respectively. HDMI In 1A and HDMI In 1B can be seen as a group, hereinafter referred to as group 1 in this manual.
3	USB Host 1	Connect to a host device. USB Host 1 is bound with group 1. When select group 1 as sources to input, the USB devices can be connected to the host PC connected to USB Host 1 port.
5&7	HDMI In 2A & 2B	Connect to two HDMI output ports of PC respectively. HDMI In 2A and HDMI In 2B can be seen as a group, hereinafter referred to as group 2 in this manual.
6	USB Host 2	Connect to a host device. USB Host 2 is bound with group 2. When select group 2 as sources to input, the USB devices can be connected to the host PC connected to the USB Host 2 port.
8	Monitor A & B	Connect to HDMI displays.
9	Update	Micro USB, for firmware upgrade.

Application

Warnings:


- Before wiring, disconnect the power from all devices.
- During wiring, connect and disconnect the cables gently.

The switcher supports two application modes: KVM mode and USB mode. It can be set through a DIP switch on the front panel. By default, the switcher is in KVM mode.



KVM Mode

Switch the DIP switch to “KVM” mode. Wiring as the following figure.

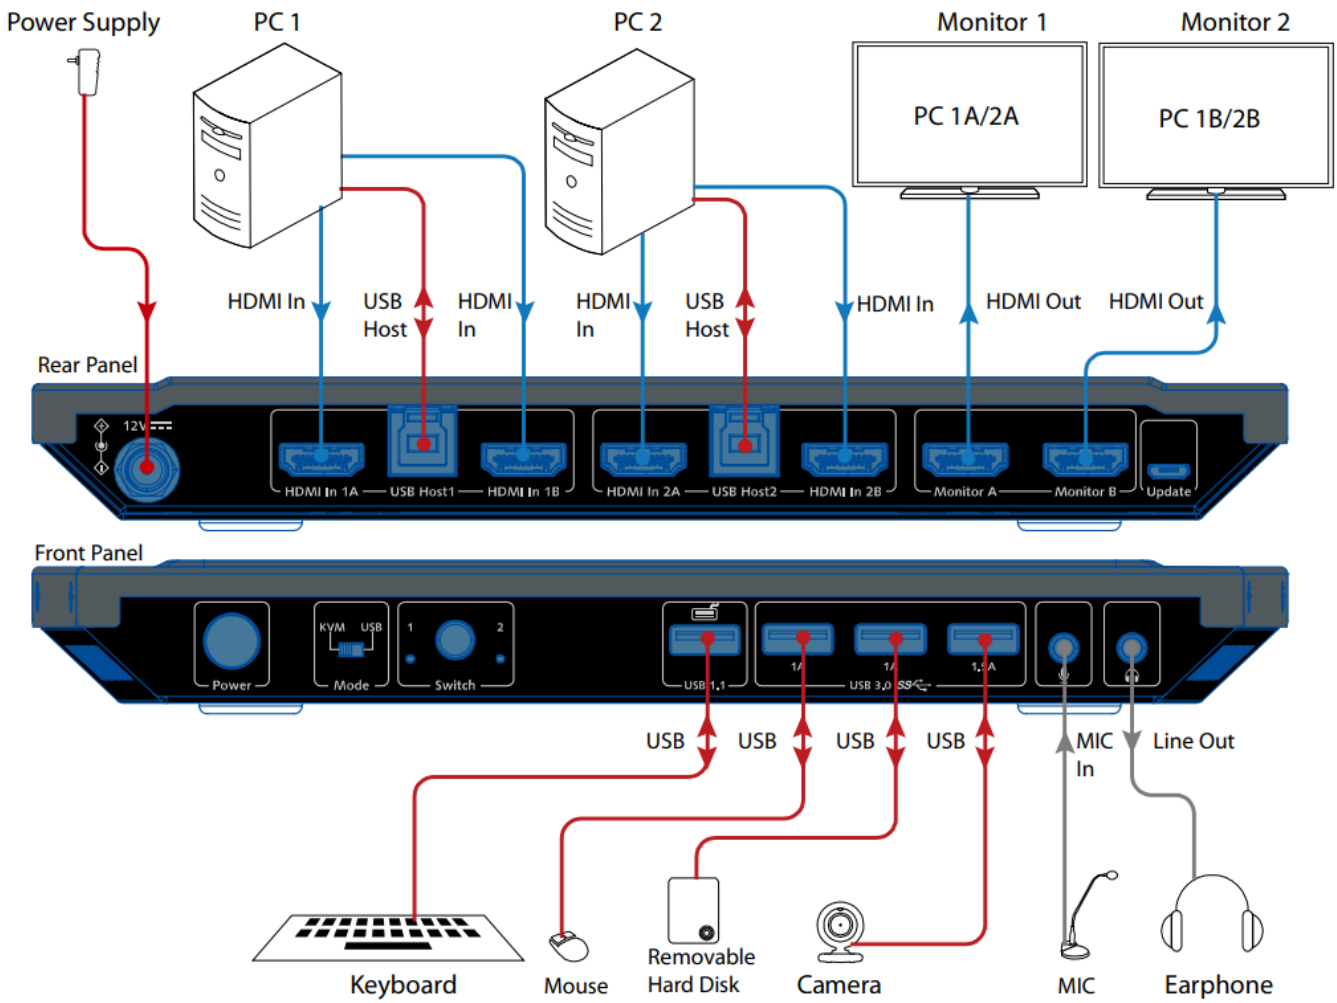


In this mode, when switching the input source to group 1 or group 2:

- The connected USB devices, microphones, and earphones can be connected to Host PC 1 or 2.
- When switching to group 1, the display connected to Monitor A and Monitor B will output video from HDMI In 1A and HDMI In 1B respectively. When switching to group 2, the display connected to Monitor A and Monitor B will output video from HDMI In 2A and HDMI In 2B respectively.

USB Mode

Switch the DIP switch to “USB” mode. Wiring as the following figure.

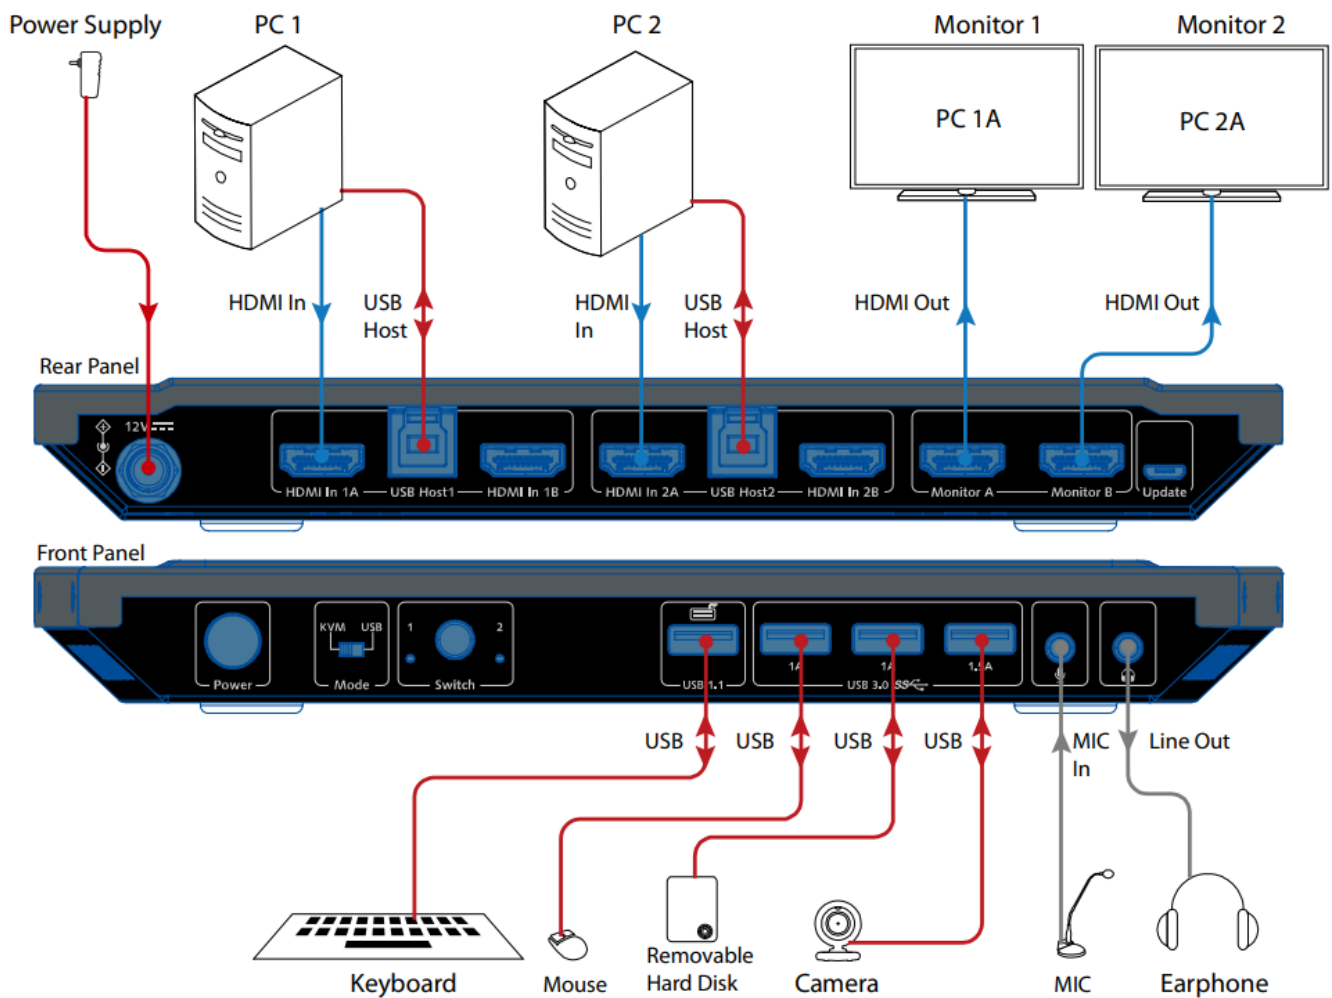

In this mode, when switching the input source to group 1 or group 2:


- The connected USB devices, microphones, and earphones can be connected to the Host PC 1 or 2.
- The displays connected to Monitor A and Monitor B will constantly output video from HDMI In 1A and HDMI In 2A respectively.

Control of the Switcher

You can choose to switch input sources at your convenience through the front panel button or Hotkey function.

Front Panel Control

Users can choose to use the front panel button to do basic switching operations. Connect the switcher as required and power on all the attached devices.

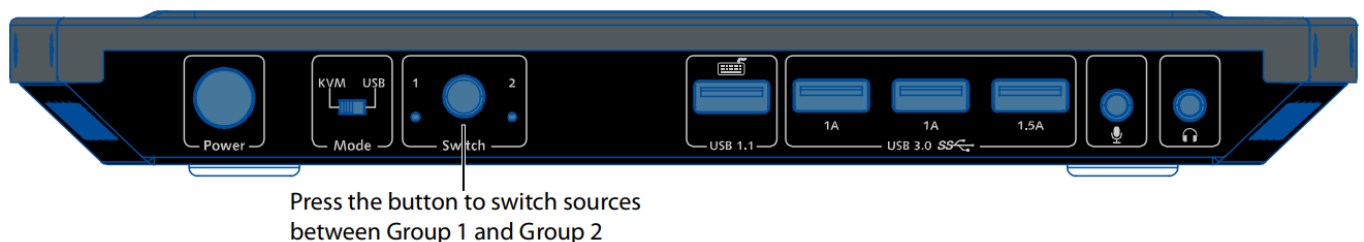

Hotkey Function

One USB 1.1 port on the rear panel of the switcher supports the keyboard Hotkey function.

Supported Hotkey:

1. Tab (default)
2. Left Ctrl
3. Right Ctrl
4. Caps Lock

Key Operation	Function
Press the "Hotkey" twice quickly	Switch to this hotkey.
Press "Hotkey" + "1"	Switch to input group 1.
Press "Hotkey" + "2"	Switch to input group 2.

Press "Hotkey" + "Left"	Switch to the previous input group (Cycle group 2->1).
Press "Hotkey" + "Right"	Switch to the next input group (Cycle group 1->2).

For example:

If you want to use the "Left Ctrl" as a hotkey, press the "Left Ctrl" key twice quickly to switch the hotkey to it, and other hotkeys are invalid. If you need to use other hotkeys, please repeat the above steps.

Specifications

Technical	
Video Signal	HDMI: HDMI with 4K@60Hz 4:4:4, HDCP 2.2
USB Data	USB 3.0, up to 5Gbps data transfer rate. With one high- the power of 5V/ 1.5A port included.
Input/Output Resolution Supported	SMPT E: 1280x720P1,2,3,4,5,6,7,8, 1920x1080I6,8, 1920x1080P1,2,3,4,5,6,7,8,9, 2560x10809, 3840x10809, 3840x21602, 3,5,6,8, 4096x21602,3,5,6,8 VESA: 800x6008, 1024x7688, 1280x7688, 1280x8008, 1280x9608, 1280x10248, 1360x7688, 1366x7688, 1400x10508, 1440x 9008, 1600x9008, 1600x12008, 1680x10508, 1920x12008, 2560x1440 10 1 = at 23.98 Hz, 2 = at 24 Hz, 3 = at 25 Hz, 4 = at 29.97 Hz, 5 = at 30 Hz, 6 = at 50 Hz, 7 = at 59.94 Hz, 8 = at 60 Hz, 9 = 120Hz, 10 = 144Hz
HDR Format Supported	All HDR formats, including HDR 10, HLG, HDR 10+, and Dolby Vision
Audio Format Supported	HDMI: Fully supports audio formats in HDMI 2.0 specification, including PCM 2.0/5.1/7.1, Dolby TrueHD, Dolby Atmos, DTS-HD Master Audio, a nd DTS:X MIC IN: Stereo LINE OUT: Stereo
Max Data Rate	18 Gbps

General	
Operating Temperature	0°C to + 45°C (32 to + 113 °F)
Storage Temperature	-20 to +70°C (-4 to + 158 °F)
Humidity	20% to 90%, non-condensing
Power Consumption (Maximum)	3.6W
Device Dimensions (W x H x D)	230mm x 26.2mm x 142.6mm/ 9.06" x 1.03" x 5.61"
Product Weight	0.83kg/1.83lbs

Transmission Distance

Cable	Range	Supported Video
HDMI	Input/Output: 5m/10ft	1080P@60Hz 24bpp 4K@30Hz 4:4:4 24bpp 4K@60Hz 4:2:0 24bpp
	Input/Output: 3m/10ft	4K@60Hz 4:4:4 24bpp

Trouble Shooting

Steps of Regular Troubleshooting Routine

1. Power: Please make sure all devices are powered on. (source, switcher, display devices).
2. Devices: Please make sure the picture can be shown normally when connecting the source to display devices directly.
3. Cable: Plug in and out the HDMI/USB cable or try another HDMI/USB cable.
4. Compatibility: Please test other sources and display devices to determine whether it is a compatibility issue.

Typical Questions:

1. Power: The switcher is not powered on.
Please ensure the power button on the front panel is pressed to turn on the switcher.
2. Video:
 - a. The video can't be switched.
Please ensure the switcher is set to KVM mode. If it is in USB mode, only the connected USB devices can be switched.
 - b. USB devices aren't connected to the input source currently displayed.
Please ensure USB Host and HDMI In ports in a group are connected to the same PC.
3. Hotkey: The hotkey function is disabled.
Please ensure the keyboard is connected to the USB port, especially for the keyboard (USB 1.1 port).

Warranty

Products are backed by limited 1-year parts and labor warranty. For the following cases, AV Access Technology Limited shall charge for the service(s) claimed for the product if the product is still remediable and the warranty card becomes unenforceable or inapplicable.

1. The original serial number (specified by AV Access Technology Limited) labeled on the product has been removed, erased, replaced, defaced or is illegible.
2. The warranty has expired.
3. The defects are caused by the fact that the product is repaired, dismantled, or altered by anyone that is not from an AV Access Technology Limited authorized service partner. The defects are caused by the fact that the product is used or handled improperly, roughly, or not as instructed in the applicable User Guide.
4. The defects are caused by any force majeure including but not limited to accidents, fire, earthquake, lightning, tsunami, and war.
5. The service, configuration, and gifts are promised by the salesman only but are not covered by the normal

contract.

6. AV Access Technology Limited reserves the right to interpretation of these cases above and to make changes to them at any time without notice.

Thank you for choosing products from AV Access.



Documents / Resources

	<p>AV Access 4KSW21-DM 2 x 1 Dual-Monitor KVM Switcher [pdf] User Manual</p> <p>4KSW21-DM 2 x 1 Dual-Monitor KVM Switcher, 4KSW21-DM, 2 x 1 Dual-Monitor KVM Switcher , KVM Switcher, Switcher</p>
	<p>AV Access 4KSW21-DM 2 x 1 Dual-Monitor KVM Switcher [pdf] User Manual</p> <p>4KSW21-DM, 2 x 1 Dual-Monitor KVM Switcher, KVM Switcher, 2 x 1 Dual-Monitor Switcher, Switcher, 4KSW21-DM Switcher</p>

References

- [AV Access | Quality & Budget Assured Pro AV Product Manufacturer](#)