

Av Access C10 KVM Switch Docking with Dual Monitor



Av Access C10 KVM Switch Docking with Dual Monitor User Manual

[Home](#) » [AV Access](#) » Av Access C10 KVM Switch Docking with Dual Monitor User Manual 

Contents

- [1 Av Access C10 KVM Switch Docking with Dual Monitor](#)
- [2 Specifications](#)
- [3 Product Usage Instructions](#)
- [4 Frequently Asked Questions](#)
- [5 Package Contents](#)
- [6 Features](#)
- [7 Panel](#)
- [8 Application](#)
- [9 Specification](#)
- [10 Troubleshooting](#)
- [11 Documents / Resources](#)
 - [11.1 References](#)



Av Access C10 KVM Switch Docking with Dual Monitor



Specifications

- Input: USB-C, HDMI, DP
- Output Resolution Support: 4K@60Hz, 1080P@240Hz/165Hz/144Hz/60Hz, 2560×1440@144Hz/120Hz/60Hz
- Audio Support: 5.1ch audio de-embedding
- Peripheral and Expansion Control: USB-C, USB 3.0, USB 2.0, TOSLINK, LAN, SDXC card slot, 3.5mm headphone jack
- Operating Temperature: Normal room temperature
- Storage Temperature: -20°C to 60°C
- Humidity: 10% to 90% non-condensing
- ESD Protection
- Power Supply: 20V/6A
- Power Consumption: 60W
- Dimensions (W x H x D): Specific dimensions
- Product Weight: Specific weight

Product Usage Instructions

Package Contents

Before starting the installation, ensure you have the following items in the package:

- Switch Docking x 1
- Power Adapter (20V/6A) x 1
- USB-C to USB-C cable (USB 3.2 Gen 2, 1m) x 1
- USB-A to USB-B cable (USB 3.0, 1.5m) x 1
- HDMI 2.0 cable (1.5m) x 1
- DP 1.2a cable (1.5m) x 1
- User Manual x 1

Frequently Asked Questions

Q: What should I do if the device doesn't work?

A: Follow these steps:

1. Check if the POWER LED is lit on the front panel.
2. Ensure you are using the provided 20V/6A power supply. Using an incompatible or insufficient power supply can damage the product.

Package Contents

Before you start the installation of the product, please check the package contents:

- Switch Docking x 1
- Power Adapter (20V/6A) x 1
- USB-C to USB-C cable (USB 3.2 Gen 2, 1m) x 1
- USB-A to USB-B cable (USB 3.0, 1.5m) x 1
- HDMI 2.0 cable (1.5m) x 1
- DP 1.2a cable (1.5m) x 1
- User Manual x 1


Features

- 2x1 KVM Switch Docking Station with Dual Monitor.
- Two 4K@60Hz outputs for dual monitors KVM application.
- 2x1 Switch with one USB-C for the laptop and one combined HDMI+DP+USB 3.0 for the desktop.
- One full-featured USB-C input supports 4K@60Hz video transmission, USB 3.0 data, and 60W charging.
- USB-C input supports DP MST mode with dual 4K@60Hz outputs.
- Supports high refresh rates such as 240Hz, 165Hz, and 144Hz. Support 1080P@240Hz/165Hz/144Hz/60Hz, 2560x1440@144Hz/120Hz/60Hz, 4K@60Hz and other resolutions.
- Support automatic wake-up function, which automatically wakes up the standby computer when switching.
- Supports multiple peripheral ports, including:
 - One USB-C port, support for USB-C (up to 5Gb/s, 1.5A power output).
 - Three USB 3.0 ports, support for USB-A (up to 5Gb/s, 1A power output).
 - Two USB 2.0 ports, support for USB-A (up to 480Mb/s).
 - One TOSLINK port, support 5.1ch audio de-embedding.
 - One LAN port, support for 1Gb Ethernet performance (For USB-C Laptop only).
 - One SDXC card slot.
 - One 3.5 mm headphone jack.
- No driver is required, plug and play.

Panel




1. USB 2.0 2. USB-C 3. 3.5mm headphone jack | 4. SDXC card slot 5. Power (LED) | 6. Input Channel (LED) | 7. Button (Switch)

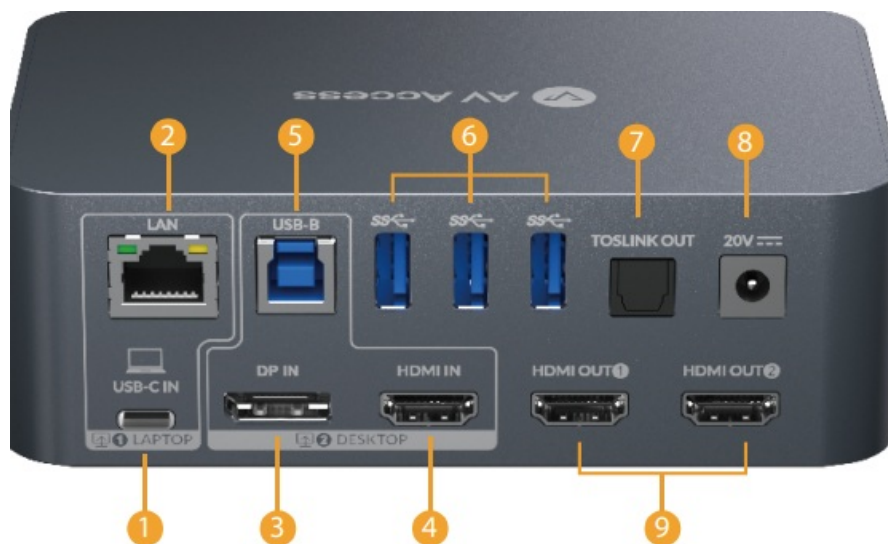

1. USB-C (Laptop) | 2. 1G LAN (Ethernet) | 3. DP IN | 4. HDMI IN | 5. USB-B (HOST) | 6. USB 3.0 (5Gb/s) | 7. TOSLINK OUT | 8. POWER IN | 9. HDMI OUT (Dual 4K)

Application

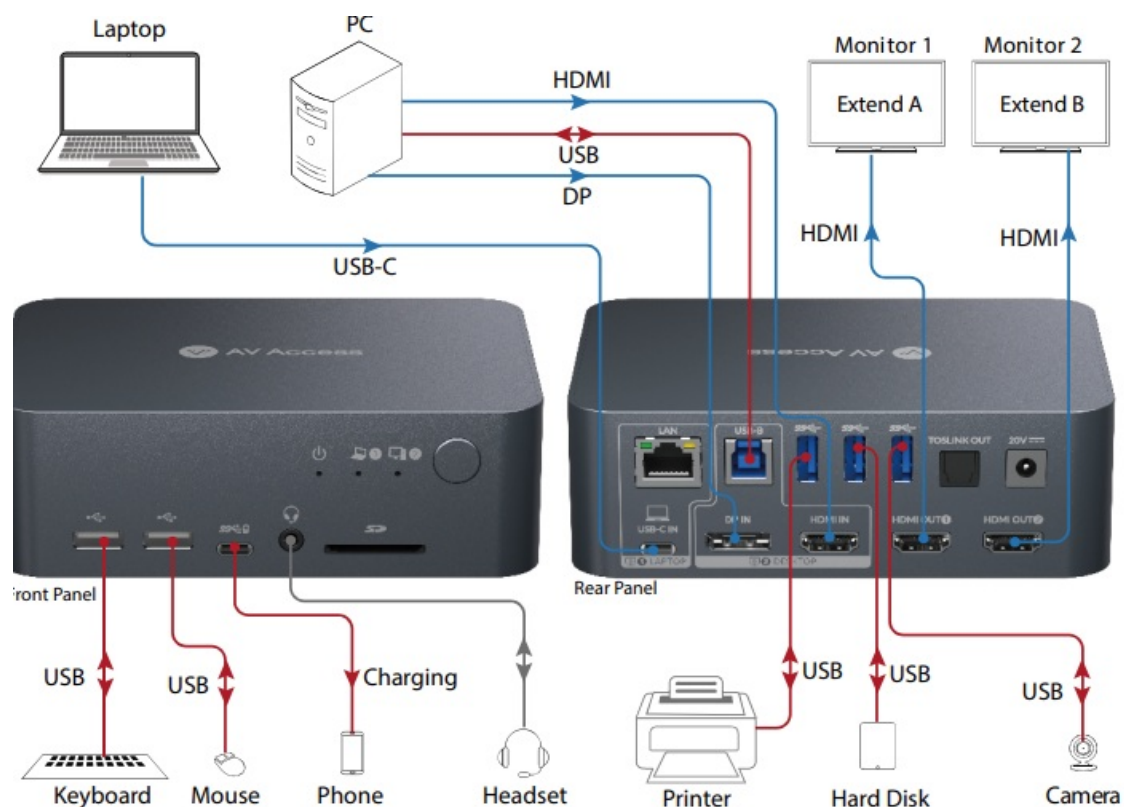

Note:

1. When select DESKTOP 2 group as input source, HDMI OUT 1 will output the signal from DP IN, and HDMI OUT 2 will output the signal from HDMI IN.
2. Only the laptop connected with USB-C IN port supports connecting to the ethernet the LAN port connected, the PC connected with DESKTOP 2 group doesn't support this function.
3. When the switcher is connected with two monitors, the TOSLINK OUT port outputs the de-embedded audio from HDMI OUT 1. When the switcher is connected with one monitor, the TOSLINK OUT port outputs the de-embedded audio from the connected monitor (HDMI OUT 1 or HDMI OUT 2).

Specification

Technical	
Input	Laptop: USB-C USB-C supports USB 3.2 Gen 2 standard, up to 20Gb/s, with support for: 60W Charging, USB 3.0 (up to 5Gb/s), and Dual 4K@60Hz video (MST)
	Desktop: DP + HDMI + USB-B DP port support for DP 1.2a (up to 4K@60Hz); HDMI port support for HDMI 2.0 (up to 4K@60Hz); USB-B port support for USB 3.0 (up to 5Gb/s).
Output	Two HDMI 2.0 outputs with HDCP 2.2
Resolution Support	USB-C: Up to two 4K@60Hz outputs DP IN/HDMI IN/OUT: 1080P@240Hz/165Hz/144Hz/60Hz, 2560×1440@144Hz/120Hz/60Hz, 4K@60Hz

Audio Support	DP/HDMI: Fully supports audio formats in DP 1.2a/HDMI 2.0 specification, including PCM 2.0/5.1/7.1, Dolby TrueHD, Dolby Atmos, DTS-HD Master Audio, and DTS:X TOSLINK: PCM 2.0/5.1, Dolby Digital, and DTS 5.1 Headphone: Stereo	
Peripheral and Expansion	USB-C x1: Up to 5Gb/s, 1.5A power output. USB-A x5: <ul style="list-style-type: none">Three USB 3.0 ports, up to 5Gb/s, and 1A power outputTwo USB 2.0 ports, up to 480Mb/s SDXC card: Up to 104MB/s, maximum support 2TB. LAN: RJ-45 connector, support for 1Gb Ethernet performance (For USB-C Laptop only)	
Control	Button Switch	
General		
Operating Temperature		0°C ~ 45°C (32°F to 113°F)
Storage Temperature		-20°C ~ 70°C (-4°F to 158°F)
Humidity		10% to 90%, non-condensing
ESD Protection		Human-body Model: ±8kV (Air-gap discharge)/±4kV (Contact discharge)
Power Supply		DC 20V/6A
Power Consumption		94.5W
Dimensions (W x H x D)		140mm x 47.5mm x 95mm/5.51" x 1.87" x 3.74"
Product Weight		0.86kg/1.90lbs

Troubleshooting

The device doesn't work?

1. Please check if the POWER LED is light on the front panel.
2. Please make sure to use the 20V/6A power supply provided in the accessories. An unsuitable or insufficient power supply may damage the product.

Do not show/output dual 4K videos simultaneously?

1. If used USB-C as input:
 - a. Please make sure to use the USB-C to USB-C cable provided in the accessories.
 - b. Please make sure to use the USB-C notebook that supports DP alt mode and DP MST mode.

- c. The latest Mac computer with an ARM processor can only support DP SST mode, so two duplicate contents will be displayed.
- d. Please use a laptop with a Windows operating system with a discrete graphics card. The Intel integrated graphics performance may be insufficient, resulting in unstable or flickering videos.
- e. For notebooks using GeForce RTX 20 series and above graphics cards, we recommend setting up two 4K@60Hz resolutions.
- f. For notebooks using GeForce GTX10 series graphics cards, we recommend setting up two 1080P@60Hz resolutions.
- g. For notebooks using other discrete graphics cards, adjust the resolutions according to the performance of the graphics card.

2. If used DP or HDMI as the input:

Please connect both DP and HDMI input ports at the same time, if only connect one of them, and there will be only one video output.



Wireless mouse and keyboard are not responsive?

USB-IF has confirmed that USB 3.0 will interfere with the 2.4G dongle receivers used by wireless mouse and keyboards. You can check whether a USB 3.0 device is connected next to the wireless dongle accessory. Please connect the USB 3.0 to an interface far away from the wireless dongle, such as the USB 3.0 interface on the rear panel.

Video flickering/unstable?

1. Please make sure to use the correct cable. Please use DP1.2a and above cables for DP, and HDMI 2.0 and above cables for HDMI.
2. For USB-C, please use the built-in cable or a USB-IF-certified cable that supports a USB 3.2 Gen 2 cable with the 10Gb/s data rate.

Documents / Resources

 	<p>Av Access C10 KVM Switch Docking with Dual Monitor [pdf] User Manual C10, C10 KVM Switch Docking with Dual Monitor, KVM Switch Docking with Dual Monitor, Switch Docking with Dual Monitor, Docking with Dual Monitor, Dual Monitor, Monitor</p>
---	---

References

- [User Manual](#)