

Azoula SR-ZG2833P Configurable Zigbee GP Switch



Azoula SR-ZG2833P Configurable Zigbee GP Switch User Guide

[Home](#) » [Azoula](#) » Azoula SR-ZG2833P Configurable Zigbee GP Switch User Guide 

Contents

- [1 Azoula SR-ZG2833P Configurable Zigbee GP Switch](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 FAQs](#)
- [5 Function Introduction](#)
- [6 Product Data](#)
- [7 Product Description](#)
- [8 Operations](#)
- [9 Wiring Diagram](#)
- [10 Installation](#)
- [11 Documents / Resources](#)
 - [11.1 References](#)



Azoula SR-ZG2833P Configurable Zigbee GP Switch



Product Information

• Specifications:

- **Switch Type:** Configurable Zigbee GP Switch
- **Transmission Range:** 10-30m (typical)
- **Radio Frequency:** 2.4GHz
- **Power Supply:** 3V (1xCR2430 battery)
- **Buttons:** 4
- **Dimensions:** 40x40x11.2mm
- **Operating Temperature:** -20°C to +45°C
- **Working Humidity:** 10% to 95% RH non-condensing
- **Waterproof Grade:** IP20
- **Warranty:** 5 years

Product Usage Instructions

• Product Description:

- The Zigbee push-button coupler is a 4-channel push-button interface for simple wall/flush type box installation.
- It can be used with existing switches and communicates with a compatible Zigbee hub.
- The switch is powered by a CR2430 battery and sends wireless signals to control the Zigbee system.

• Add the Switch to a Compatible Zigbee Hub

- Tap on the + button on the Home page.
- Tap on Zigbee-Green Power to add the Green Power switch.
- Tap on Switch (Key 4) and then tap on Start to add the 4-key Green Power switch.


- Follow the App instructions to operate the switch and add it to the App.
- Once added successfully, tap on Done to finish adding.
- The added switch will be displayed on the Home Page.
- **Configure the Switch through a Compatible Zigbee Hub**
 - After adding the switch to the hub, navigate to the Smart Page of the Azoula Smart App to set Automation using the switch.
 - Refer to the user manual of the Azoula Smart Hub for more information on setting automation.



FAQs

- **Q: What type of battery does the switch use?**
 - **A:** The switch uses a CR2430 battery.
- **Q: How many buttons does the switch have?**
 - **A:** The switch has 4 buttons for different actions.
- **Q: What is the warranty period for the switch?**
 - **A:** The switch comes with a 5-year warranty.

Important: Read All Instructions Before Installation

Function Introduction

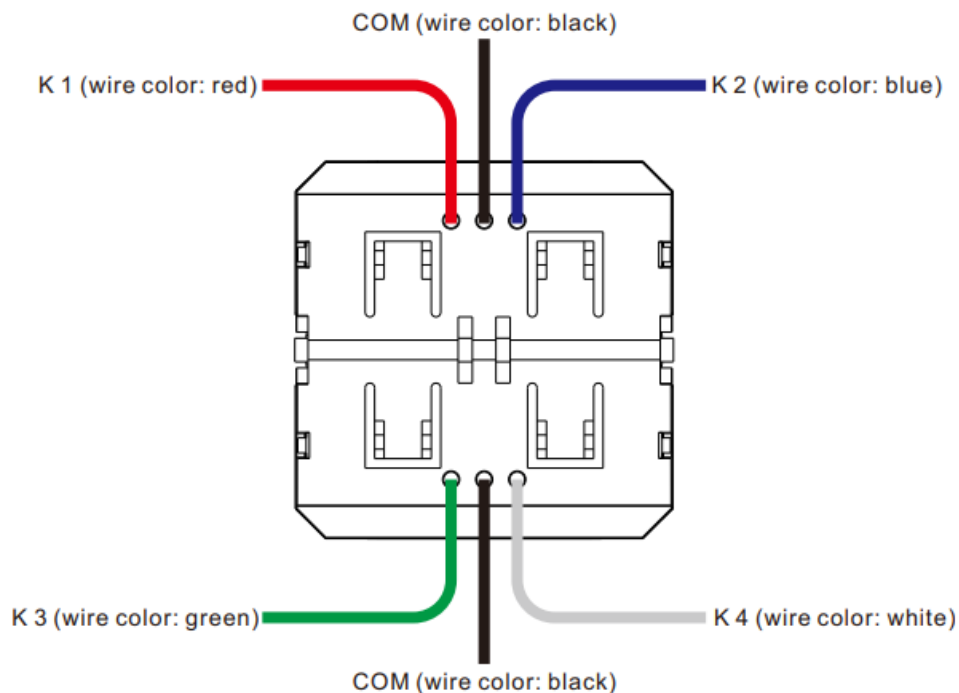

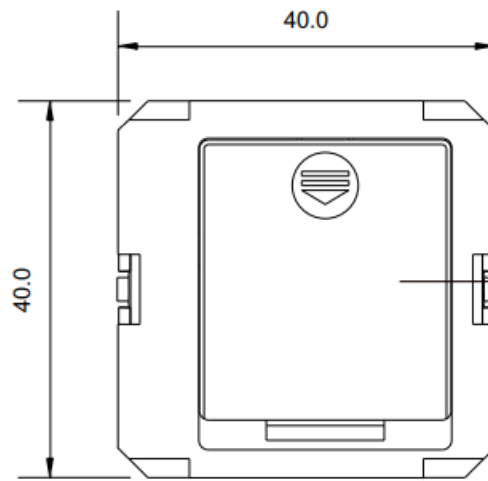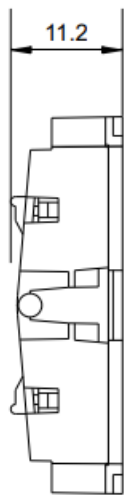

Battery: CR2430
Before the first use, please open the battery cover and remove the protective film

Back side

Product Data

Switch Type	Configurable Zigbee GP Switch
Transmission Range	10-30m (typical)
Radio Frequency	2.4GHz
Power Supply	3V(1xCR2430 battery)
Buttons	4
Dimensions	40x40x11.2mm
Operating Temperature	-20 °C ~ +45°C
Working Humidity	10% ~ 95% RH non-condensing
Waterproof Grade	IP20
Warranty	5 years

Product Description

- The Zigbee push-button coupler is a 4-channel push-button interface for simple wall/flush type box installation.
- You can continue to use existing switches, irrespective of the manufacturer.
- It is a wireless transmitter that communicates with a compatible Zigbee hub. The coupler adopts a CR2430 battery to power a built-in transmitter.
- This transmitter sends wireless radio signals that are used to remotely control the compatible Zigbee system.
- The switch can be configured through the Zigbee App after being added to the Zigbee hub.
- This switch has four buttons to trigger different actions of designated devices or zones with 3 events: short press, double click, and long press.
- The action of each event and the controlled object of each button can be configured through the Zigbee App.


Safety & Warnings

- This device contains a button lithium battery that shall be stored and disposed of properly.

- DO NOT expose the device to moisture.

Corresponding button position of the 4 push buttons while commissioning using Azoula Smart App Push button wiring as follows:


- Push Button 1 connecting to terminal K1
- Push Button 2 connecting to terminal K2
- Push Button 3 connecting to terminal K3
- Push Button 4 connecting to terminal K4

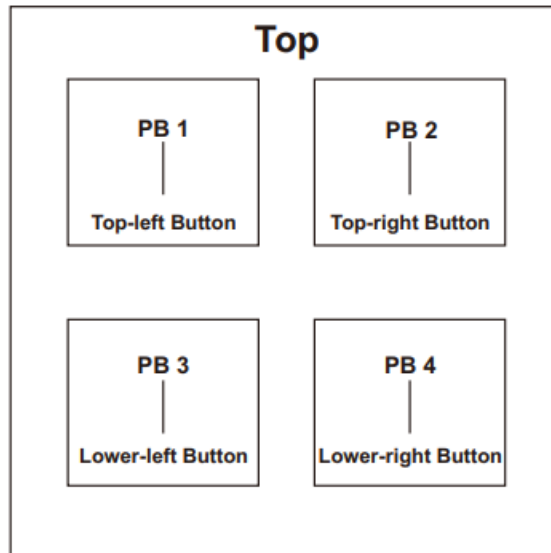




Operations

1. Add the Switch to a Compatible Zigbee Hub (For instance Azoula Smart Hub and Azoula Smart App)


- **Step 1:** tap on the “+” button on the “Home” page, then tap on “Zigbee-Green Power” to add Green Power switch.

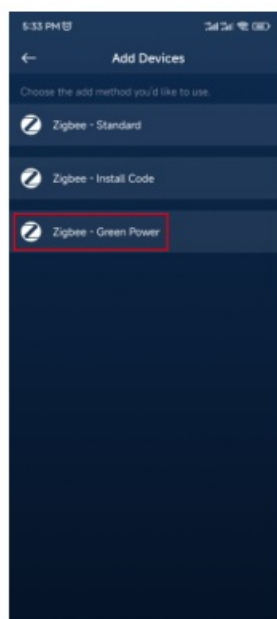

- **Step 2:** tap on “Switch (Key 4)”, then tap on the “Start” button to add a 4 key Green Power switch.
- **Step 3:** Follow the instructions of the App to operate the switch and add it to the App.

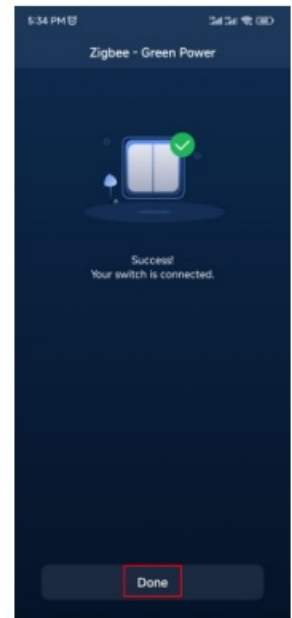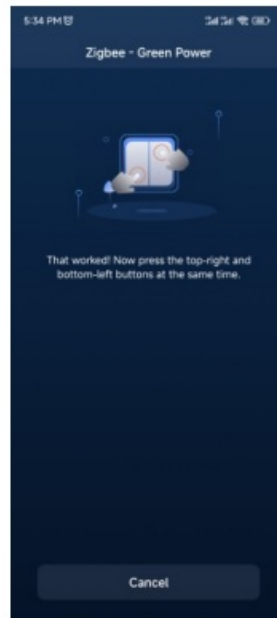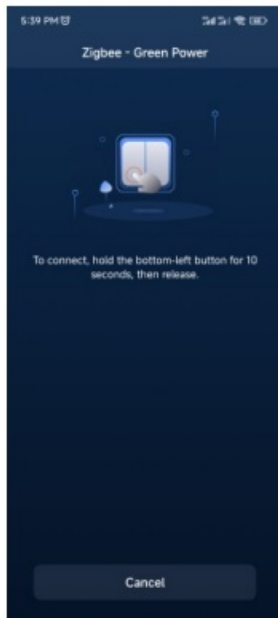


- **Step 4:** Once added successfully, tap on the “Done” button to finish adding.

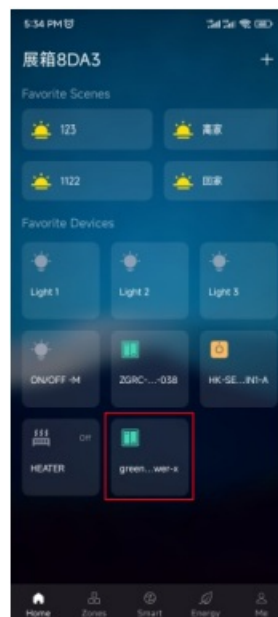

- **Step 5:** The added switch will be shown on the “Home” Page.
2. Configure the switch through a Compatible Zigbee Hub (For instance Azoula Smart Hub and Azoula Smart App)
 - After the switch is added to the hub, navigate to the “Smart” Page of the Azoula Smart App and you can use the switch to set “Automation”.
 - Please refer to the user manual of Azoula Smart Hub to learn how to set automation using a green power switch.

Wiring Diagram

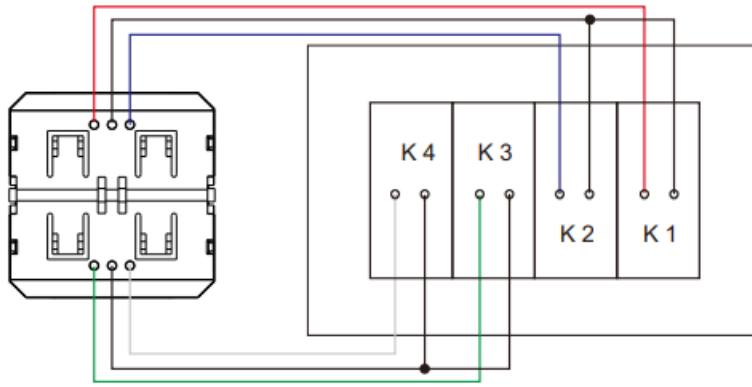

Installation

The key part of this controller is a universal, extremely rotary standard switch element that can be integrated into numerous frames by different manufacturers as below list:

BERKER	S1, B1, B3, B7 glass
GIRA	Standard55, E2, Event, Esprit
JUNG	A500, Aplus
MERTEN	M-smart, M-Arc, M-Plan

Documents / Resources

	Azoula SR-ZG2833P Configurable Zigbee GP Switch [pdf] User Guide SR-ZG2833P Configurable Zigbee GP Switch, SR-ZG2833P, Configurable Zigbee GP Switch, Zigbee GP Switch, GP Switch
--	--

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.