



behringer Q1202USB Premium 5 Input 2 Bus Mixer User Guide

[Home](#) » [Behringer](#) » behringer Q1202USB Premium 5 Input 2 Bus Mixer User Guide 

behringer Q1202USB Premium 5 Input 2 Bus Mixer User Guide



Contents

- [1 Important Safety Instruction](#)
- [2 Important information](#)
- [3 FEDERAL COMMUNICATIONS COMMISSION COMPLIANCE INFORMATION](#)
- [4 Documents / Resources](#)
- [5 Related Posts](#)

Important Safety Instruction



CAUTION RISK OF ELECTRIC SHOCK DO NOT OPEN



ATTENTION RISQUE D'ELECTROCUTION! NE PAS OUVRIR



Terminals marked with this symbol carry electrical current of sufficient magnitude to constitute risk of electric shock. Use only high-quality professional speaker cables with ¼" TS or twist-locking plugs pre-installed. All other installation or modification should be performed only by qualified personnel.



This symbol, wherever it appears, alerts you to the presence of uninsulated dangerous voltage inside the enclosure – voltage that may be sufficient to constitute a risk of shock.



This symbol, wherever it appears, alerts you to important operating and maintenance instructions in the accompanying literature. Please read the manual.



Caution

To reduce the risk of electric shock, do not remove the top cover (or the rear section). No user serviceable parts inside. Refer servicing to qualified personnel.



Caution

To reduce the risk of fire or electric shock, do not expose this appliance to rain and moisture. The apparatus shall not be exposed to dripping or splashing liquids and no objects filled with liquids, such as vases, shall be placed on the apparatus.



Caution

These service instructions are for use by qualified service personnel only. To reduce the risk of electric shock do not perform any servicing other than that contained in the operation instructions. Repairs have to be performed by qualified service personnel

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not use this apparatus near water.
6. Clean only with dry cloth.
7. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
9. Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding-type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
10. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
11. Use only attachments/accessories specified by the manufacturer.
12. Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the

apparatus. combination to avoid injury from tip-over.



13. Unplug this apparatus during lightning storms or when unused for long periods of time.



14. ■ Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
15. The apparatus shall be connected to a MAINS socket outlet with a protective earthing connection.
16. Where the MAINS plug or an appliance coupler is used as the disconnect device, the disconnect device shall remain readily operable.
17. Correct disposal of this product: This symbol indicates that this product must not be disposed of with household waste, according to the WEEE Directive (2012/19/EU) and your national law. This product should be taken to a collection center licensed for the recycling of waste electrical and electronic equipment (EEE). The mishandling of this type of waste could have a possible negative impact on the environment and human health due to potentially hazardous substances that are generally associated with EEE. At the same time, your cooperation in the correct disposal of this product will contribute to the efficient use of natural resources. For more information about where you can take your waste equipment for recycling, please contact your local city office, or your household waste collection service.
18. Do not install in a confined space, such as a book case or similar unit.
19. Do not place naked flame sources, such as lighted candles, on the apparatus.
20. Please keep the environmental aspects of battery disposal in mind. Batteries must be disposed-of at a battery collection point.
21. This apparatus may be used in tropical and moderate climates up to 45°C.

LEGAL DISCLAIMER

Music Tribe accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph, or statement contained herein. Technical specifications, appearances and other information are subject to change without notice. All trademarks are the property of their respective owners. Midas, Klark Teknik, Lab Gruppen, Lake, Tannoy, Turbosound, TC Electronic, TC Helicon, Behringer, Bugera, Aston Microphones and Coolaudio are trademarks or registered trademarks of Music Tribe Global Brands Ltd. © Music Tribe Global Brands Ltd. 2023 All rights reserved.


LIMITED WARRANTY

For the applicable warranty terms and conditions and additional information regarding Music Tribe's Limited Warranty, please see complete details online at community.[musictribe.com/pages/support#warranty](https://community.musictribe.com/pages/support#warranty).


XENYX Q1202USB/Q1002USB/Q802USB/Q502USB Hook-up

Step 1: Hook-Up


Live Performance

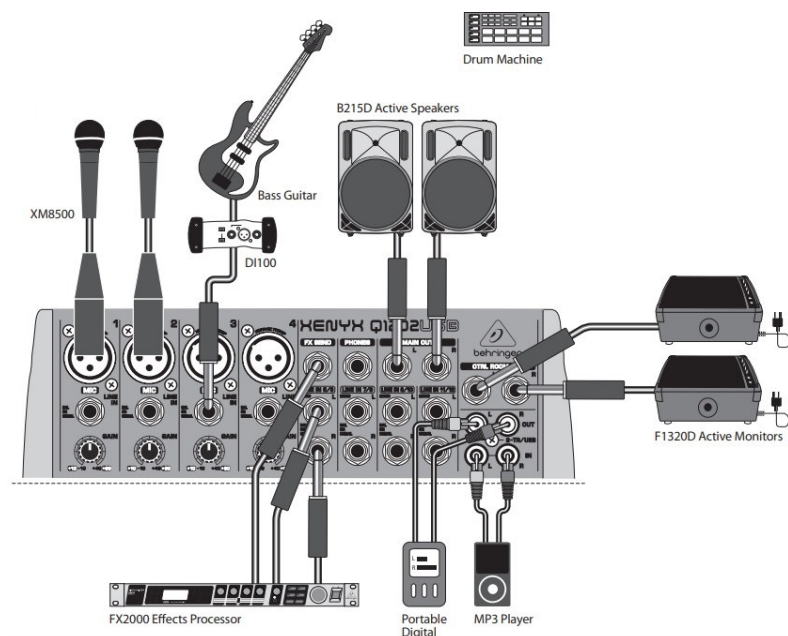


Home Studio

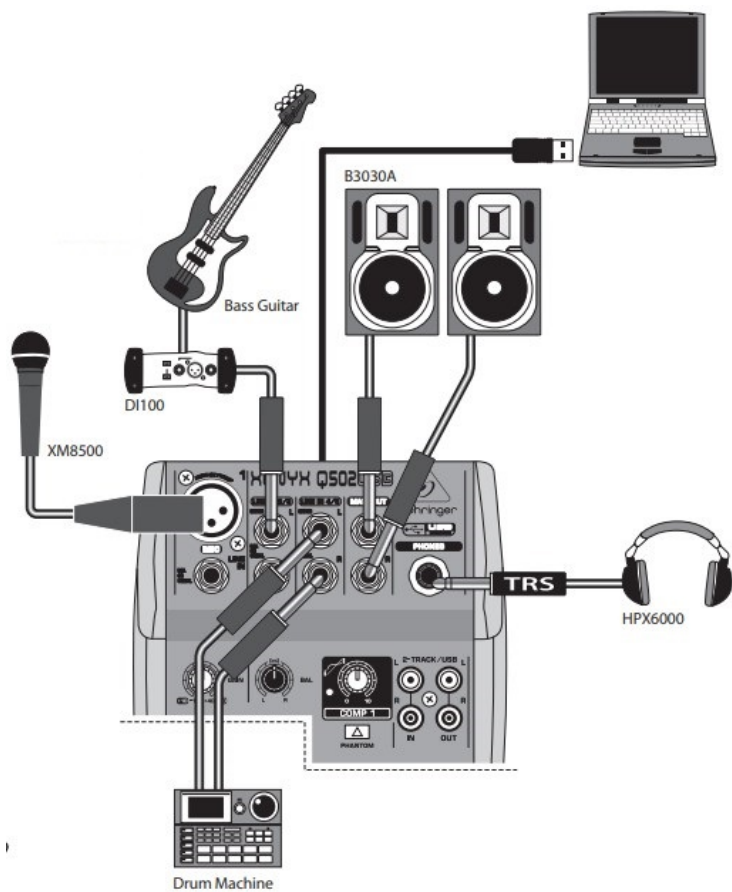

Recording Studio

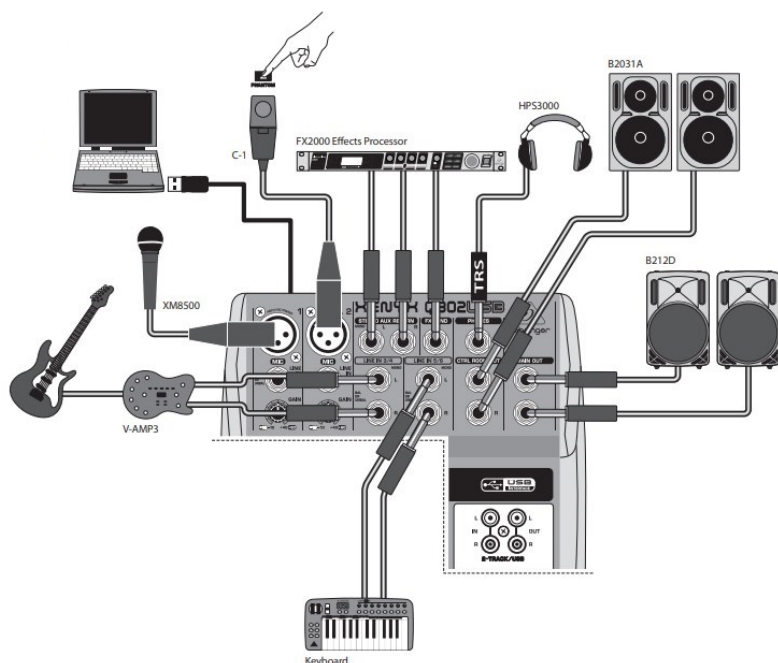

XENYX Q1202USB/Q1002USB/Q802USB/Q502USB Controls

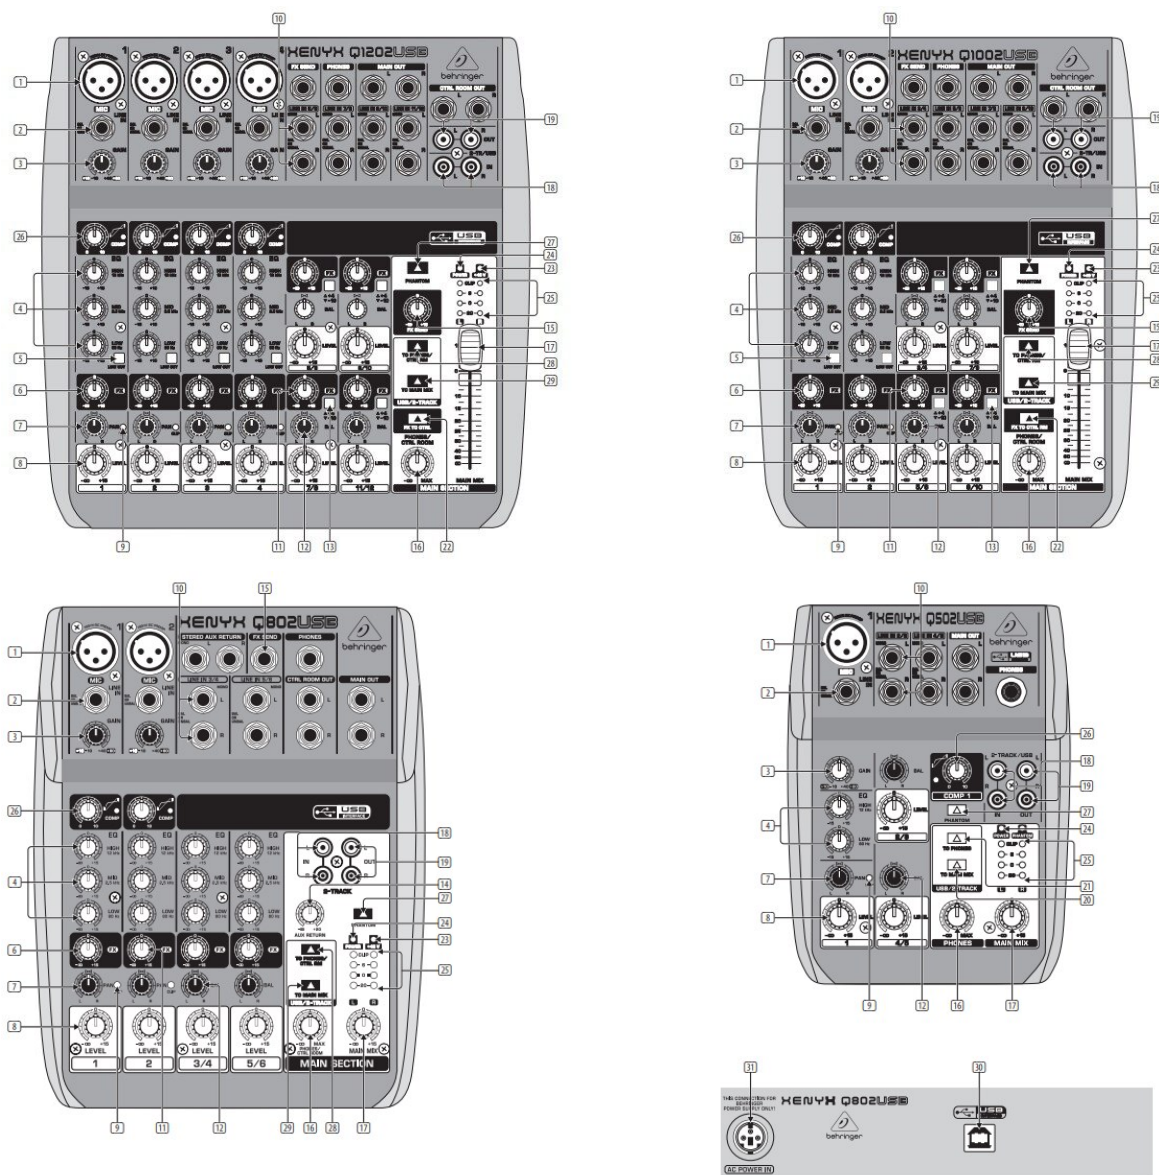

Step 2: Controls

This chapter describes the various control elements of your mixing console. All controls, switches and connectors will be discussed in detail.

1. **MIC** – Each mono input channel offers a balanced microphone input via the XLR connector and also features switchable +48/+15 V phantom power supply for condenser microphones. The XENYX preamps provide undistorted and noise-free gain as is typically known only from costly outboard preamps.
2. **LINE IN** – Each mono input also features a balanced line input on a 1/4" connector. Unbalanced devices (mono jacks) can also be connected to these inputs. Please remember that you can only use either the microphone or the line input of a channel at any one time. You can never use both simultaneously!
3. **GAIN** – Use the GAIN control to adjust the input gain. This control should always be turned fully counterclockwise whenever you connect or disconnect a signal source to one of the inputs.
4. **EQUALIZER** – All mono input channels include a 3-band equalizer, except for the Q502USB, which is equipped with a 2-band EQ. All bands provide boost or cut of up to 15 dB. In the central position, the equalizer is inactive.
5. **LOW CUT** – In addition, the mono channels (Q1002USB and Q1202USB) are equipped with a steep LOW CUT filter (slope at 18 dB/ oct., -3 dB at 75 Hz) designed to eliminate unwanted low-frequency signal components.
6. **FX (Q802USB/Q1002USB/Q1202USB only)**
 - FX sends (or AUX sends) enable you to feed signals via a variable control from one or more channels and sum these signals to a bus. The bus appears at the console's FX send output and can be fed from there to an external effects device. The return from the effects unit is then brought back into the console on the aux return connectors (Q802USB) or normal channel inputs. Each FX send is mono and features up to +15 dB gain.
7. **PAN** – The PAN control determines the position of the channel signal within the stereo image. This control features a constant-power characteristic, which means the signal is always maintained at a constant level, irrespective of position in the stereo panorama.
8. **LEVEL** – The LEVEL control determines the level of the channel signal in the main mix.
9. **CLIP** – The CLIP LED's of the mono channels illuminate when the input signal is driven too high, which could cause distortion. If this happens, use the GAIN control to reduce the preamp level until the LED does not light anymore.
10. **LINE IN** – Each stereo channel has two balanced line level inputs on 1/4" jacks for left and right channels. If only the jack marked "L" (left) is used, the channel operates in mono. The stereo channels are designed to handle typical line level signals. Both inputs will also accept unbalanced jacks.
11. **FX** – The FX sends of the stereo channels function similar to those of the mono channels. However, since the FX send buses are both mono, a mono sum is first taken from the stereo input before it is sent to the FX bus. The Q502USB is not equipped with FXsends.
12. **BAL** – The BAL(ANCE) control determines the levels of left and right input signals relative to each other before both signals are then routed to the main stereo mix bus. If a channel is operated in mono via the left line input, this control has the same function as the PAN control used in the mono channels.
13. **+4/-10** – The stereo inputs of the XENYX Q1002USB and Q1202USB have an input sensitivity switch which selects between +4 dBu and -10 dBV. At -10 dBV (home-recording level), the input is more sensitive (requires less level to drive it) than at +4 dBu (studio level).
14. **STEREO AUX RETURN** – Q802USB only: the STEREO AUX RETURN connectors are used to bring the output of the external effects device (whose input is derived from the aux sends) back into the console. You can instead use these connectors as additional inputs, but any effects device will then have to be brought back into

the console via a normal stereo channel. This does, however, give you the ability to use the channel EQ on the effects return signal if you wish. If only the left connector is used, the AUX RETURN automatically operates in mono. Use the AUX **RETURN control to determine how much of the effects signal is sent to the main mix.**

15. **FX SEND** – The FX SEND output (does not apply for Q502USB) should be connected to the input of an external effects unit. The post-fader FX signal you created using the input channel FX controls is sent to the effects unit via the FX SEND output. Use the FX SEND control of the main section to adjust the overall send level (Q1002USB and Q1202USB only)
16. **PHONES/CTRL ROOM** – The stereo PHONES jack (at the top of the connector panel) is where you connect headphones. The unbalanced CTRL ROOM OUT jacks carry the summed effects and main mix signals, as well as soloed channel signals. The PHONES/CTRL ROOM control adjusts the level of both headphones and main monitor outputs. The Q502USB is not equipped with control room outputs.
17. **MAIN MIX** – The MAIN OUT connectors are unbalanced mono jacks. The main mix signal appears here at a level of 0 dBu. The MAIN MIX fader adjusts the volume of these outputs. The XENYX Q802USB and Q502USB mixing consoles feature a rotary control for this purpose.
18. **2-TRACK INPUT** – The 2-TRACK INPUTs are used to bring an external signal source (e.g. CD player, tape deck, etc.) into the console. They can also be used as a standard stereo line input, so the output of a second XENYX or BEHRINGER ULTRALINK PRO MX882 can be connected.
19. **2-TRACK OUTPUT** – These connectors are wired in parallel with the MAIN OUT and carry the main mix signal (unbalanced). Connect the 2-TRACK OUTPUT to the inputs of your recording device. The output level is adjusted via the high-precision MAIN MIX fader or rotary control (Q802USB/Q502USB).
20. **USB/2-TR to MAIN** – When pressed, this button sends the audio from the USB and 2-TRACK inputs to the main mix (Q502USB only).
21. **USB/2-TR to PHONES** – When pressed, this button sends the audio from the USB and 2-TRACK inputs to the PHONES jack (Q502USB only).
22. **FX TO CTRL ROOM** – If you want to monitor only the FX send signal in your headphones or monitor speaker(s), press the FX TO CTRL switch. This mutes the main mix signal while routing the FX SEND output to the monitor(s). The XENYX Q802USB and Q502USB do not feature this switch.
23. **+48 V** – The red +48 V LED lights up when phantom power is on. The PHANTOM switch activates the phantom power supply on the XLR connectors of all mono channels.
24. **POWER** – The POWER LED indicates that the console is powered on.
25. **LEVEL INDICATOR** – The high-precision -segment display accurately displays the relevant signal level.
26. **COMP** – This knob adjusts the amount of compression effect on the channel.
27. **PHANTOM** – Press this knob to send +48 V of phantom power to the XLR inputs for use with condenser microphones. The Q502USB supplies +15 V of phantom power.
28. **USB/2-TR TO PHONES/CTRL RM** – button routes USB/2-Track playback to PHONES/CTRL ROOM.
29. **USB/2-TR TO MAIN MIX** – button routes USB/2-Track playback to MAIN MIX and mutes the 2-TR OUT/USB recording signal.
30. **USB CONNECTOR** – Connect your mixer to a computer using a standard USB cable.
31. **AC POWER IN** – Connect the included power cable here.



The mixer cannot be bus-powered via USB. Always use the included power adapter to supply power to the mixer.

Step 3: Level Setting

To correctly set the gains of the channels, first set the LEVEL controls of the input channels to their center positions (0 dB). Then use the GAIN controls to increase the input amplification until signal peaks show 0 dB on the level meter.

When recording to digital recorders, the recorder's peak meter should not go into overload. While analog recorders can be overloaded to some extent, creating only a certain amount of distortion (which is common and often desirable), digital recorders distort quickly when overloaded. In addition, digital distortion is not only undesirable, but also renders your recording completely useless. The peak meters of your XENYX display the level virtually independent of frequency. A recording level of 0 dB is recommended for all signal types.

Q1202USB **Q1002USB** **Q802USB** **Q502USB**

Microphone Inputs	
Type	XLR connector, balanced, discrete input circuit
Microphone Inputs	
@ 0 Ω Source resistance	-134 dB / 136 dB A-weighted
@ 50 Ω Source resistance	-131 dB / 133 dB A-weighted
@ 150 Ω Source resistance	-129 dB / 131 dB A-weighted
Frequency Response (-1 db)	<10 Hz-150 kHz (-1 db)
Frequency Response (-3 db)	<10 Hz-200 kHz (-3 db)
Gain range	+10 dB to +60 dB
Max. input level	+12 dBu @ +10 dB Gain
Impedance	1.9 k Ω balanced 1.9 k Ω balanced 1.9 k Ω balanced 1.4 k Ω balanced
Signal-to-noise ratio	110 dB A-weighted (0 dBu In @ +22 dB Gain)
Distortion (THD+N)	0.005% / 0.004% A-weighted
Line Inputs	
Type	1/4" TRS connector, balanced
Impedance	20 k Ω balanced, 10 k Ω unbalanced
Gain range	-10 dB to +40 dB
Max. input level	+22 dBu @ 0 dB Gain
Stereo Inputs	
Type	2 x 1/4" TRS connectors, balanced
Impedance	20 k Ω balanced, 10 k Ω unbalanced
Gain range	-20 dB to + 20 dB
Max. input level	B Max. input level +
CD/Tape Inputs	
Type	RCA connector
Impedance	18 k Ω
Max. input level	+22 dBu

Equalizer	
Low	80 Hz / ± 15 dB
Mid	2.5 kHz / ± 15 dB
High	12 kHz / ± 15 dB
Aux Sends	
Type	1/4" TRS connector, balanced
Impedance	120 Ω
Max. output level	+22 dBu
Aux Returns	
Type	1/4" TRS connector, balanced
Impedance	20 k Ω balanced / 10 k Ω unbalanced
Max. input level	+22 dBu

Q1202USB Q1002USB Q802USB Q502USB

Main Outputs				
Type	¼" TRS connector, balanced			
Impedance	120 Ω balanced			
Max. output level	+22 dBu			
Control Room Outputs				
Type	¼" TRS connector, balanced			
Impedance	approx. 120 Ω			
Max. output level	+22 dBu			
Phones Output				
Type	¼" TRS connector, unbalanced			
Max. output level	+21 dBu / 150 Ω (+25 dBm)			
CD/Tape Outputs				
Type	RCA connector, unbalanced			
Impedance	1 kΩ			
Max. output level	+22 dBu			
Main Mix System Data (Noise)				
Main mix @ -∞, channel fader @ -∞	-106 dB / -109 dB A-weighted			
Main mix @ 0 dB, channel fader @ -∞	-93 dB / -96 dB A-weighted	-93 dB / -96 dB A-weighted	-92 dB / -95 dB A-weighted	-95 dB / -98 dB A-weighted
Main mix @ 0 dB, channel fader @ 0 dB	-84 dB / -87 dB A-weighted			

USA/Canada			120 V—, 60 Hz		
Adapter	MX115	I	MXUL3 I MXUL3		MXUL3
Europe/AL/KJ/Australia			230 V—, 50 Hz		
Adapter	MXEU5		MXEU3 I MXEU3	1	MXEU3
China			220 V-1 50 Hz		
Adapter	MXCCC5	I	MXCCC3 I MXCCC3	I	MXCCC3
Korea			220 V—, 60 Hz		
Adapter	MXKR5		MXKR3 I MXKR3		MXKR3
Japan			100V-1 50/60 Hz		

USB

Connector	Type B			
Sample Rate	48 kHz			
Physical/Weight				
Dimensions (W x D x H)	92x9.8x2.0* 250x248x 50mm	7.7x 9.8 x 2.0" 195x248x 50 nwn	7.7 x 9.8 x 2.0" 195 x 248x 50mm	5.4 x 7.2 x1.8" 138x 184x 46mm
Weight (Net)	33lbs/ 1.5 kg	2.4 lbs / 1.1 kg	2.4lbs/ 1.1 kg	131bs / 0.6 kg

Important information

1. Register online. Please register your new MusicTribe equipment right after you purchase it by visiting musictribe.com. Registering your purchase using our simple online form helps us to process your repair claims more quickly and efficiently. Also, read the terms and conditions of our warranty, if applicable.
2. Malfunction. Should your MusicTribe Authorized Reseller not be located in your vicinity, you may contact the MusicTribe Authorized Fulfiller for your country listed under "Support" at musictribe.com. Should your country not be listed, please check if your problem can be dealt with by our "Online Support" which may also be found under "Support" at musictribe.com. Alternatively, please submit an online warranty claim at musictribe.com BEFORE returning the product.
3. Power Connections. Before plugging the unit into a power socket, please make sure you are using the correct mains voltage for your particular model. Faulty fuses must be replaced with fuses of the same type and rating without exception.

FEDERAL COMMUNICATIONS COMMISSION COMPLIANCEB INFORMATION

Behringer

XENYX

Q1202USB/Q1002USB/Q802USB/Q502USB

'Responsible Party Name: Music Tribe Commercial NV Inc.

Address: 122 E. 42nd St.1,

8th Floor NY, NY 10168,

United States

Email Address: legal@musictribe.com

XENYX

Q1202USB/Q1002USB/Q802USB/Q502USB

This equipment has been tested and found to comply with the limits for a Class B Ndigital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may causeharmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

This equipment complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation

Important information:

Changes or modifications to the equipment not expressly approved by Music Tribe Bcan void the user's authority to use the equipment.

Hereby, Music Tribe declares that this product is in compliance with Directive 2014/35/EU, Directive 2014/30/EU, Directive 2011/65/EU and Amendment 2015/863/EU, Directive 2012/19/EU, Regulation 519/2012 REACH SVHC and Directive 1907/2006/EC.

Full text of EU DoC is available at <https://community.musictribe.com/>


EU Representative: Music Tribe Brands DK A/S

Address: Gammel Strand 44, DK-1202 København K, Denmark

UK Representative: Music Tribe Brands UK Ltd.

Address: 8th Floor, 20 Farringdon Street London EC4A 4AB, United Kingdom

Documents / Resources

 <p>QUICK START GUIDE</p> <p>BEHRINGER</p> <p>Q1202USB Premium 5 Input 2 Bus Mixer</p>	<p>behringer Q1202USB Premium 5 Input 2 Bus Mixer [pdf] User Guide</p> <p>Q1202USB, Q1002USB, Q802USB, Q502USB, Q1202USB Premium 5 Input 2 Bus Mixer, Premium 5 Input 2 Bus Mixer, 5 Input 2 Bus Mixer, 2 Bus Mixer, Mixer</p>
---	--