



## Contents [ [hide](#) ]

- [1 Beijer Electronics GT-22CA Digital Output Module](#)
- [2 About This Manual](#)
- [3 Safety](#)
- [4 About the G-series System](#)
- [5 Specifications](#)
- [6 Dimensions](#)
- [7 Wiring Diagram](#)
- [8 LED Indicator](#)
- [9 Mapping Data Into the Image Value](#)
- [10 8. Parameter Data](#)
- [11 Hardware Setup](#)
- [12 FAQ](#)
- [13 Documents / Resources](#)
  - [13.1 References](#)

# Beijer

## Beijer Electronics GT-22CA Digital Output Module



## Specifications

- Model: GT-22CA Digital Output Module
- Channels: 32
- Voltage: 24 VDC
- Current: 0.3 A
- Source Type: Source
- Connector Type: 40 pt connector

## About This Manual

This manual contains information on the software and hardware features of the Beijer Electronics GT-22CA Digital Output Module. It provides in-depth specifications, guidance on installation, setup, and usage of the product.

## Symbols Used in This Manual

This publication includes Warning, Caution, Note and Important icons where appropriate, to point out safety-related, or other important information. The corresponding symbols should be interpreted as follows:



### **WARNING**

The Warning icon indicates a potentially hazardous situation which, if not avoided, could result in death or serious injury, and major damage to the product.



### **CAUTION**

The Caution icon indicates a potentially hazardous situation which, if not avoided, could result in minor or moderate injury, and moderate damage to the product.



### **NOTE**

The Note icon alerts the reader to relevant facts and conditions.



### **IMPORTANT**

The Important icon highlights important information.

## **Safety**

Before using this product, please read this manual and other relevant manuals carefully.

Pay full attention to safety instructions!

In no event will Beijer Electronics be responsible or liable for damages resulting from the use of this product.

The images, examples and diagrams in this manual are included for illustrative purposes. Because of the many variables and requirements associated with any particular installation, Beijer Electronics cannot take responsibility or liability for actual use based on the examples and diagrams.

## **Product Certifications**

The product has the following product certifications.



## **General Safety Requirements**


### **WARNING**

- Do not assemble the products and wires with power connected to the system. Doing so cause an “arc flash”, which can result in unexpected dangerous events (burns, fire, flying objects, blast pressure, sound blast, heat).
- Do not touch terminal blocks or IO modules when the system is running. Doing so may cause electric shock, short circuit or malfunction of the device.
- Never let external metallic objects touch the product when the system is running. Doing so may cause electric shock, short circuit or malfunction of the device.
- Do not place the product near inflammable material. Doing so may cause a fire.
- All wiring work should be performed by an electrical engineer.
- When handling the modules, ensure that all persons, the workplace and the packing are well grounded. Avoid touching conductive components, the modules contain electronic components that may be destroyed by electrostatic discharge.

### **CAUTION**

- Never use the product in environments with temperature over 60°C. Avoid placing the product in direct sunlight.
- Never use the product in environments with over 90% humidity.
- Always use the product in environments with pollution degree 1 or 2.
- Use standard cables for wiring.

## **About the G-series System**

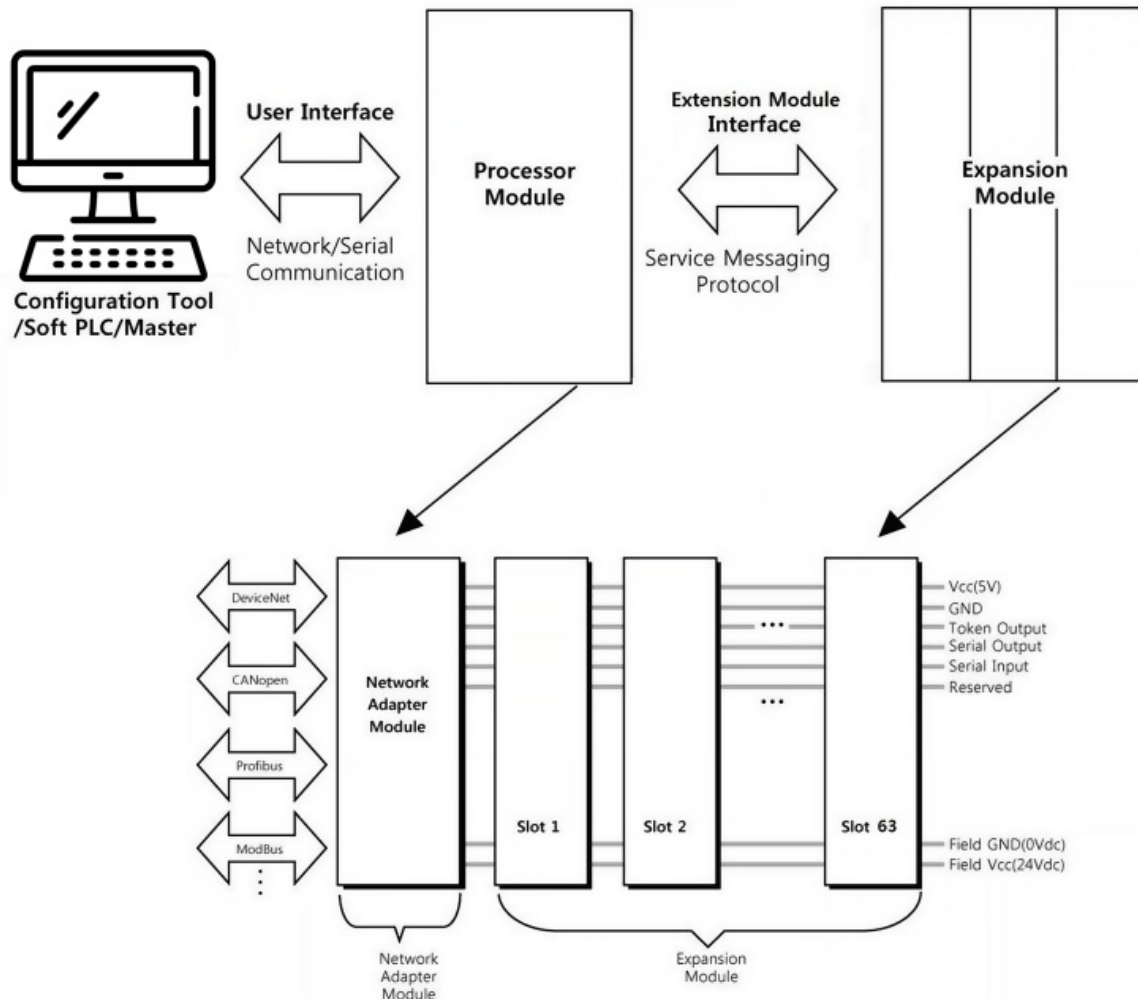


## System overview

- **Network Adapter Module** – The network adapter module forms the link between the field bus and the field devices with the expansion modules. The connection to different field bus systems can be established by each of the corresponding network adapter module, e.g., for MODBUS TCP, Ethernet IP, EtherCAT, PROFINET, CC-Link IE Field, PROFIBUS, CANopen, DeviceNet, CC-Link, MODBUS/Serial etc.
- **Expansion Module** – Expansion module types: Digital IO, Analog IO, and Special modules.
- **Messaging** – The system uses two types of messaging: Service messaging and IO messaging.

## IO Process Data Mapping

An expansion module has three types of data: IO data, configuration parameter, and memory register. The data exchange between the network adapter and the expansion modules is made via IO process image data by internal protocol.

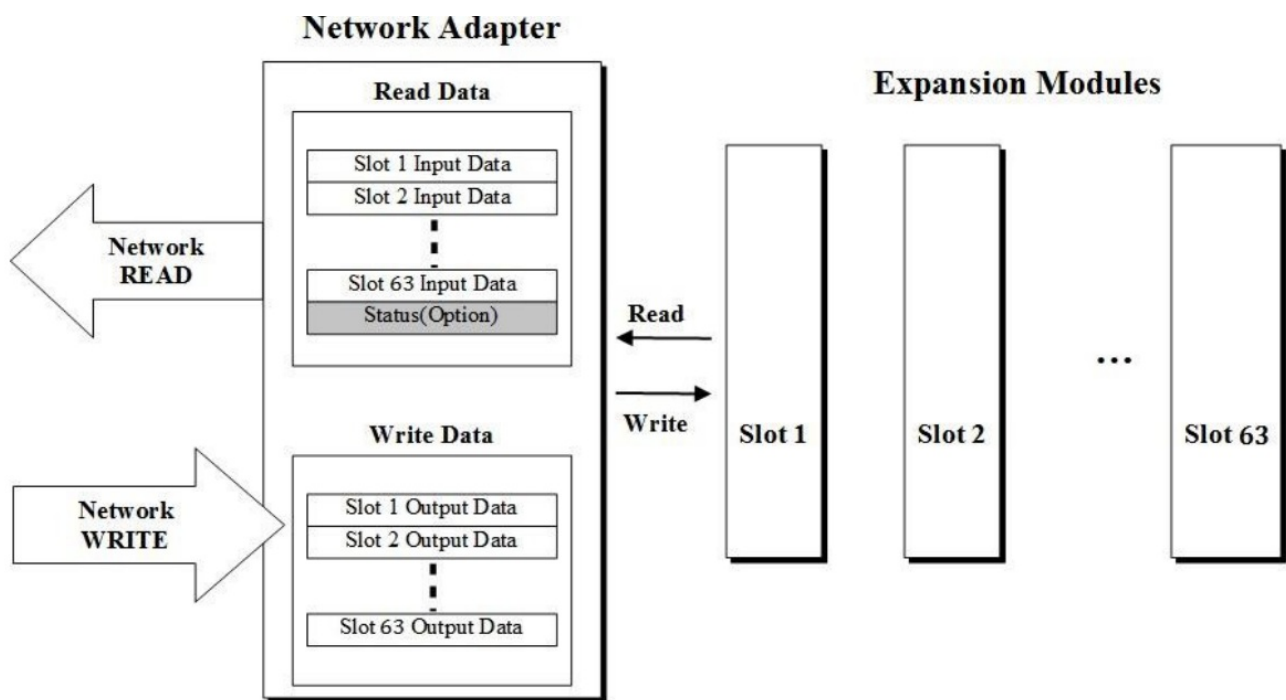

*Data flow between network adapter (63 slots) and expansion modules*

The input and output image data depend on the slot position and the data type of the expansion slot. The ordering of input and output process image data is based on the expansion slot position. Calculations for this arrangement are included in the manuals for network adapter and programmable IO modules.

Valid parameter data depends on the modules in use. For example, analog modules have settings of either 0-20 mA or 4-20 mA, and temperature modules have settings such as PT100, PT200, and PT500. The documentation for each module provides a description of the parameter data.

## Specifications

### Environmental Specifications


<b>Operating temperature</b>	-20°C – 60°C
<b>UL temperature</b>	-20°C – 60°C
<b>Storage temperature</b>	-40°C – 85°C
<b>Relative humidity</b>	5% – 90% non-condensing
<b>Mounting</b>	DIN rail

<b>Shock operating</b>	IEC 60068-2-27 (15G)
<b>Vibration resistance</b>	IEC 60068-2-6 (4 g)
<b>Industrial emissions</b>	EN 61000-6-4: 2019
<b>Industrial immunity</b>	EN 61000-6-2: 2019
<b>Installation position</b>	Vertical and horizontal
<b>Product certifications</b>	CE, FCC, UL, cUL

## General Specifications

<b>Power dissipation</b>	Max. 65 mA @ 5 VDC
<b>Isolation</b>	I/O to Logic: Photocoupler isolation  Field power: Non-isolation
<b>UL field power</b>	Supply voltage: 24 VDC nominal, Class 2
<b>Field power</b>	Supply voltage: 24 VDC nominal Voltage range: 15-30 VDC  Power dissipation: 30 mA @ 24 VDC
<b>Wiring</b>	Module connector: HIF3BA-40D-2.54R
<b>Weight</b>	63 g
<b>Module size</b>	12 mm x 109 mm x 70 mm

## Dimensions

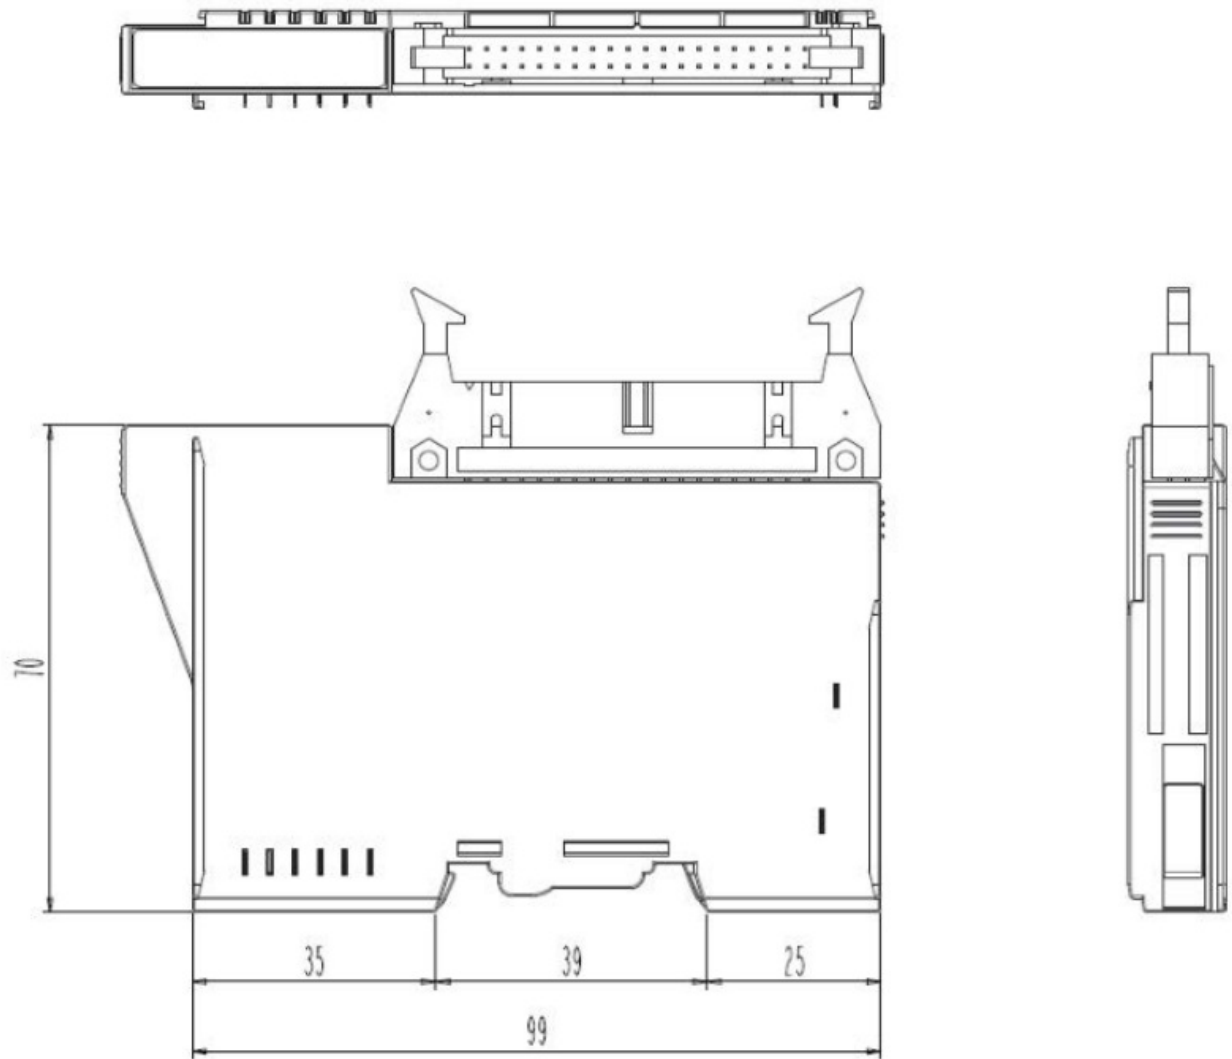

**Module** dimensions (mm)


## Output Specifications

<b>Output per module</b>	32 points source type
<b>Indicators</b>	32 green output status
<b>Output voltage range</b>	24 VDC nominal 15 VDC – 30 VDC @ 60 °C
<b>On-state voltage drop</b>	0.3 VDC @ 25 °C 0.5 VDC @ 60 °C
<b>On-state min. current</b>	Min. 1 mA



<b>Off-state leakage current</b>	Max. 5 uA
<b>Output signal delay</b>	OFF to ON: Max. 0.3 ms ON to OFF: Max 0.5 ms
<b>Output current rating</b>	Max. 0.3 A per channel / Max. 6.0 A per unit
<b>Protection</b>	Over current limit: Min. 6.5 A @ 25 °C per channel Thermal shutdown: Min 4 A @ 25 °C per channel  Short circuit protection
<b>Common type</b>	32 points / 8 COM

## Wiring Diagram

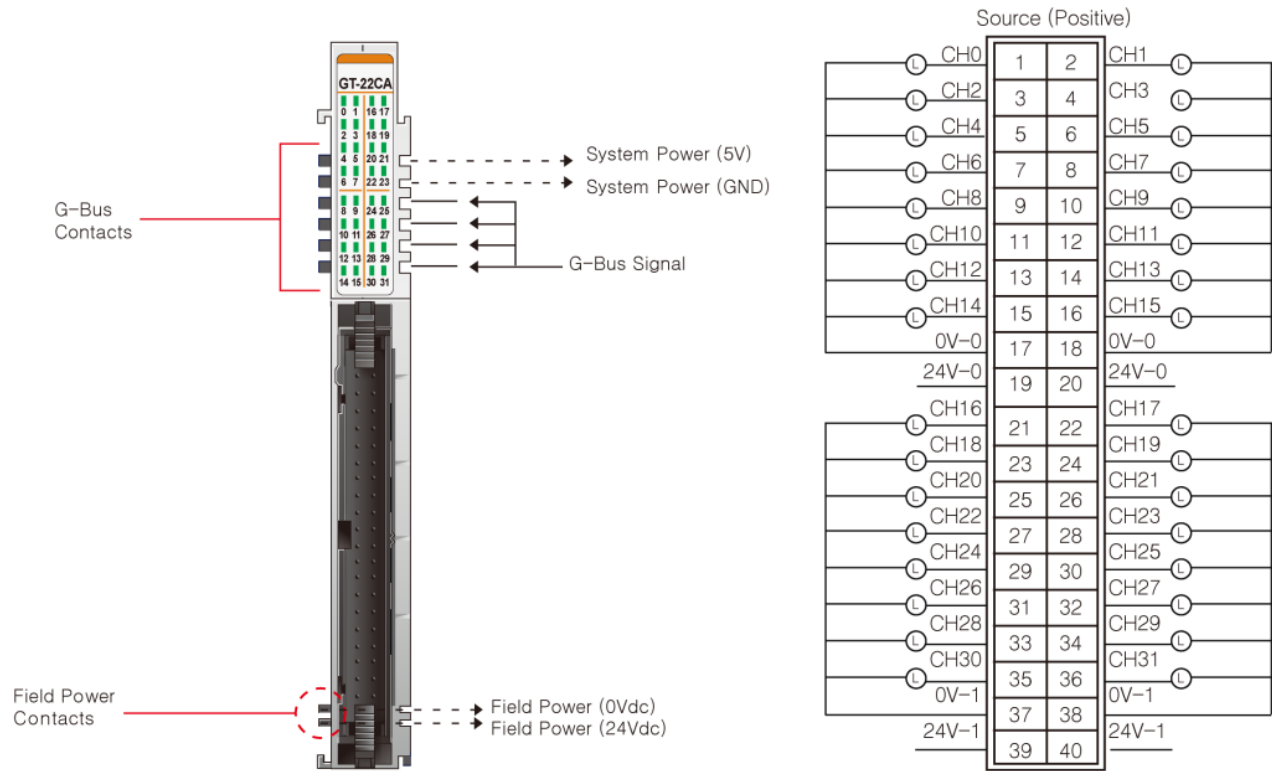


Pin no.	Signal description
---------	--------------------

1	Output channel 0
2	Output channel 1
3	Output channel 2
4	Output channel 3
5	Output channel 4
6	Output channel 5
7	Output channel 6
8	Output channel 7
9	Output channel 8
10	Output channel 9
11	Output channel 10
12	Output channel 11
13	Output channel 12
14	Output channel 13
15	Output channel 14
16	Output channel 15
17	Common (Field power 0 V)
18	Common (Field power 0 V)
19	Common (Field power 24 V)
20	Common (Field power 24 V)
21	Output channel 16

22	Output channel 17
23	Output channel 18
24	Output channel 19
25	Output channel 20
26	Output channel 21
27	Output channel 22
28	Output channel 23
29	Output channel 24
30	Output channel 25
31	Output channel 26
32	Output channel 27
33	Output channel 28
34	Output channel 29
35	Output channel 30
36	Output channel 31
37	Common (Field power 0 V)
38	Common (Field power 0 V)
39	Common (Field power 24 V)
40	Common (Field power 24 V)

## LED Indicator

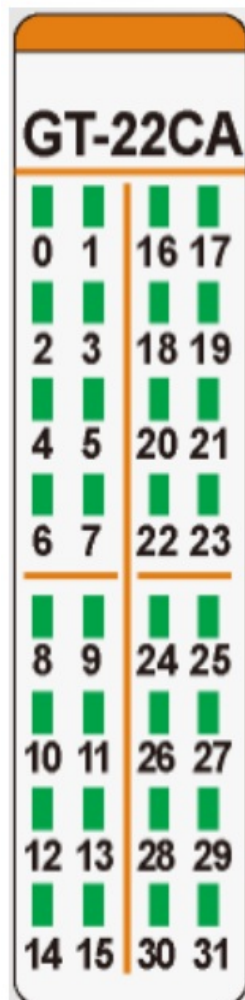

LED no.	LED function / description	LED color
0	OUTPUT channel 0	Green
1	OUTPUT channel 1	Green
2	OUTPUT channel 2	Green
3	OUTPUT channel 3	Green
4	OUTPUT channel 4	Green
5	OUTPUT channel 5	Green
6	OUTPUT channel 6	Green
7	OUTPUT channel 7	Green
8	OUTPUT channel 8	Green

9	OUTPUT channel 9	Green
10	OUTPUT channel 10	Green
11	OUTPUT channel 11	Green
12	OUTPUT channel 12	Green
13	OUTPUT channel 13	Green
...	...	...
31	OUTPUT channel 31	Green

## Channel Status

Status	LED	Indicates
Off signal	Off	No output signal
On signal	Green	Normal operation

## Mapping Data Into the Image Value

### Output Image Value

Bit no.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Byte 0	D7	D6	D5	D4	D3	D2	D1	D0
Byte 1	D15	D14	D13	D12	D11	D10	D9	D8
Byte 2	D23	D22	D21	D20	D19	D18	D17	D16
Byte 3	D31	D30	D29	D28	D27	D26	D25	D24



<b>Byte 4</b>	Fault value (ch0-ch7) 0: Off, 1: On
<b>Byte 5</b>	Fault value (ch8-ch15) 0: Off, 1: On
<b>Byte 6</b>	Fault value (ch16-ch23) 0: Off, 1: On
<b>Byte 7</b>	Fault value (ch24-ch31) 0: Off, 1: On

## Hardware Setup

### CAUTION


- Always read this chapter before installing the module!
- Hot surface! The surface of the housing can become hot during operation. If the device is used in high ambient temperatures, always let the device cool down before touching it.
- Working on energized devices can damage the equipment! Always turn off the power supply before working on the device.

### Space Requirements


The following drawings show the space requirements when installing the G-series modules. The spacing creates space for ventilation, and prevents conducted electromagnetic interference from influencing the operation. Installation position is valid vertical and horizontal. The drawings are illustrative and may be out of proportion.

### CAUTION

NOT following the space requirements may result in damaging the product.

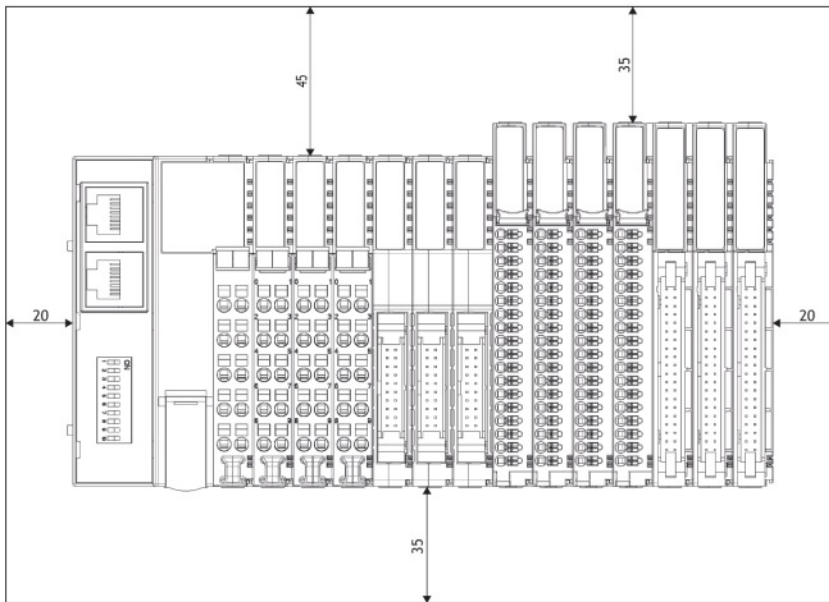

*Vertical and horizontal space requirements*

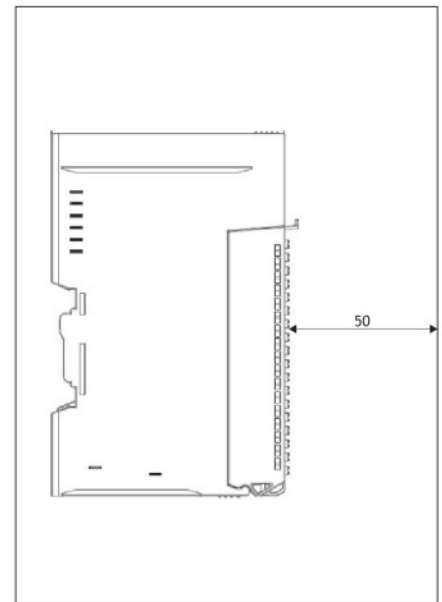

*Required distance to door*

## Mount Module to DIN Rail

The following chapters describe how to mount the module to the DIN rail.

### CAUTION

The module must be fixed to the DIN rail with the locking levers.

## Mount GL-9XXX or GT-XXXX Module

The following instructions apply to these module types:

- GL-9XXX
- GT-1XXX
- GT-2XXX
- GT-3XXX
- GT-4XXX
- GT-5XXX
- GT-7XXX

GN-9XXX modules have three locking levers, one at the bottom and two on the side. For mounting instructions, refer to Mount GN-9XXX Module.






**Mount** to DIN rail




**Dismount** from DIN rail

### **Mount GN-9XXX Module**

To mount or dismount a network adapter or programmable IO module with the product name GN-9XXX, for example GN-9251 or GN-9371, see the following instructions:

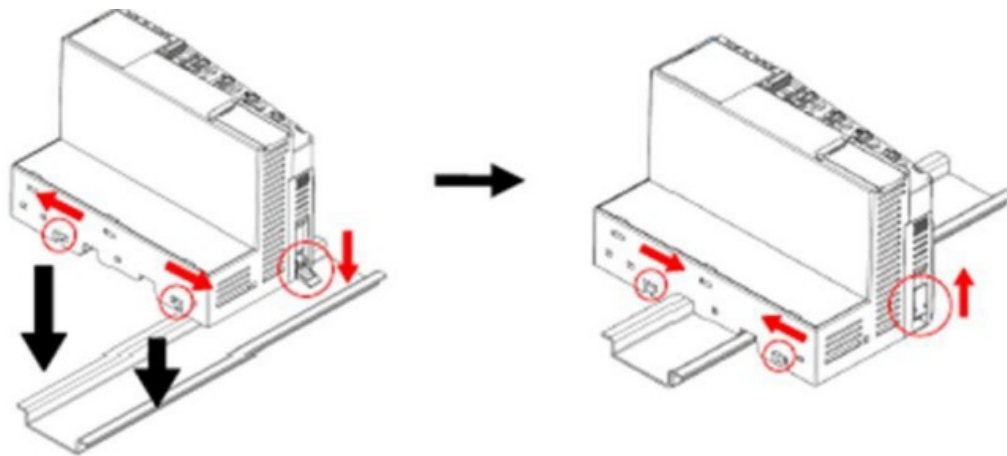

*Mount to DIN rail*

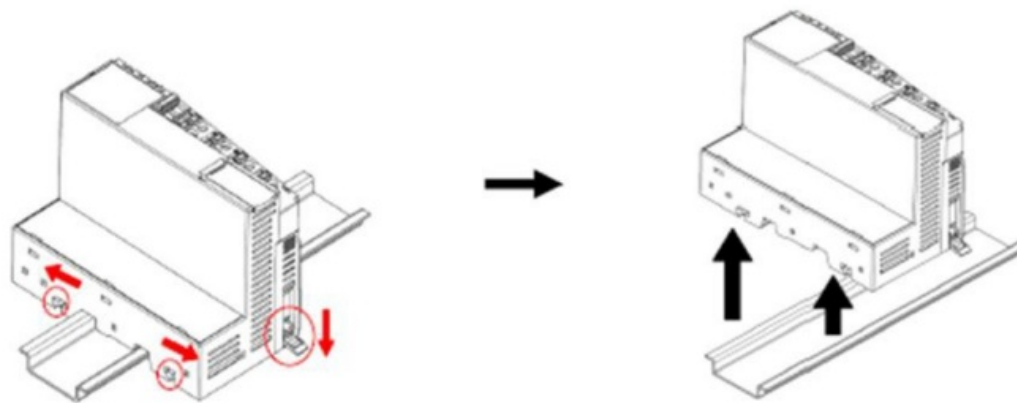


*Dismount from DIN rail*

### **Field Power and Data Pins**

Communication between the G-series network adapter and the expansion module, as well as system /field power supply of the bus modules is carried out via the internal bus. It is comprised of 2 Field Power Pins and 6 Data Pins.

### **WARNING**

Do not touch the data and field power pins! Touching can result in soiling and damage by ESD noise.

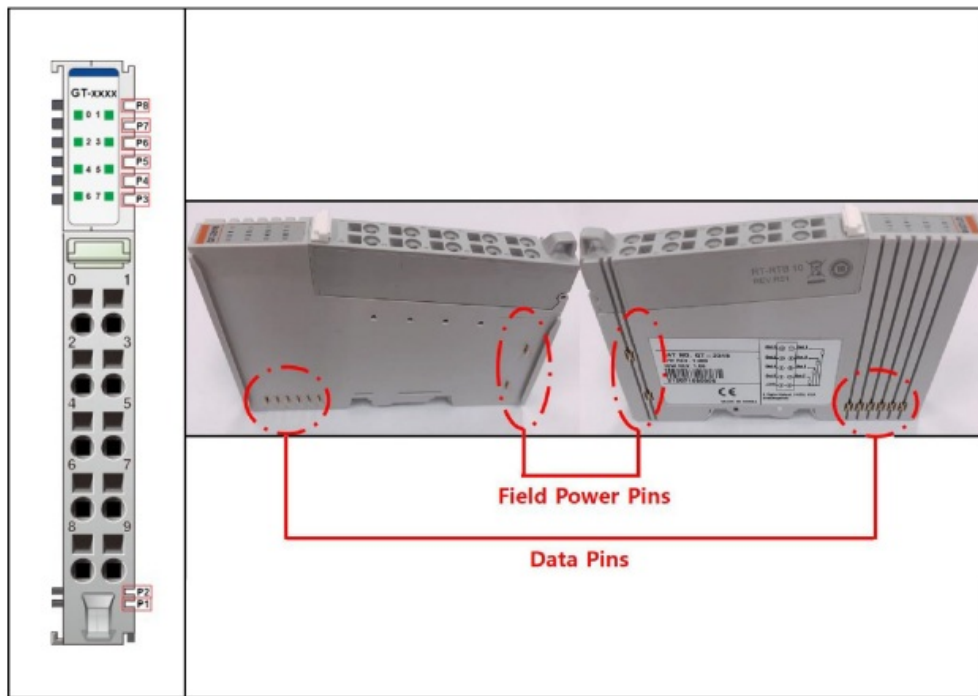

Pin no.	Name	Description
P1	System VCC	System supply voltage (5 VDC)
P2	System GND	System ground
P3	Token output	Token output port of processor module
P4	Serial output	Transmitter output port of processor module
P5	Serial input	Receiver input port of processor module
P6	Reserved	Reserved for bypass token
P7	Field GND	Field ground
P8	Field VCC	Field supply voltage (24 VDC)

## FAQ


- Q: What should I do if the module is not responding?**

A: Check the power supply, connections, and ensure proper setup within the G-series System.

- Q: Can I use this module with voltages other than 24 VDC?**

A: It is recommended to use the specified voltage for optimal performance and safety.

## Documents / Resources

	<a href="#">Beijer Electronics GT-22CA Digital Output Module [pdf]</a> User Manual GT-22CA, GT-22CA Digital Output Module, GT-22CA, Digital Output Modul e, Output Module, Module
---	---

## References

- [User Manual](#)

Beijer ELECTRONICS

Beijer ELECTRONICS, Digital Output Module, GT-22CA, GT-22CA Digital Output Module, Module, Output  
Module

---

## Leave a comment

Your email address will not be published. Required fields are marked \*

Comment \*

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

**Post Comment**

**Search:**

e.g. whirlpool wrf535swhz

**Search**

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.