



BIG DOG PR-W3PI Intelligent Wall Mount Power Distribution Unit User Manual

[Home](#) » [BIG DOG](#) » BIG DOG PR-W3PI Intelligent Wall Mount Power Distribution Unit User Manual 

Contents

- [1 BIG DOG PR-W3PI Intelligent Wall Mount Power Distribution](#)
- [2 Introduction](#)
- [3 Features](#)
- [4 Limited Product Warranty](#)
- [5 Excluded Items](#)
- [6 Anatomy](#)
- [7 LED Indicators](#)
- [8 Installation Surface Mount](#)
- [9 Connections and Use](#)
- [10 Wi-Fi Setup](#)
- [11 Cloud setup](#)
- [12 Factory Reset](#)
- [13 Important Safety Instructions](#)
- [14 Power cord safety](#)
- [15 FCC Warning](#)
- [16 FCC Part15C+RSS247](#)
- [17 Specifications](#)
- [18 Documents / Resources](#)
 - [18.1 References](#)
- [19 Related Posts](#)



BIG DOG PR-W3PI Intelligent Wall Mount Power Distribution



Introduction

Thank you for purchasing the PR-W3PI. Your new Power Distribution Unit (PDU) by Big Dog Power provides filtered AC power to your equipment. 3 individually controlled outlets provide up to 2380 Joules of surge Protection. Wi-Fi and Wired LAN connections allow for flexibility with placement and network connectivity. The built in Self-Healing functions of the PR-W3PI will keep your network connected equipment going by automatically rebooting and maintaining the equipment. The PR-W3PI is designed to be used in an ITE Computer room or within an equipment rack. It can be surface mounted in many orientations such as to the inside of a rack, the underside of a rack shelf that has slots or drilled holes or onto the wall in an IT or server room.

Features

- 3 individually controlled outlets
- Wall/Surface Mountable
- Self-Healing functions for network connected equipment
- 2380 Joule Surge Protection (L-N Protection)
- Web and Mobile app for remote management and notification
- IP automation integration
- 120V/12A Rating

Big Dog Power™ by Metra Home Theatre, LLC Limited Product Warranty and Connected Equipment Limited Warranty

Valid in the United States and Canada

THIS WARRANTY DEFINES ETHEREAL HOME THEATRE. LLC'S LIABILITY FOR ANY AND ALL DAMAGES RESULTING FROM THE OPERATION OR FAILURE OF THE PRODUCT. THE WARRANTY PROVIDED IS IN LIEU OF ANY AND ALL OTHER WARRANTIES, EXPRESS OR IMPLIED. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, METRA DISCLAIMS ANY AND ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, ETHEREAL HOME THEATRE. LLC HEREBY DISCLAIMS ANY AND ALL LIABILITY FOR DIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES RESULTING FROM ANY PRODUCT FAILURE, ANY BREACH OF WARRANTY OR CONDITION, OR UNDER ANY OTHER LEGAL THEORY, INCLUDING BUT NOT LIMITED TO LOSS OF USE; LOSS OF REVENUE; LOSS OF ACTUAL OR ANTICIPATED PROFITS (INCLUDING LOSS OF PROFITS ON CONTRACTS); LOSS OF THE USE OF MONEY; LOSS OF ANTICIPATED SAVINGS; LOSS OF BUSINESS; LOSS OF OPPORTUNITY; LOSS OF GOODWILL; LOSS OF REPUTATION; LOSS OF, DAMAGE TO,

COMPROMISE OR CORRUPTION OF DATA; OR ANY INDIRECT OR CONSEQUENTIAL LOSS OR DAMAGE HOWSOEVER CAUSED INCLUDING THE REPLACEMENT OF EQUIPMENT AND PROPERTY, ANY COSTS OF RECOVERING, PROGRAMMING, OR REPRODUCING ANY PROGRAM OR DATA STORED IN OR USED WITH THE PRODUCT. FURTHER, TO THE MAXIMUM EXTENT ALLOWED BY APPLICABLE LAW, Ethereal Home Theatre, LLC HEREBY EXPLICITLY DISCLAIMS ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. THESE LIMITATIONS SHALL NOT APPLY TO ANY DEATH OR PERSONAL INJURY CLAIMS, OR ANY LIABILITY FOR INTENTIONAL ACTS OR ACTS OF GROSS NEGLIGENCE

Limited Product Warranty

Ethereal Home Theatre, LLC warrants this product to be free of material defects for a period of (1) 5 years for the PR-R13PI,

PR-V7PI and PR-W3PI products, (2) 3 years for the PR-S1PI product, (3) PR-RMS1 and PR-RMS2, replaceable surge modules carry a 90 Day warranty from manufacturing defects, and (4) 3 years for any other product subject to this Warranty (referred to as the applicable "warranty period"). If the product fails during the warranty period, Ethereal Home Theatre, LLC will, at its option: (1) Repair the product in a reasonable time period, (2) Replace the product with the same model (or a successor model with the same or substantially similar features), or (3) Refund the purchase price. This Warranty applies only to an original purchaser of the product who provides proof of purchase at the time a claim is made.

Conditions and Limitations:

Proof of purchase is required. Damage caused by accidents, abuse, misuse, or modification of the surge suppressor will render this warranty null and void. Transient Voltage Surge Suppression devices using MOV (Metal Oxide Varistor) technology are designed to sacrifice themselves to protect the connected equipment. The proper functioning of this surge suppressor during a catastrophic surge event like lightning may result in the depletion of the unit's protection capabilities. This is not a defect in design, material, or workmanship.

Excluded Items


This warranty does not apply to:

1. consumable items, such as a replaceable surge protection module,
2. cosmetic damage such as scratches, dents, broken plastic parts, and discoloration (unless the same is the result of a defect in materials or workmanship),
3. damage resulting from the failure of another product,
4. damage caused by misuse or abuse, or
5. damage caused by unauthorized service of the product.

Connected Equipment Limited Warranty:

This is a limited warranty, subject to the conditions, limitations and exclusions identified herein. Ethereal Home Theatre, LLC warrants to the original purchaser of this surge suppressor that it will at its option, pay the fair market value of, repair, or replace, any home entertainment equipment which is damaged by a transient surge while properly connected through the Ethereal Home Theatre, LLC surge suppressor to a properly wired and grounded AC power line. The Ethereal Home Theatre, LLC surge suppressor must have been designed for the particular application. For additional warranty information including Connected Equipment coverage and process visit us at metraav.com

Anatomy

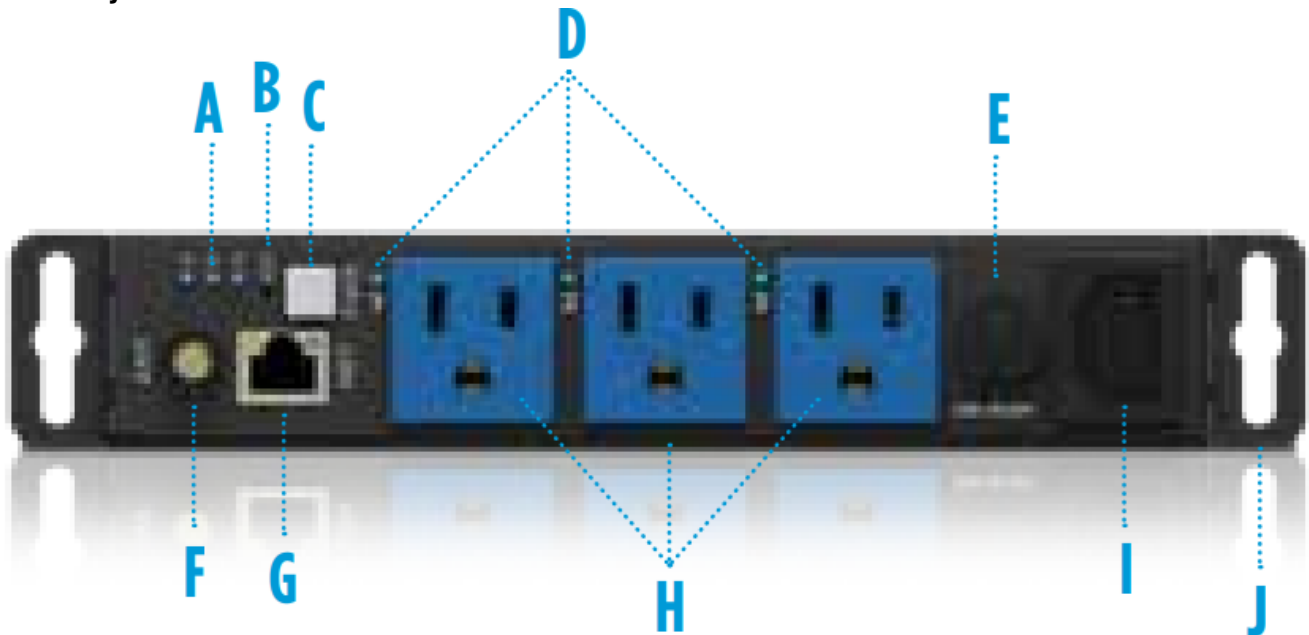



- **A. At a glance status LEDs**
 - See LED functions for more information
- **B. Recessed Reset button**
 - Hold the button for 10 seconds to perform a factory restore
- **C. Configurable Power Button**
- **D. Outlet Status LEDs**
 - See LED functions for more information
- **E. 15-amp Circuit Breaker**
- **F. Wi-Fi Antenna**
- **G. Ethernet Port**
- **H. Individually controlled outlets**
- **I. IEC Power Input 120V**
- **J. Surface mount ear attachment locations**

LED Indicators

- **“G” or Ground ON:** PDU is grounded properly
 - OFF: PDU is not grounded
- **“P” or Power BLUE:** Good / Protected and Clean Power
- **RED:** Bad / No Protection
- **“N” or Network BLINKING RED:** No Network Connection
- **SOLID BLUE:** Good Network Connection
- **RAPID BLINKING RED:** PDU failure requires a reboot or reset
- **Outlet Status ON:** Outlet is On
 - OFF: Outlet is Off

Installation Surface Mount

1. Use the included screws to attach surface mount ears to PDU Surface mount ears may be attached at 0°, 90°, 180°, and 270° to accommodate desired mounting orientation
2. Install appropriate surface mount screws (not included) through the surface mount ears into the desired surface

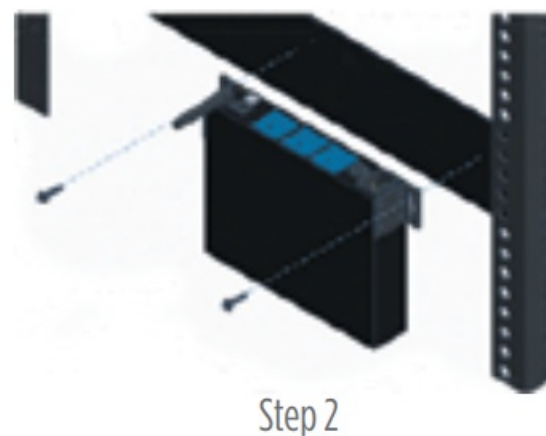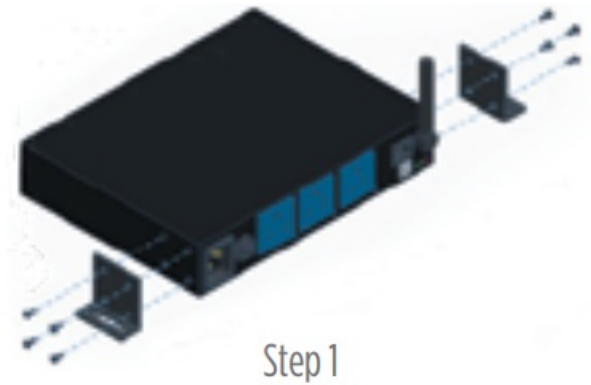

Connections and Use

Physical Connections

1. Screw in the Wi-Fi Antenna
2. Plug in all to-be-used connections Including:
 - Ethernet LAN (Skip the Ethernet cable if you will be using Wi-Fi)
 - Connected equipment power cables
3. Insert the female end of the included 6ft power cord into the PR-W3PI
4. Plug in the Male end of the included 6ft power cord into the main outlet on your wall

Wi-Fi Setup

If using the Wi-Fi connection, follow these instructions

1. Plug in the included power cable to the PDU and to the AC main outlet on the wall. Wait approximately 15-30 seconds, the power button will begin to flash
2. Scan for Wi-Fi on your Wi-Fi-enabled device with a web browser
3. Connect to the Wi-Fi SSID of the PDU The SSID of the PDU will be "Metra-XXXX XXXX XXXX" where the "x" are the MAC address or device ID of the PDU. Verify the code of the SSID matches the MAC address of the

PDU with the sticker that is attached to the bottom of the PDU

4. In a web browser go to “192.168.4.1”

5. **Go to “Network”**

6. **Click “SCAN NETWORKS”**

The network mode can also be changed before scanning. For ease of setup we'll use the default DHCP settings.

7. **Select the desired network SSID**

NOTE: the PDU requires a 2.4Ghz Wi-Fi connection.

8. **If required enter the password for the Wi-Fi connection**

9. **Click “Save”**

The PDU will now connect and reboot. After it has rebooted it will attempt to connect to the Wi-Fi signal.

10. Once the PDU has been connected to the network and has access to the web, proceed to the next steps

Cloud setup

1. Log in to your MAVbase.com account

2. Click the Add New button

3. Click “ADD PDU”

4. Add the PR-W3PI to your account using the MAC address of the PDU

Factory Reset

1. Press and hold the “Reset” or “RST” button on the PDU

2. Hold the button for 15-20 seconds

3. Release the button

a. The Power button will begin flashing

Important Safety Instructions

Read and observe the following safety points at all times.

Notice

For indoor use only. Internal components are not sealed from the environment. The device can only be used in a fixed location such as a telecommunication center, or a dedicated computer room. When you install the device, ensure that the protective earthing connection of the socket-outlet is verified by a skilled person. Suitable for installation in Information Technology Rooms to power ITE equipment such as Monitors, Computers, Etc. Only use brackets/attachments/accessories specified by the manufacturer. Do not place the device in an unstable position where it might fall and cause injuries. This equipment is not suitable for use in locations where children are likely to be present.

Do not cover this device with a cloth. Do not install it on a carpet or rug.

Caution Potential injury

Do not use this product with extension cords, multi-outlet power strips, multi-outlet extenders, or UPS devices (other than a Big Dog Power UPS). The power capacity of these accessories can be overloaded by this product and may result in a risk of fire, or property damage.

Exposure to Heat

Do not expose the PDU to direct sunlight or place it near wall heaters, space heaters, or in an enclosed space prone to temperature increase. Do not use the device in a confined, poorly-ventilated location; this can overheat the unit, possibly even causing a fire. If used in a small space other than an EIA-standard rack, ensure that there is adequate space around the device.

Proper Cleaning

In general, the only cleaning necessary for is a light dusting. Unplug the PDU from the wall outlet before cleaning it. Do not use liquid or aerosol cleaners.

Warning

Power sources, grounding, and polarization

This plug is designed to be inserted into a NEMA 5-15 (three-prong grounded) outlet only. Do not force the plug into an outlet that is not designed to accept it. Never dismantle the plug or to alter the power cord, and do not attempt to defeat the grounding feature by using a 3-to-2 prong adapter. If you have questions about grounding, consult your local power company or a qualified electrician. This PDU requires a properly grounded outlet for safety. If you're not sure if your home's electrical wiring is properly grounded, have it checked by a qualified electrician. If a rooftop device such as a satellite dish connects to the PDU, ensure that the device's wires are also properly grounded.

Liquid: avoiding electrical shocks

Do not operate the PDU if liquid of any kind is spilled onto or inside the unit. Do not operate it near rain or water, even water that is contained (for example, bathtub or sink).

Power cord safety

Do not place the power cord near areas with heavy foot traffic (for example, hallways). Do not create a trip hazard with the power cord. If the power cord's protective jacket rips or frays, exposing the internal wiring or shielding, disconnect it from the power source and replace the power cord immediately. See the warranty section of the owner's manual for details.

No User-Serviceable Parts Inside

If the PDU is not operating properly, do not remove any part of the unit (cover, etc.) for repair. Unplug the unit and consult the warranty section of the owner's manual.

FCC Warning

WARNING!! Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B Digital Device, pursuant to Part 15 of the FCC

Rules. These limits are designed to provide reasonable protection against harmful interference in residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined

by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Notice: (1) An unshielded-type power cord is required in order to meet FCC emission limits and also to prevent interference to the nearby radio and television reception. It is essential that only the supplied power cord be used. (2) Use only shielded cables to connect I/O devices to this equipment. Note: THE MANUFACTURER IS NOT RESPONSIBLE FOR ANY RADIO OR TV INTERFERENCE CAUSED BY UNAUTHORIZED MODIFICATIONS TO THIS EQUIPMENT. SUCH MODIFICATIONS COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.

The Class B digital apparatus meets all requirements of the Canadian Interference-Causing Equipment Regulation Cet appareil numérique de la class B respecte toutes les exigences du Règlement sur le matériel brouilleur du Canada.

FCC Part15C+RSS247

To assure continued FCC compliance:

1. Any changes or modifications not expressly approved by the grantee of this device could void the user's authority to operate the equipment.
2. This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.
3. This radio transmitter [27941-PRW3PI] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

- **NO. 1**
- **Antenna Type** Dipole
- **Model Name** Q0211
- **Gain (Peak)** 2dBi

IC

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device. This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

IC French:

Cet appareil radio est conforme au CNR-247d'Industrie Canada. L'utilisation de ce dispositif est autorisée seulement aux deux conditions suivantes : (1) il ne doit pas produire de brouillage, et (2) l'utilisateur du dispositif doit être prêt à accepter tout brouillage radioélectrique reçu, même si ce brouillage est susceptible de compromettre le fonctionnement du dispositif.

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20 cm de distance entre la source de rayonnement et votre corps.

UL Safety:

- **Type 1**, Operating Control
- **External Pollution Situation:** Pollution Degree 2
- **Rated Impulse Voltage:** 1500V

© Copyright 2022 Ethereal Home Theater, LLC.

An online purchase registration is available at www.metraav.com. Registering your surge protector at the time of purchase can make the process a lot easier if you ever need to file a claim. Please contact the Ethereal Home Theatre, LLC Customer Service Department at 386-257-1186 if you have any questions regarding the product warranty or the connected equipment warranty.

- **Ethereal Home Theatre, LLC**
- **460 Walker Street**

- Holly Hill, FL 32117
- Phone:386-257-1186
- E-Mail: stewart.denton@metraav.com

INTELLIGENT POWER We've combined multiple features into one unique power distribution unit that fits behind your wall-mounted TV. This 3-outlet smart power controller delivers surge protection, remote control, smart home integration and more. The 3 individually controllable outlets give you self-healing, automatic reboot, and power metering for total power management. The intuitive MAVbase app provides a simple user experience for easy management of your connected devices

Specifications

- **OPERATING TEMPERATURE:** 14°F-104°F (-10°C-40°C)
- **SURGE PROTECTION:** 2380 Joule
- **EXTERNAL ANTENNA:** Yes
- **OUTLETS (TOTAL):** 3 outlets
- **SWITCHED OUTLETS:** 3
- **AC INPUT OUTLET:** IEC C14, 15A circuit, product UL rating 12A
- **CIRCUIT BREAKER (COP):** Yes (rear)
- **CORD LENGTH:** 6ft
- **SAFETY CERTIFICATIONS:** UL/CUL, FCC. ULG0730-1+UL 498+1449 with CSA 269.3+UL 1283, FCC Part15B+ICES-003, FCC I1D/ISED (Wireless de vice FCC)
- **WARRANTY:** 5-Year Limited
- **WARNING:**
- **Cancer and Reproductive Harm**
- www.P65Warnings.ca.gov.
- Metra Electronics Corp.
- BigDogPower.com
- **APP:** MAVbase.com
- 386-255-0234

Documents / Resources



[BIG DOG PR-W3PI Intelligent Wall Mount Power Distribution Unit](#) [pdf] User Manual
 PR-W3PI Intelligent Wall Mount Power Distribution Unit, PR-W3PI, Intelligent Wall Mount Power Distribution Unit, Intelligent Wall Mount Distribution Unit, Wall Mount Power Distribution Unit, Power Distribution Unit, Distribution Unit

References

- [Homepage - Big Dog Power](#)
- [Login - MAV Base](#)
- [MetraAV.com | The Integrator's Choice](#)
- [MetraAV.com | The Integrator's Choice](#)