



BN-LINK BNH-60/SU107 8 Button Countdown Plug In Timer User Manual


[Home](#) » [BN-LINK](#) » BN-LINK BNH-60/SU107 8 Button Countdown Plug In Timer User Manual 

Contents


- [1 BN-LINK BNH-60/SU107 8 Button Countdown Plug-In Timer](#)
- [2 PRODUCTS VIEW](#)
- [3 RATINGS](#)
- [4 OPERATING INSTRUCTIONS](#)
- [5 TROUBLESHOOTING](#)
- [6 Documents / Resources](#)
- [7 Related Posts](#)

BN-LINK

BN-LINK BNH-60/SU107 8 Button Countdown Plug-In Timer

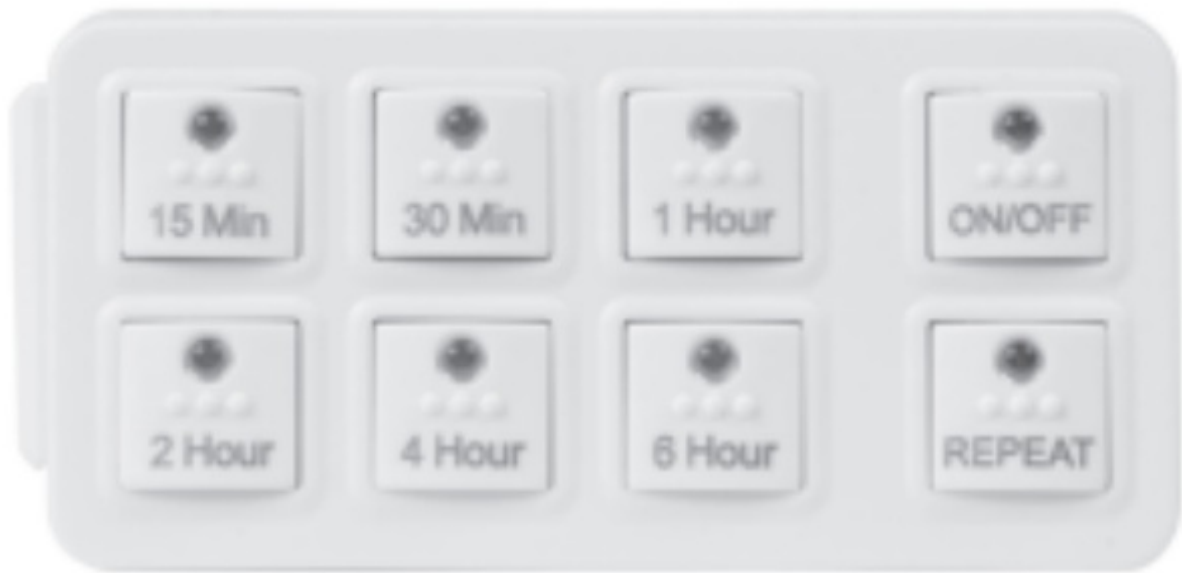

PRODUCTS VIEW

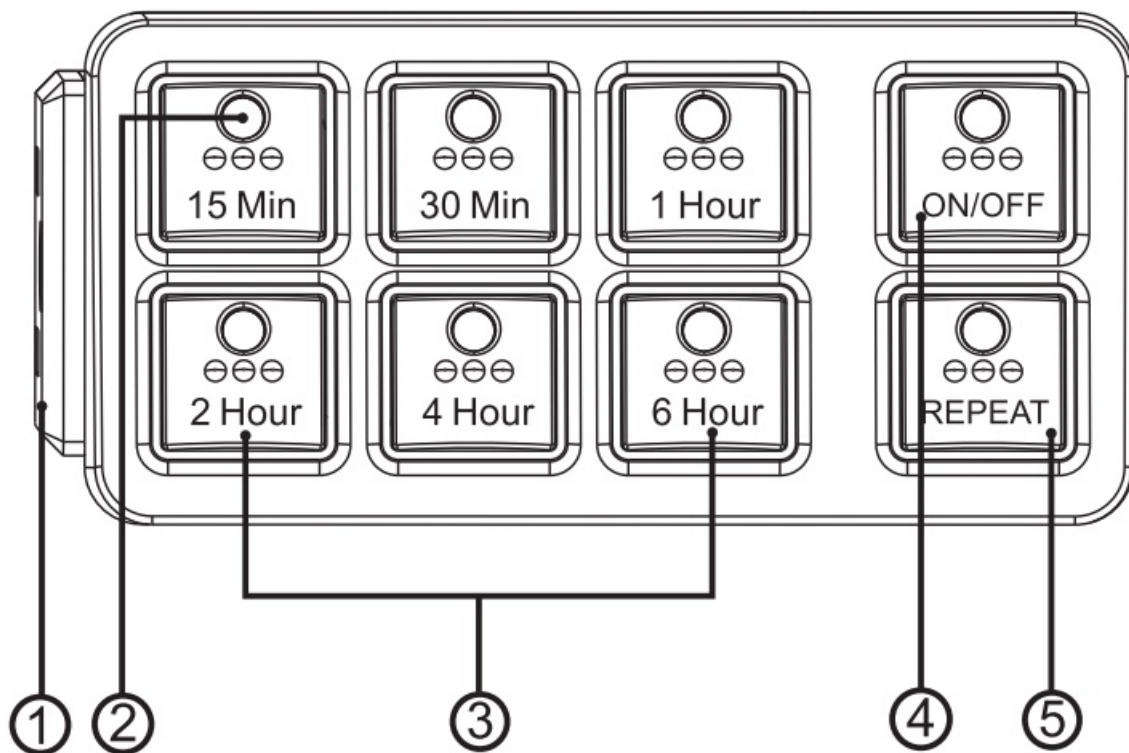

1. **Socket:** Only intended to be used with a grounded device.
2. **LED Indicator:** To show self-diagnosis at the initialization stage program is activated.
3. **Countdown Program Button:** Press to start a countdown program
4. **ON/OFF Button:** Manually turn ON/OFF or override a running program 24-Hr
5. **Repeat Button:** Activate or deactivate the daily repeat of program

There are 8 buttons on the main panel: 6 countdown buttons, an ON/OFF button, and a REPEAT button.

RATINGS

125V-60Hz 15A/1875W Resistive & General purpose 10A/1250W Tungsten & Electronic Ballast 1/2HP, TV-5

- **Operating temperature:** 5°F-122°F(-15°C-50°C)
- **Storage temperature:** -4°F-140°F (-20°C-60°C)
- **Insulation class:** II
- **Protection class:** IP20
- **Clock accuracy:** +/-2 minutes/month Min.
- **setting time:** 15 minutes
- **Max.setting time:** 6 hours

WARNING

- **Electrical shock hazard**
- **Risk of fire**
- **Follow local electrical codes**
- **For indoor use only**
- **Unplug timer before cleaning**
- **Keep children away**
- **Do not use in wet locations**
- **Do not exceed electrical ratings**
- **Risk of injury or death**
- **Use a grounded outlet**
- **Fully insert plug**

APPLICATIONS

- **Lighting**
- **Heating systems**
- **Humidifiers**
- **Nebulizers**
- **Cooling systems**
- **Indoor sprinklers**
- **Aquariums.**
- **Ventilators**

OPERATING INSTRUCTIONS

- **Initialization:** When the timer is first powered, all the indicators will illuminate and then go out after the self-diagnosis process. There is no power output at this stage.
- **Setting a countdown program:** Simply press the button that represents a desired countdown program, the indicator on the button illuminates and the countdown starts. The timer will output power and then cut it off when the countdown process ends. Pressing repeatedly the same button before the countdown ends will not restart the countdown.


Example: The 30-minute button is pressed at 12:00, pressing this button before 12:30 will not restart the countdown program.



- Shifting to another countdown program To shift to another countdown program, just press the corresponding button. The indicator on the previous button will go out and the indicator on the newly pressed button illuminates. The new countdown process starts.

Example: Press the 1-hour button while a 30-minute program is already in the run. The indicator on the 30-minute button will go out and the indicator on the 1-hour button illuminates. The timer will output power for 1 hour. The power output will not be cut off during the shift.

- Activating the daily repeat function Press the REPEAT button when a countdown program is running, the indicator on the REPEAT button illuminates, indicating that the daily repeat function is now active. The current program will run once again at the same time in the next day.

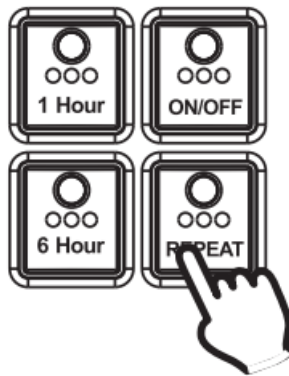


Example: If a 30-minute program is set at 12:00 and the REPEAT button is pressed at 12:05, the 30-minute countdown program will run every day at 12:05 from the next day on.

- Deactivation of the daily repeat function Follow either way below to turn off the daily repeat function.
 - Press REPEAT button, the indicator on the button will go out. This will not affect an ongoing program.
 - Press ON/OFF button to end the ongoing program as well as the daily repeat function.

Note: When a countdown program is in the run with the daily repeat function active, press another countdown program button will start a new countdown process and deactivate the daily repeat function.

- Termination of a countdown program. A countdown program terminates in the following 2 conditions:
 - When the countdown program completes, the indicator goes out and the power output is cut off. 1 Hour
 - Press ON/OFF button at any time to terminate a countdown program. This operation also deactivates the daily repeat function. 000 6 Hour
-



Always-ON If a countdown is already in the run or the daily repeat function is active, press ON/OFF twice to set the timer to ALWAYS ON. If the timer is in OFF mode, press ON/OFF once.

Note: In ALWAYS ON mode, the indicator on the ON/OFF button illuminates and the power output is permanent.

- **Terminating ALWAYS ON**

- Press ON/OFF button, the ON/OFF indicator goes out and the power output is cut off, or,
- Press a countdown program button.

- **Restarting a running countdown program**

- Press ON/OFF to terminate the program and then press the countdown button, or
- Press another countdown button and then press the previous countdown button, or
- Activate the daily repeat function (if it is already active, please deactivate first) and the current countdown process will restart. If the daily repeat function is not needed, please press REPEAT button again.

TROUBLESHOOTING

- **PROBLEM:** No button is responsive.

- **POSSIBLE CAUSES AND SOLUTION:** Check that the timer is receiving power.


- **PROBLEM:** The daily repeat function cannot be activated.

- **POSSIBLE CAUSES AND SOLUTION:** Check that the REPEAT indicator illuminates. This feature functions only when the indicator is on.

BN-LINK INC.

12991 Leffingwell Avenue, Santa Fe Springs Customer Service Assistance: 1.909.592.1881 **E-mail:** support@bn-link.com [Http://www.bn-link.com](http://www.bn-link.com) **Hours:** 9AM – 5PM PST, Mon Fri Designed in California Made in China

Documents / Resources

 <p>BN-LINK PRODUCT # BNH-60/SU107 8-BUTTON COUNTDOWN PLUG-IN TIMER Please keep this handbook www.bn-link.com Designed in California Made in China</p>	<p>BN-LINK BNH-60/SU107 8 Button Countdown Plug In Timer [pdf] User Manual BNH-60, SU107, 8 Button Countdown Plug In Timer, BNH-60 8 Button Countdown Plug In Timer, SU107 8 Button Countdown Plug In Timer, BNH-60 SU107 8 Button Countdown Plug In Timer</p>
---	--