

[Manuals.plus](#) /

> [Intex](#) /

> INTEX Prism Frame 15ft x 48in Round Above Ground Swimming Pool Set with Filter Pump - User Manual

Intex 26725EH

INTEX Prism Frame 15ft x 48in Round Above Ground Swimming Pool Set

Model: 26725EH



Image: The complete INTEX Prism Frame 15ft x 48in round above ground swimming pool set, showcasing its grey frame and blue interior, ready for use in a backyard setting.

1. IMPORTANT SAFETY INFORMATION

Read, understand, and follow all instructions carefully before installing and using this product. Failure to do so may result in serious injury or death. Keep this manual for future reference.

- **Adult Supervision Required:** Never leave children unattended in or around the pool.
- **No Diving or Jumping:** Shallow water can cause serious injury or death.
- **Pool Barrier:** Install fencing or approved barriers around the pool to prevent unsupervised access.
- **Chemical Safety:** Handle pool chemicals according to manufacturer's instructions. Keep out of reach of children.
- **Electrical Safety:** Ensure all electrical connections for the filter pump are properly grounded and protected by a Ground Fault Circuit Interrupter (GFCI). Do not use extension cords.
- **Emergency Preparedness:** Keep a telephone and emergency numbers near the pool.

This product is intended for outdoor use only. Ensure the pool is placed on a level, stable surface.

2. PACKAGE CONTENTS

Verify that all components listed below are present in your package before beginning assembly. If any parts are missing or damaged, do not proceed with assembly and contact Intex customer service.

INTEX®

COMPLETE SET



**Cartridge
Filter Pump**



**Removable
Ladder**



Debris Cover



Ground Cloth

Image: An illustration showing all components included in the INTEX Prism Frame Pool Set: Cartridge Filter Pump, Removable Ladder, Debris Cover, and Ground Cloth.

- **Pool Liner:** Durable 3-ply puncture-resistant material.
- **Pool Frame:** Powder-coated steel tubing and composite T-Joints.
- **Krystal Clear™ Cartridge Filter Pump:** 1000 GPH (Gallons Per Hour) with Hydro Aeration Technology.
- **Safety Ladder:** Removable, with coated corrosion-resistant steel frame and slip-resistant steps.
- **Ground Cloth:** Provides added protection for the pool bottom.
- **Pool Cover:** Durable material with rope tie to secure it.
- **Repair Patch:** For minor liner repairs.

3. SETUP INSTRUCTIONS

Proper site preparation and assembly are crucial for the longevity and safety of your pool. Assembly typically takes approximately 45 minutes before filling.

3.1 Site Preparation

1. **Choose a Location:** Select a firm, level piece of ground, free of sharp objects, debris, or overhead obstructions. The area should be large enough to accommodate the pool (15ft diameter) plus additional space for access and the filter pump.
2. **Level the Ground:** The ground must be perfectly level. An unlevel pool can cause the frame to collapse and water to spill, leading to property damage or injury. Do not use sand to level the ground, as it can shift.
3. **Drainage:** Ensure the chosen site has adequate drainage away from your home or other structures.

3.2 Ground Cloth Placement

Spread the included ground cloth evenly over the prepared level area. This provides an additional layer of protection for the pool liner.

Ground Cover

- Durable material
- Added protection for pool bottom


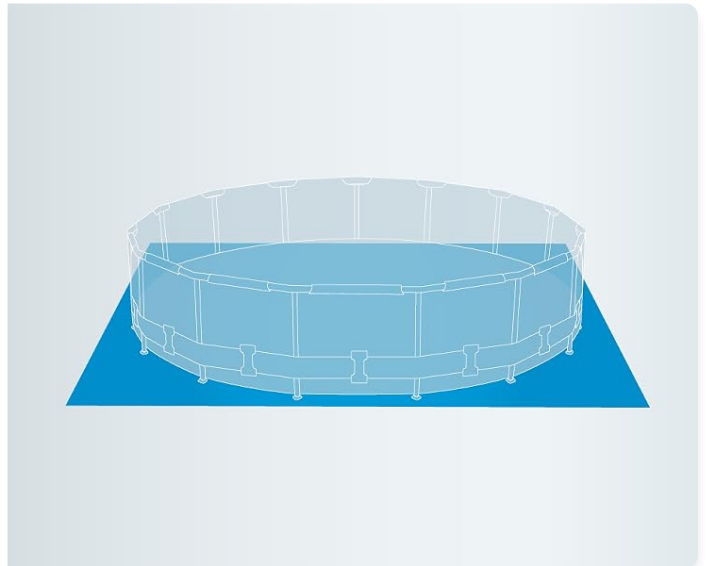


Image: A diagram illustrating the placement of the ground cover underneath the pool frame.

3.3 Pool Liner and Frame Assembly

Unfold the pool liner and spread it out on top of the ground cloth. Ensure the drain plug is positioned away from your house or any structures. Begin assembling the frame by inserting the horizontal beams through the sleeves of the liner and connecting them with the composite T-Joints. The innovative T-Joint design allows for quick, tool-free assembly.

INNOVATIVE FRAME

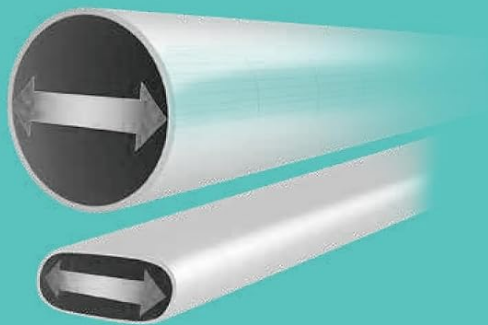

ADVANCED STRUCTURE

Oversized metal tubing with oval vertical supports for optimized frame strength



SIMPLE T-JOINTS

Engineered for fast, tool-free assembly

DURABLE LINER



STANDARD 3-PLY

Made of puncture-resistant laminate material

Image: A detailed view of the INTEX Prism Frame's innovative structure with oversized metal tubing and simple T-Joints, alongside a cross-section of the standard 3-ply puncture-resistant liner material.

3.4 Filter Pump Connection

Connect the filter pump to the pool's inlet and outlet fittings according to the pump's instruction manual. Ensure all hoses are securely fastened and clamps are tightened to prevent leaks. Position the pump on a stable, level surface near the pool, ensuring it is within reach of a grounded electrical outlet with GFCI protection.

Krystal Clear™ Cartridge Filter Pump C1000

- Pumps 1,000 gal. (3,785 L) per hour
- System flow rate: 750 gph (2,839 lph)
- Energy-saving timer built into the GFCI
- Automatic daily filtration with 2-10 hour cycles
- Equipped with 25 ft. power cord



Image: A close-up of the Krystal Clear Cartridge Filter Pump, showing its design and connection points.

3.5 Ladder Assembly

Assemble the safety ladder following its specific instructions. Place the ladder on a solid, level surface outside the pool. Ensure it is stable before use. Always remove the ladder when the pool is not in use to prevent unsupervised access.





Image: The INTEX pool safety ladder, featuring grey metal frame and white plastic steps.

3.6 Filling the Pool

Begin filling the pool with water. As the water level rises, smooth out any wrinkles in the pool liner from the center outwards. Fill the pool to the recommended water line, typically indicated on the pool liner or frame.

4. OPERATING INSTRUCTIONS

4.1 Krystal Clear™ Cartridge Filter Pump

The included 1000 GPH Krystal Clear™ Cartridge Filter Pump is designed to keep your pool water clean and clear. It incorporates Hydro Aeration Technology for improved circulation, filtration, water clarity, and increased negative ions.

KRYSTAL CLEAR C1,000 ENHANCED FILTRATION

2- to 12-hour adjustable cycles
with automatic daily filtration

Easy-to-clean replaceable
filter cartridge

Quick and easy
pump installation

Air-release valve for
easy pump priming

CARTRIDGE FILTER PUMP

1,000 GPH



Improves water
clarity and freshness




HYDRO AERATION[®]
TECHNOLOGY



Image: A graphic detailing the features of the Krystal Clear C1000 Enhanced Filtration system, including 2- to 12-hour adjustable cycles, easy-to-clean filter cartridge, quick pump installation, air-release valve, and Hydro Aeration Technology.

- **Daily Operation:** Run the filter pump for 2-12 hours daily, depending on pool usage and water conditions. Refer to the pump manual for specific recommendations.
- **Priming:** Before first use and after cleaning the filter, ensure the pump is properly primed by opening the air-release valve until water flows out.
- **Hydro Aeration Technology:** This system enhances water quality by injecting air into the water, which helps to oxidize impurities and improve overall water freshness.

4.2 Water Chemistry

Maintaining proper water chemistry is essential for a safe and enjoyable swimming experience. Test your pool water regularly (daily or every other day) using a reliable test kit.

- **pH Level:** Maintain pH between 7.4 and 7.6.
- **Chlorine Level:** Maintain free chlorine between 1-3 ppm (parts per million).

- **Alkalinity:** Maintain total alkalinity between 80-120 ppm.
- **Sanitizer:** Add appropriate pool sanitizer (e.g., chlorine tablets or liquid) as needed, following product instructions.

5. MAINTENANCE

5.1 Filter Cartridge Cleaning and Replacement

The filter cartridge should be rinsed with a garden hose every few days and replaced every 2 weeks, or sooner if it becomes heavily soiled.

1. Turn off and unplug the filter pump.
2. Close the plunger valves on the pool's inlet and outlet to prevent water flow.
3. Unscrew the filter housing lid and remove the cartridge.
4. Rinse thoroughly or replace with a new Intex Type A filter cartridge.
5. Reassemble the pump, open plunger valves, and restart.

5.2 Pool Cleaning

- **Skimming:** Regularly remove leaves and debris from the water surface using a pool skimmer.
- **Vacuumping:** Use a pool vacuum to clean the pool floor as needed.
- **Liner Care:** The 3-ply puncture-resistant PVC material is designed for durability. In case of minor damage, use the included repair patch.

5.3 Pool Cover Usage

Use the included pool cover when the pool is not in use to keep out debris, reduce evaporation, and maintain water temperature. Secure it with the rope tie.

Pool Cover

- Durable material
- Rope tie helps keep cover from blowing off



Image: A diagram illustrating the pool cover placed over the pool, secured with a rope tie.

5.4 Winterization (Off-Season Storage)

Before storing the pool for the off-season, completely drain the water, clean all components, and ensure they are thoroughly dry. Store the liner and frame parts in a dry, temperature-controlled environment to prevent damage.

6. TROUBLESHOOTING

Problem	Possible Cause	Solution
Cloudy Water	Poor filtration, improper chemical balance, high bather load	Check/clean filter cartridge, test and adjust water chemistry, run pump longer
Pump Not Working	No power, clogged impeller, air in system	Check power connection/GFCI, clean impeller, prime pump
Water Leaking from Pump/Hoses	Loose connections, damaged O-rings/gaskets, cracked housing	Tighten connections, inspect and replace O-rings/gaskets, contact support for damaged parts
Pool Liner Leak	Puncture or tear	Locate leak, clean area, apply included repair patch

7. SPECIFICATIONS

INTEX®

15FT

PRISM FRAME™ ROUND POOL SET



 **4,440 gal**
WATER CAPACITY

Image: A graphic illustrating the dimensions of the INTEX Prism Frame 15ft x 48in pool, showing a 15ft diameter, 48in height, 42in water depth, and a water capacity of 4,440 gallons.

- **Model Number:** 26725EH
- **Pool Shape:** Round
- **Pool Dimensions:** 15 ft (4.57 m) Diameter x 48 in (1.22 m) Height
- **Water Capacity (90%):** 4,440 gallons (16,805 liters)
- **Material:** Powder-coated steel frame, 3-ply puncture-resistant PVC liner
- **Filter Pump Flow Rate:** 1000 GPH (3,785 L/hr)
- **System Flow Rate:** 750 GPH (2,839 L/hr)
- **Filter Cartridge Type:** Intex Type A
- **Ladder Max Weight Capacity:** 300 lbs (136 kg)
- **UPC:** 078257267255

8. WARRANTY AND SUPPORT

This INTEX Prism Frame Pool Set comes with a **1-Year Manufacturer's Warranty** from the date of purchase. This warranty covers defects in materials and workmanship under normal use and service.

For warranty claims, missing parts, or technical assistance, please contact Intex Consumer Service directly. Have your model number, serial number (if applicable), and proof of purchase ready.

Intex Contact Information: Please refer to the contact details provided in your product packaging or visit the official Intex website for the most current support information.

© 2023 Intex Recreation Corp. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question