

C-LITE
LED LIGHTING
C-TR-C-BT Series
Surface Mount Kit



C-LITE C-TR-C-BT Series Surface Mount Kit Instruction Manual


[Home](#) » [C-LITE](#) » C-LITE C-TR-C-BT Series Surface Mount Kit Instruction Manual 

Contents

- [1 C-LITE C-TR-C-BT Series Surface Mount Kit](#)
- [2 IMPORTANT SAFEGUARDS](#)
- [3 SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE](#)
- [4 SEPECIFICATION](#)
- [5 CONTACT](#)
- [6 Documents / Resources](#)
 - [6.1 References](#)
- [7 Related Posts](#)

C-LITE
LED LIGHTING

C-LITE C-TR-C-BT Series Surface Mount Kit

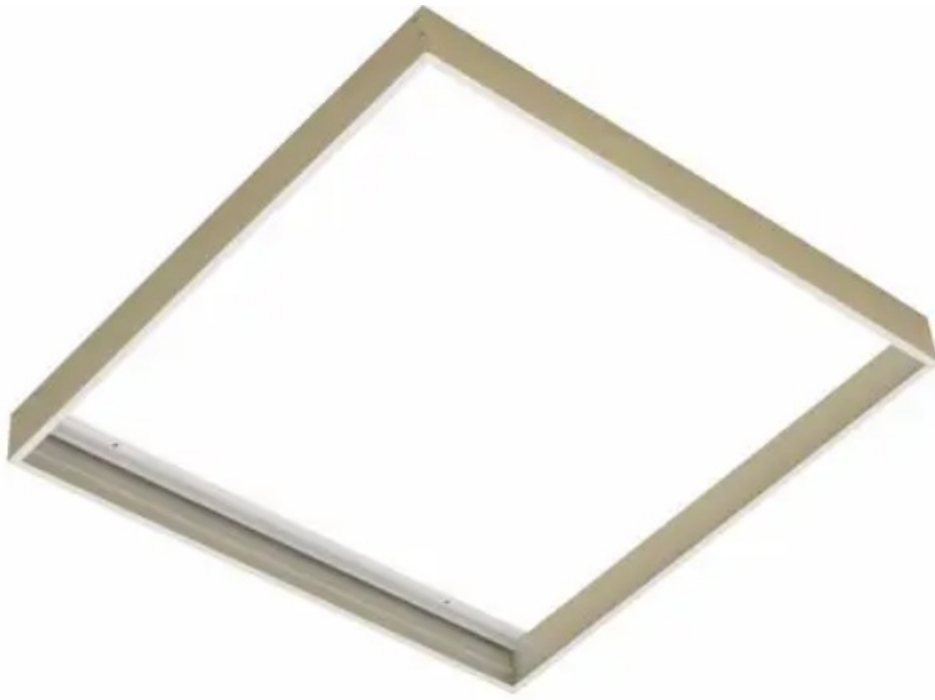

CAUTIONS

IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed, including the following:

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

1. DANGER- Risk of shock- Disconnect power before installation.
2. This luminaire must be installed in accordance with the NEC or your local electrical code. If you are not familiar with these codes and requirements, consult a qualified electrician.

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE

INSTALLATION

1. Assemble A and B sides of the surface mount frame using (4) plastic corners. See Figure 1 for the proper positioning of the sides. See Figures 2 and 3 for the insertion of plastic corners.

FIGURE 1

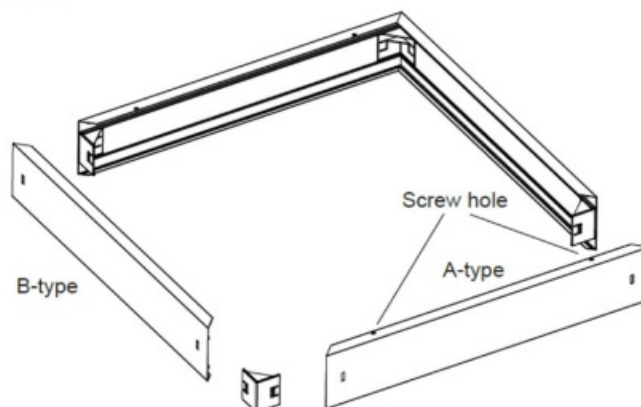


FIGURE 2



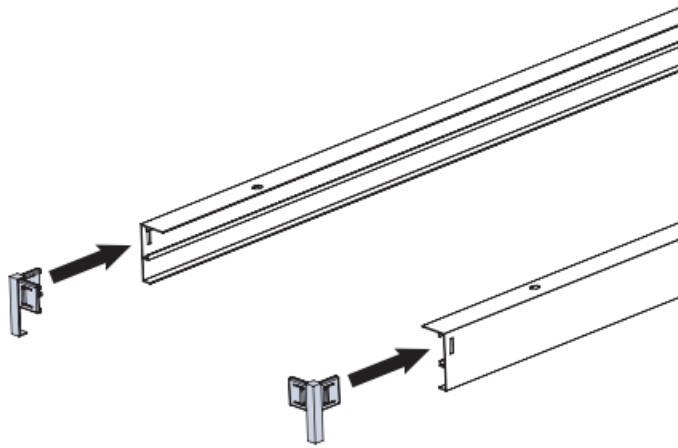


FIGURE 3

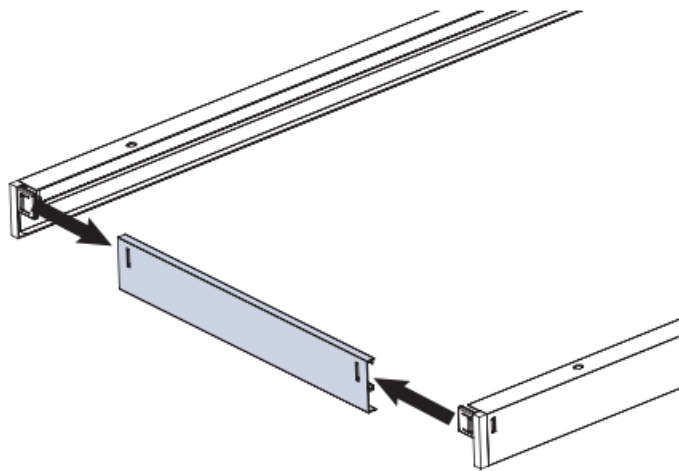

2. Use the assembled frame as a template and mark the hole locations for the expansion anchors on the mounting surface. Use 1/4" drywall drill bit to drill holes for the expansion anchors. Drive expansion anchors into the drywall.
3. Attach frame to mounting surface using (4) supplied pan head screws. See Figure 4.


FIGURE 4

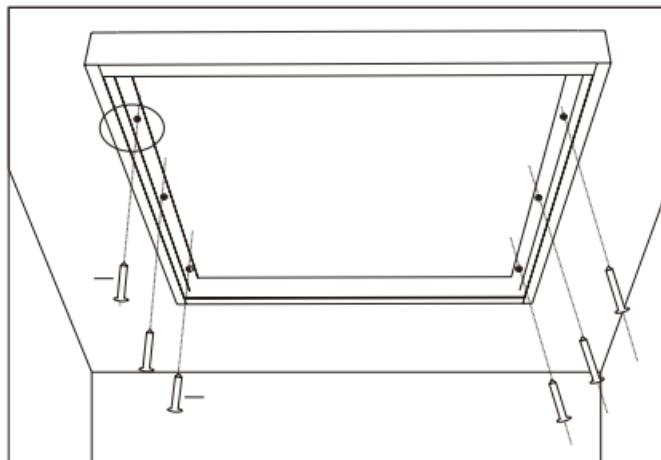

NOTE: 2' x 4' frame uses (6) supplied pan head screws


4. Once the frame has been securely attached to the mounting surface, remove B2 side of the frame to allow for insertion of the fixture. See Figure 5.

FIGURE 5

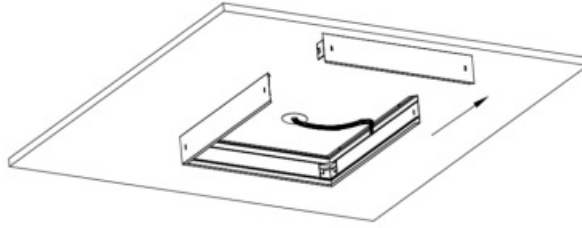


5. Slide the fixture partly into the frame. See Figure 6. Make wiring connections in the fixture wiring chamber as detailed in the Fixture Wiring section of the installation instructions included with the fixture. Select the desired CCT and wattage using the dip switches on the driver enclosure.

FIGURE 6

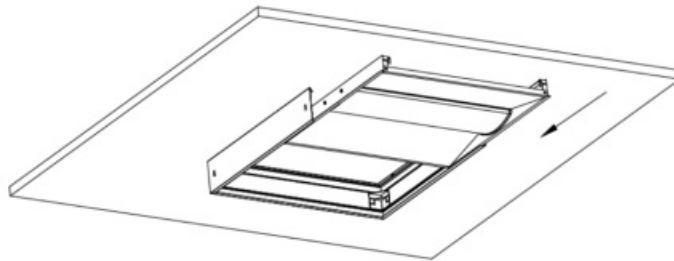

6. Once fixture wiring is complete, close the fixture wiring chamber and slide fixture fully into the frame. See Figure 7.

FIGURE 7

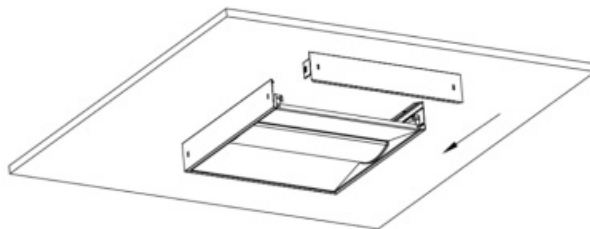

7. Reassemble the B side of the frame by sliding the plastic corners on the B side into the openings on the sides of the frame.


SEPECIFICATION

- Document: LPN00665X0002A0_A
- Date:7-08-2024
- Created By:TMT

CONTACT

<http://lighting.cree.com/warranty> | 1-800-236-6800

Documents / Resources

	<p>C-LITE C-TR-C-BT Series Surface Mount Kit [pdf] Instruction Manual C-TR-C-BT Series Surface Mount Kit, C-TR-C-BT Series, Surface Mount Kit, Mount Kit</p>
---	--

References

- [User Manual](#)

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.