

CARLSBRO EDA80B Drum Amplifier



CARLSBRO EDA80B Drum Amplifier Instructions

[Home](#) » [CARLSBRO](#) » CARLSBRO EDA80B Drum Amplifier Instructions 

Contents

- [1 CARLSBRO EDA80B Drum Amplifier](#)
- [2 Product Usage Instructions](#)
- [3 SPECIFICATIONS](#)
- [4 IMPORTANT SAFETY SYMBOLS](#)
- [5 IMPORTANT SAFETY INSTRUCTIONS](#)
- [6 FRONT PANEL](#)
- [7 REAR PANEL](#)
- [8 Documents / Resources](#)
 - [8.1 References](#)
- [9 Related Posts](#)



CARLSBRO EDA80B Drum Amplifier



Product Specifications

- Compliance: Part 15 of FCC Rules
- Class: B

Product Usage Instructions

1. FCC Compliance

This device complies with part 15 of the FCC Rules. It is important to ensure that the device does not cause harmful interference and accepts any interference received.

2. Class B Device

This device is classified as a Class B device, which signifies its specific technical standards and requirements for electromagnetic compatibility.

Frequently Asked Questions (FAQ)

• Q: What should I do if the device causes interference?

A: If the device causes interference, try repositioning it or contacting customer support for assistance in resolving the issue.

sec AUDIO Ltd

- Unit 11, Tore MK, Chippenham Drive, Milton Keynes, MK10 0BZ. United Kingdom
- Tel: +44(0)1908 281072
- Web: www.carlsbro.com
- Email: info@carlsbro.com

SPECIFICATIONS

Model	EDA80B	Electronic Drum Amplifier
Output Power (RMS 1%)	5 Watts @ 4 Ohms (x1)	Tweeter (stereo)
	80 Watts @ 4 Ohms (x1)	Subwoofer (mono)
	500 mWatts @ 32 Ohms	Output to headphones (stereo)
Frequency Response	20 Hz - 20 kHz	Tailored for accurate frequency response of for electronic drums
Hum and Noise	-64 dBV	Controls at 0
	-62 dBV	Controls at 5
Input Impedance	10K Ohms	All inputs
Input Levels	-12 dBV	main input
	- 2.5 dBV	auxiliary / bluetooth inputs
External Outputs	XLR balanced line output	D.I output (pin1 shield, 2 +, and 3-).
Tone controls (EQ Centers)	80Hz, 3.15KHz, 12.5KHz	3 band eq - low, mid, hi. +8/-12dB
AC Power Requirements	130 Watts	At full output
	7 Watts	On standby
Speakers	12" (305 mm) woofer	Special design, 4 Ohms rated 80 Watts RMS
	3" (76mm) Tweeter	Special design, 4 Ohms rated 5 Watts RMS

IMPORTANT SAFETY SYMBOLS



The symbol is used to indicate that some hazardous live terminals are involved within this apparatus, even under the normal operating conditions, which may be sufficient to constitute the risk of electric shock or death.



- The symbol is used in the service documentation to indicate that specific component shall be replaced only by the component specified in that documentation for safety the component specified in that documentation for safety reasons.



- Protective grounding terminal



- Alternating current/voltage



- **Hazardous live terminal**
 - ON: Denotes the apparatus is turned on.
 - OFF: Denotes the apparatus is turned off.

WARNING: Describes precautions that should be observed to prevent the danger of injury or death to the operator.

- **CAUTION:** Describes precautions that should be observed to prevent danger of the apparatus.



- Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.

IMPORTANT SAFETY INSTRUCTIONS

- Read these instructions.
- Heed all warning.
- Keep these instructions.
- Follow all instructions.


- **Water & Moisture**

The apparatus should be protected from moisture and rain, can not used near water, for example: near bathtub, kitchen sink or a swimming pool, etc.

- **Heat**

The apparatus should be located away from the heat source such as radiators, stoves or other appliances that produce heat.

FRONT PANEL

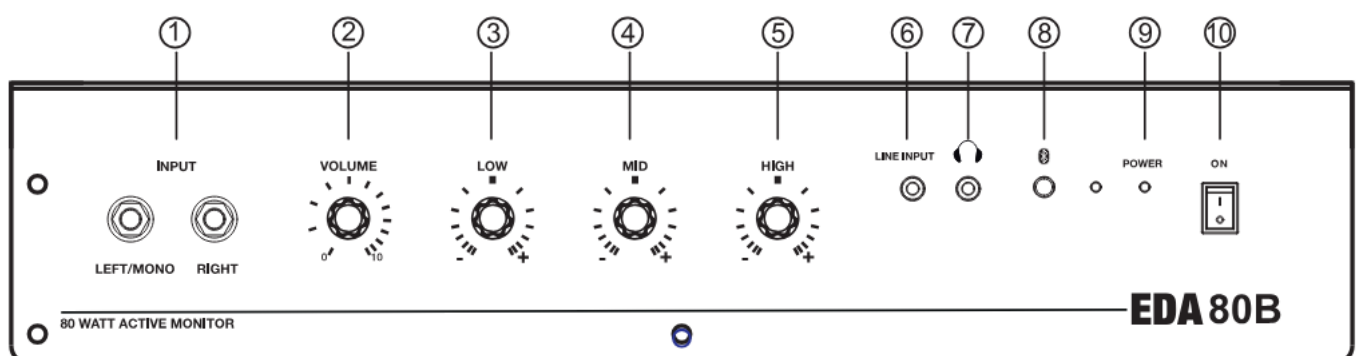

1. INPUT

2×1/4" jack, left and right (stereo). Left Mono (mono).

2. VOLUME

Volume level for main input.

3. LOW

Low frequency control, centered at 80Hz with 8dB boost, 12 dB cut.

4. MID

Mid frequency control, centered at 3.15kHz with 8dB boost, 12 dB cut.

5. HIGH

High frequency control, centered at 12kHz with 8dB boost, 12 dB cut.

6. LINE INPUT 1x1/8" stereo jack. Wired auxiliary input for CD/MP3 player. Volume and tone is controlled via your external device.

7. HEADPHONE 1x 1/8" stereo jack. Headphones combine all inputs: INPUT, LINE INPUT/ BLUETOOTH.

Headphone input will bypass internal speakers. Tailored to 32 Ohm headphones.

8. BLUETOOTH BUTTON

Press and hold for 2-3 seconds to share the bluetooth signal (light flashing) Turn on your mobile device's Bluetooth to search for device name EDA80B, select and pair (light static) Volume and tone is controlled via your mobile device. Press and hold Bluetooth button for 2-3 seconds to turn off bluetooth signal.

9. POWER LIGHT


When the power supply is turned on. the indicator light will be blue. If there is no signal input for more than 2 minutes the EDA80B will enter standby mode and the power indicator will turn red. When a signal is detected, the indicator remain blue.

10. POWER SWITCH

EDA80B ON/OFF

Note: Please do not switch on and off repeatedly within a short period of time, to avoid internal damage.

REAR PANEL

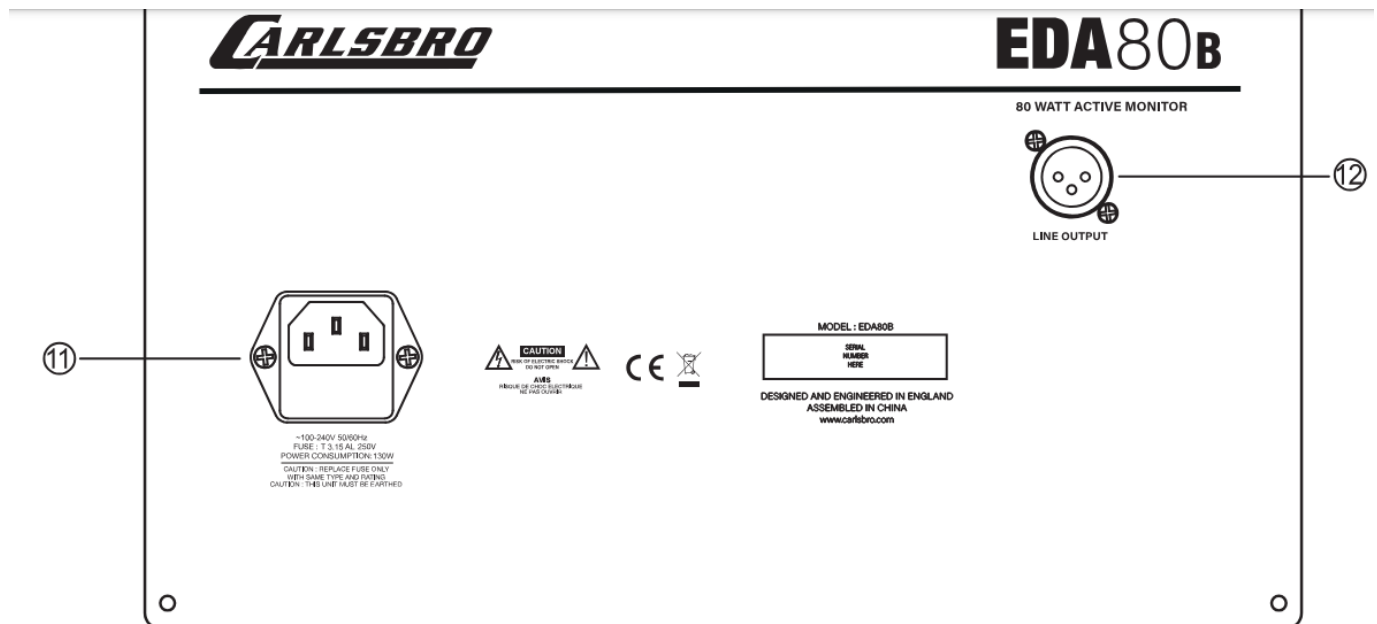

Warning:

This device complies with part 15 of the FCC Rules.

Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

Class B device:


NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

- If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
 - Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment

The distance between user and products should be no less than 20cm.

Documents / Resources

	CARLSBRO EDA80B Drum Amplifier [pdf] Instructions EDA80B, EDA80B Drum Amplifier, Drum Amplifier, Amplifier
---	---

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.